

date 05/03/2013

page 1 of 3

MODEL: CMT-1203-SMT | DESCRIPTION: PIEZO BUZZER TRANSDUCER

FEATURES

- low current
- · side sound port
- · externally driven






SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
operating voltage				25	Vp-p
current consumption	at 5 Vp-p, 4,000 Hz square wave			5	mA
rated frequency			4,000		Hz
sound pressure level	at 10 cm, 5 Vp-p, 4,000 Hz square wave	81			dB
electrostatic capacity	at 120 Hz/1 V	11,200	16,000	20,800	pF
dimensions	12 x 12 x 3				mm
weight				0.5	g
material	L.C.P. (black)				
terminal	SMT type (Sn plating)				
operating temperature		-40		120	°C
storage temperature		-40		120	°C
RoHS	yes				


Note: Add suffix "-TR" to the model for tape & reel packaging

SOLDERABILITY


parameter	conditions/description	min	typ	max	units
reflow soldering	see reflow solder profile			260	°C

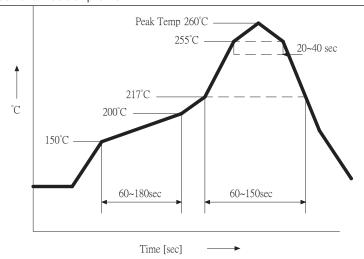

MECHANICAL DRAWING

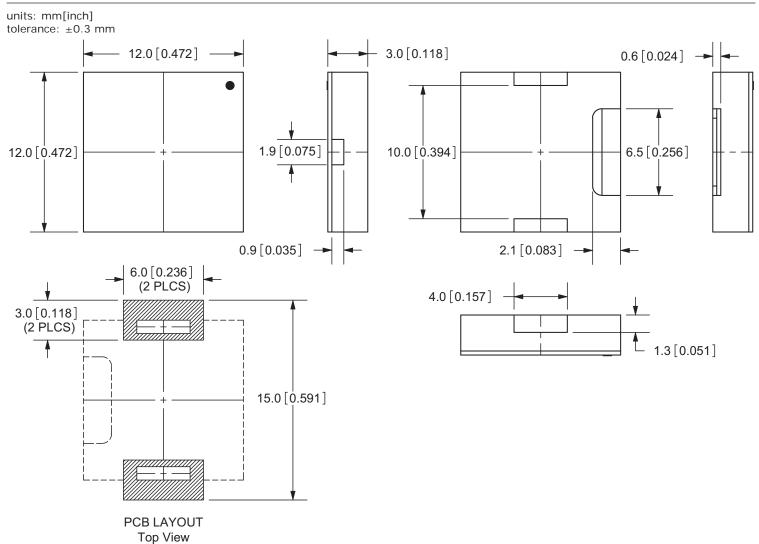

FREQUENCY RESPONSE CURVE

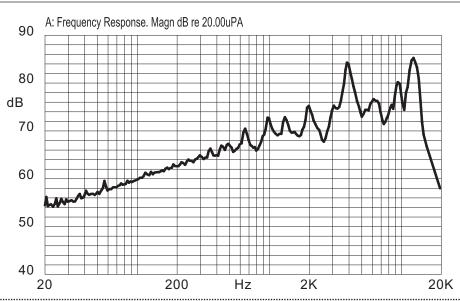

REVISION HISTORY

rev.	description	date	
1.0	initial release	06/01/2010	
1.01	updated part number, added TR package option, applied new spec template	05/03/2013	

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters 20050 SW 112th Ave. Tualatin, OR 97062 **800.275.4899**

Fax 503.612.2383 **cui**.com techsupport@cui.com

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CUI Inc.:

CMT-1203-SMT-TR