

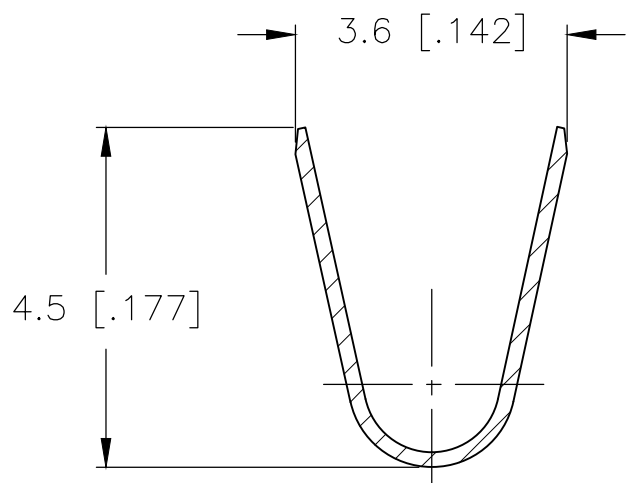
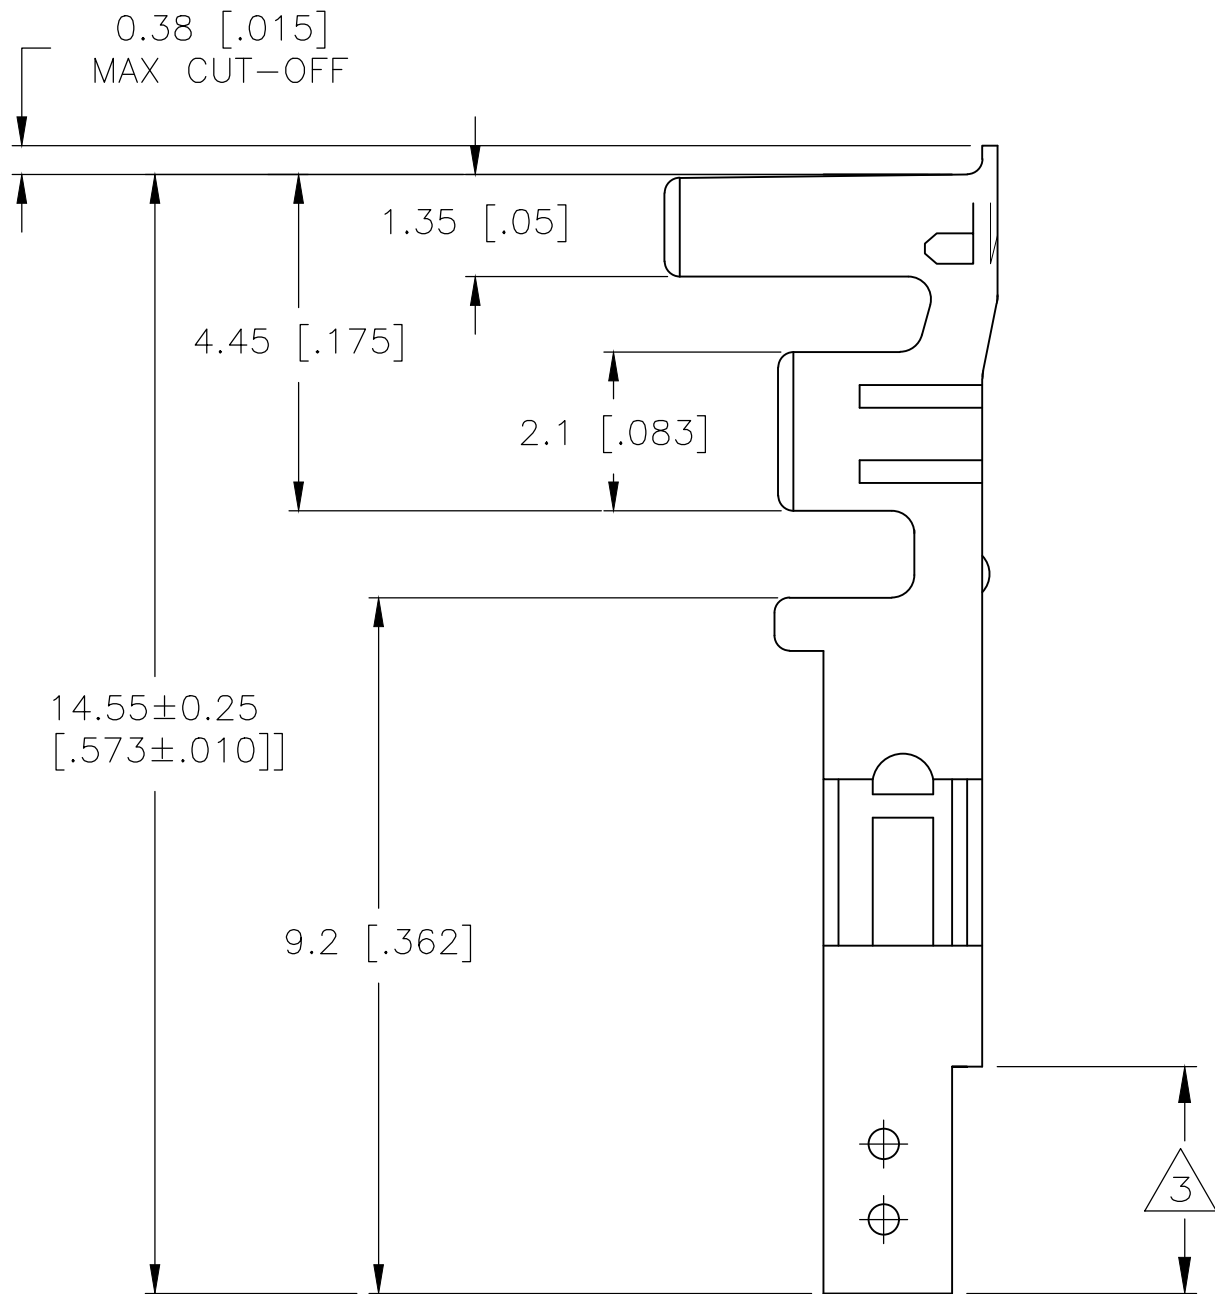


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B3	REVISED PER ECR-17-017263	23NOV2017	JZ	DZ


- 1 WIRE RANGE: 1.31mm² (16 AWG).
- 2 INSULATION RANGE: DIA 1.80–3.10 mm [.071–.122 in]
- 3 FINISH: 0.76µm MINIMUM GOLD OVER 1.27µm MINIMUM NICKEL REQUIRED ON INNER SURFACE, PERMITTED ON OUTER SURFACE.
- 4 FINISH: 2.54µm MINIMUM TIN ON ALL SURFACES IN THIS AREA.

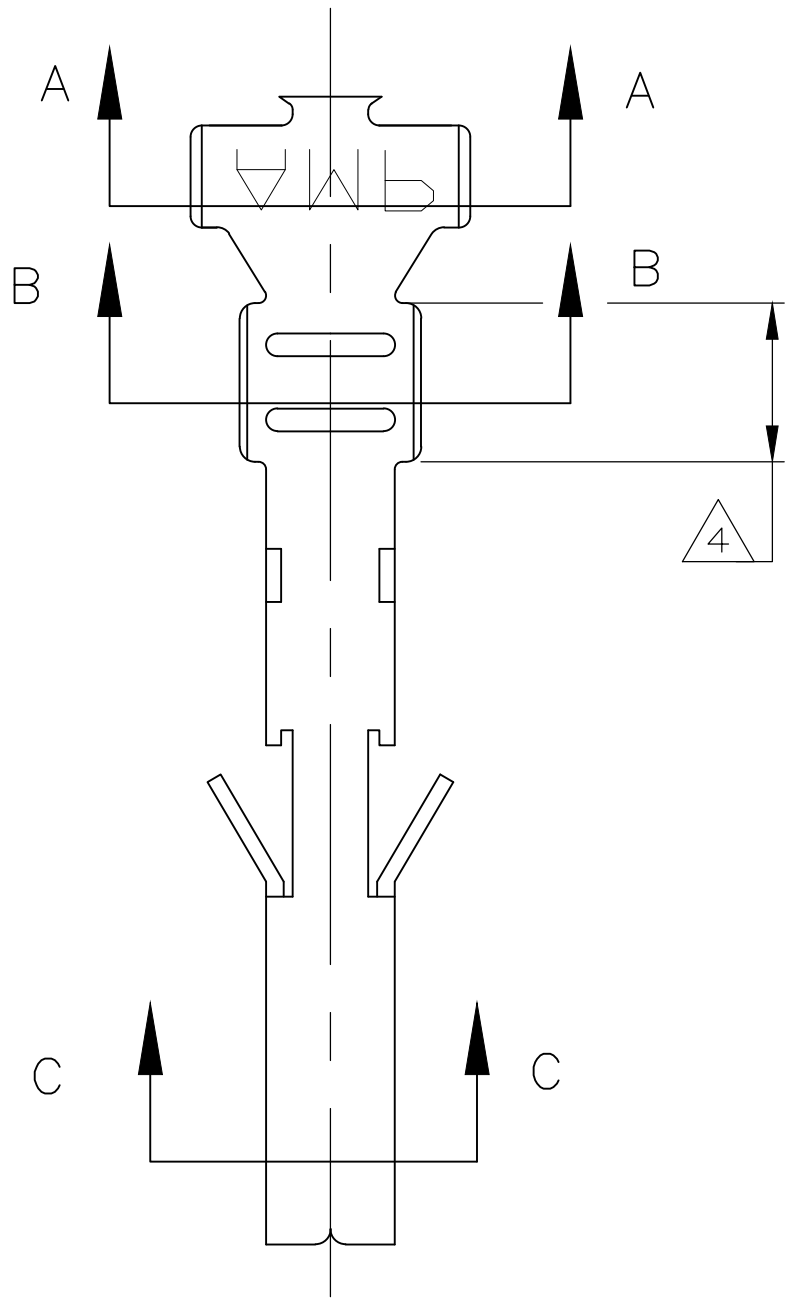

SECTION A-A

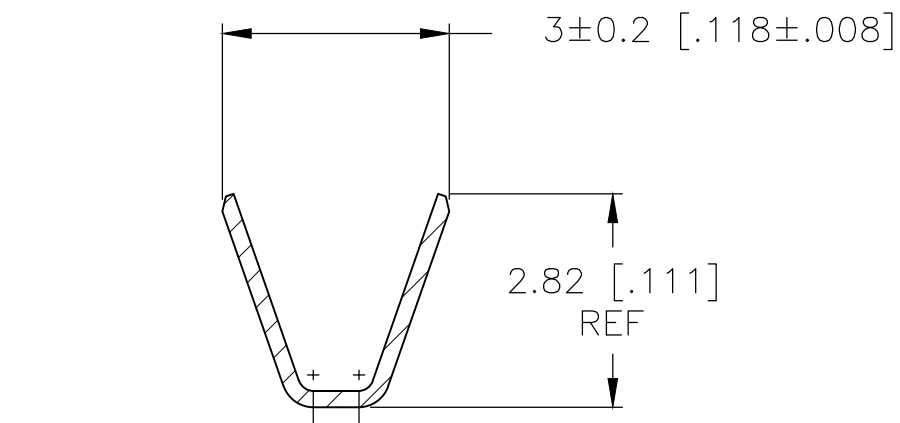

SECTION B-B

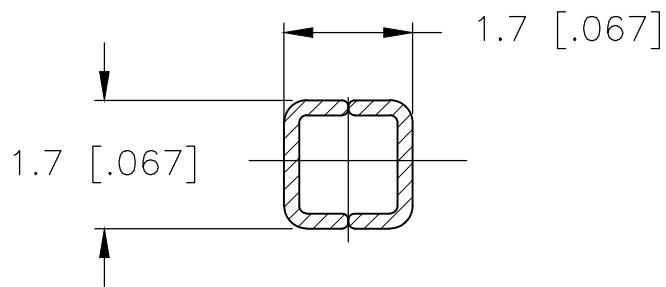

SECTION C-C

GOLD 3 4	PHOS. BRZ.	1586841-4
PRE-TIN	PHOS. BRZ.	1586841-3
GOLD 3 4	BRASS	1586841-2
PRE-TIN	BRASS	1586841-1
FINISH:	MATERIAL:	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER CHK C. CASH APVD C. CASH PRODUCT SPEC APPLICATION SPEC	04APR2007 04APR2007 04APR2007	 TE Connectivity				
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME				
	0 PLC ±		1 PLC ± 0.2 [.01]		TERMINAL VAL-U-LOK(TM) SOCKET (LOOSE PIECE)			
	2 PLC ± 0.13 [.005]							
	3 PLC ± 0.254 [.0100]							
	4 PLC ±							
	ANGLES ±							
MATERIAL	FINISH	WEIGHT		SIZE A2	CAGE CODE 00779	DRAWING NO C=1586841	RESTRICTED TO —	
SEE TABLE	SEE TABLE	CUSTOMER DRAWING				SCALE 10:1	SHEET 1 of 1	REV B3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1586841-3](#)