


VLM10555T-R45M110-3H

Applications	 Automotive Grade
Feature	 Wire Wound
	 Magnetic Shield
	 Ferrite Core
	 AEC-Q200
Series	VLM Series / VLM10555-3H Type
Status	Production

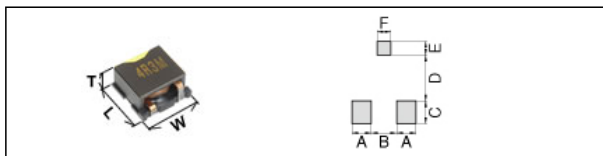





Size	
Length(L)	10.30mm +0.20mm
Width(W)	10.60mm +/-0.20mm
Thickness(T)	5.40mm +/-0.20mm
Recommended Land Pattern (A)	2.60mm Nom.
Recommended Land Pattern (B)	3.40mm Nom.
Recommended Land Pattern (C)	3.00mm Nom.
Recommended Land Pattern (D)	6.10mm Nom.
Recommended Land Pattern (E)	1.90mm Nom.
Recommended Land Pattern (F)	1.80mm Nom.

Electrical Characteristics	
Inductance	450nH +/-20% at 100kHz
Rated Current (L Change) [Max.]	40A (25% Down)
Rated Current (Temperature Rise) [Typ.]	11A (40degC Rise)
Rated Current (Temperature Rise) [Max.]	
DC Resistance [Nom.]	2.2mΩ
DC Resistance [Max.]	2.6mΩ

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 125degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	Yes
Packing	Blister (Plastic)Taping [330mm Reel]
Package Quantity	500Pcs Min.
Weight	1.7g

VLM10555T-R45M110-3H




Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

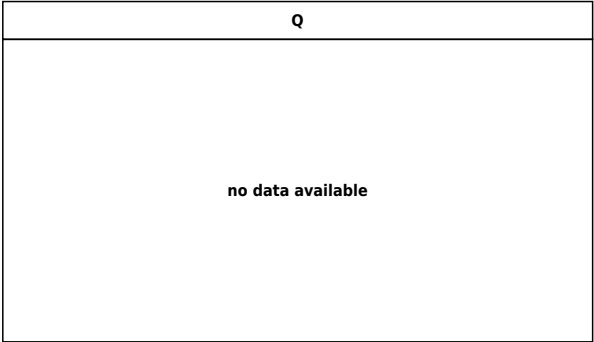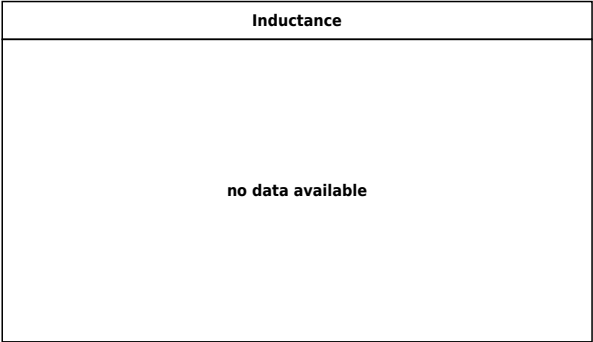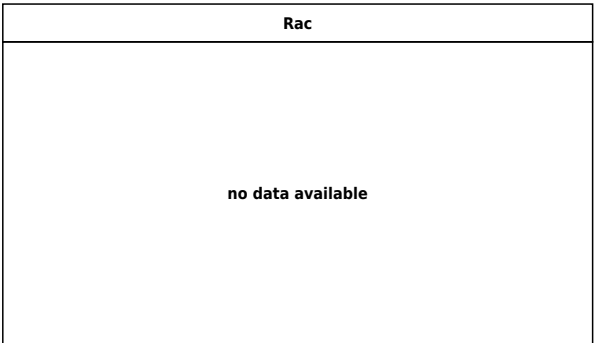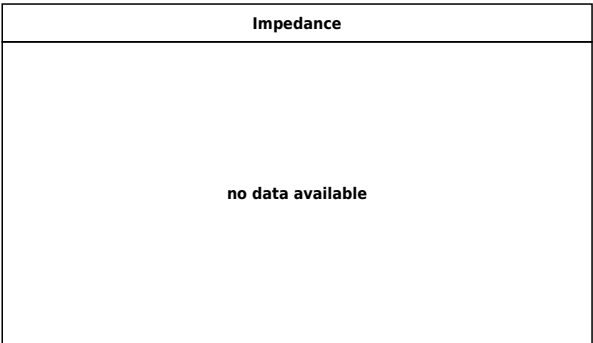

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.

VLM10555T-R45M110-3H

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

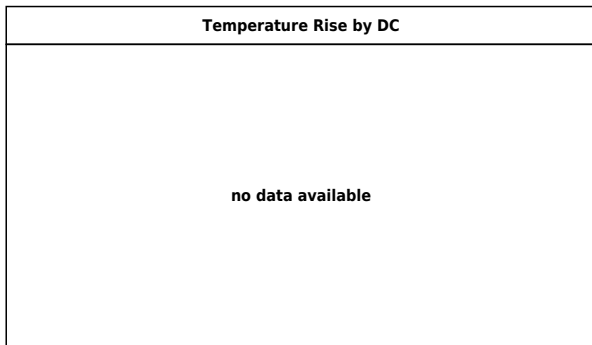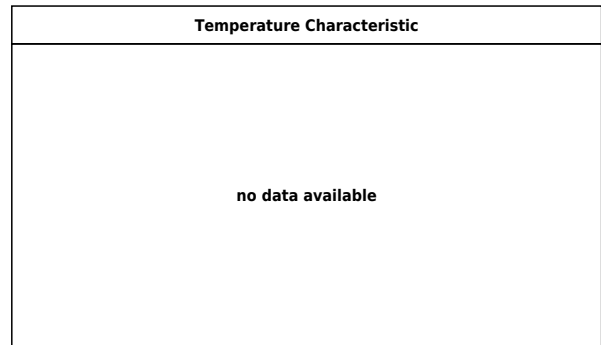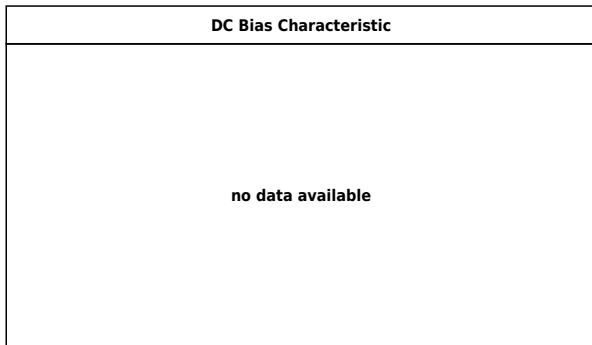

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK:

[VLM10555T-R45M110-3H](#)