

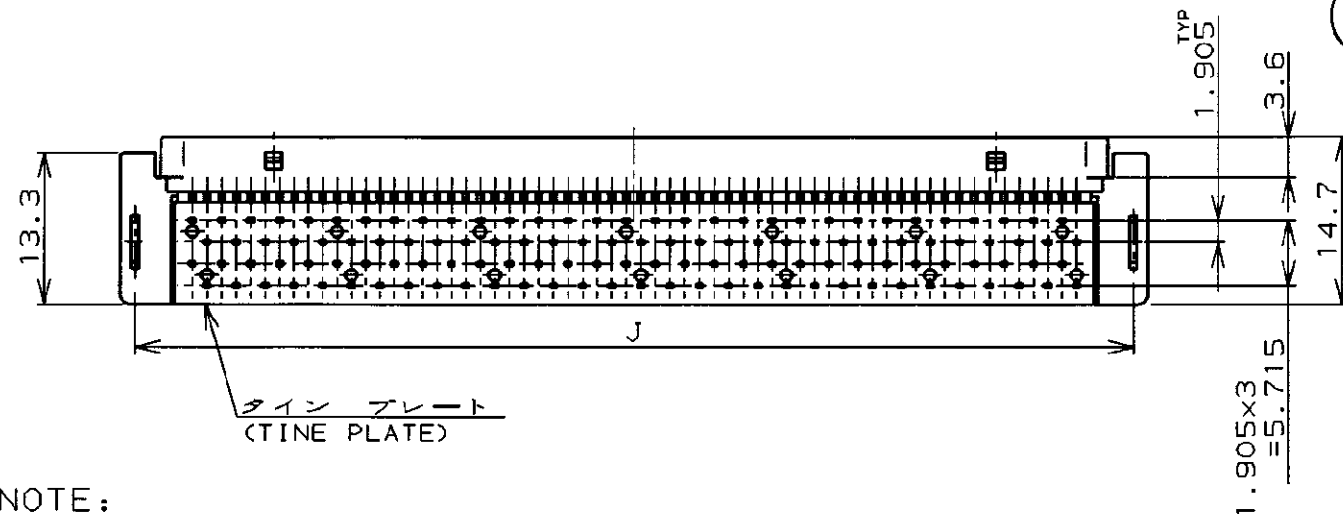


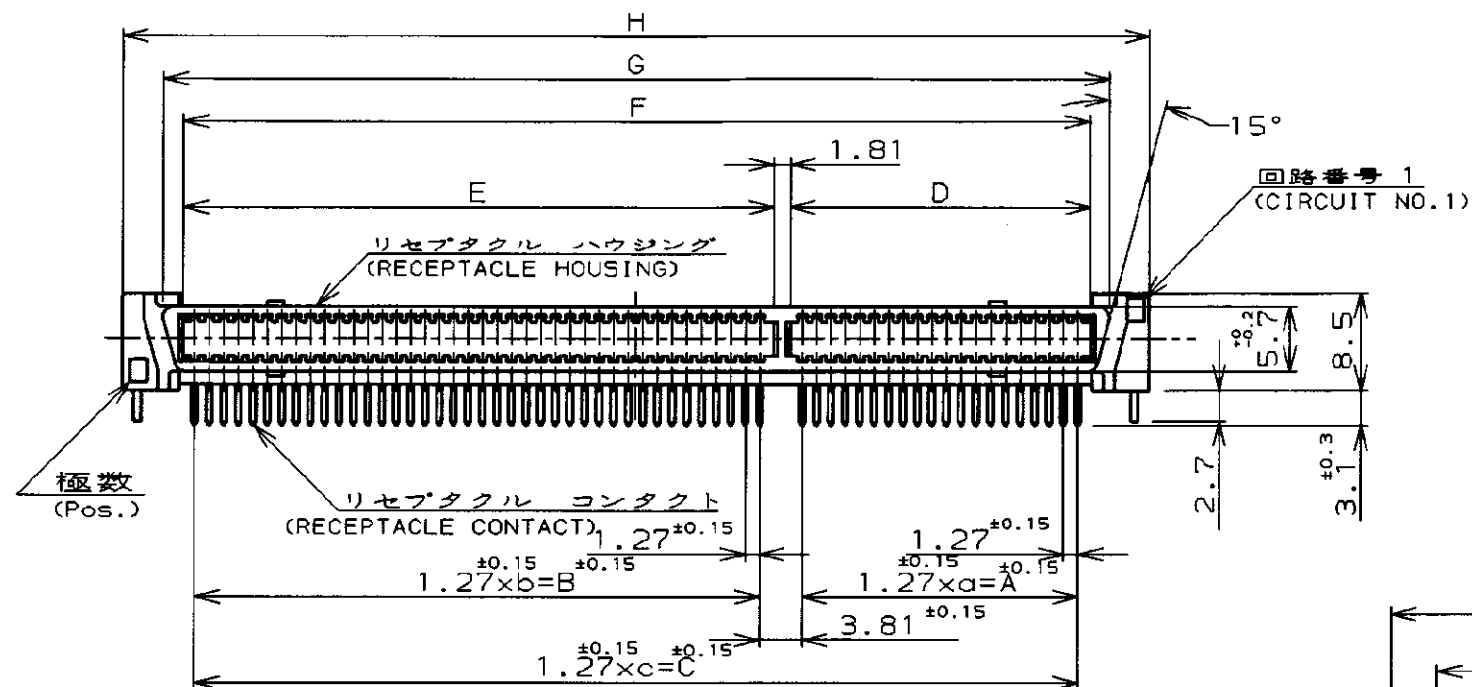

NOTE:


- △1 MATERIAL:HOUSING, TINE PLATE;THERMOPLASTICS
(UL 94V-0) BLACK
CONTACT:COPPER ALLOY
RETENTION LEG:COPPER ALLOY
- △2 FINISH:CONTACT:Au AT CONTACT AREA
TIN AT TINE, OVER Ni
RETENTION LEG:TIN, OVER Ni

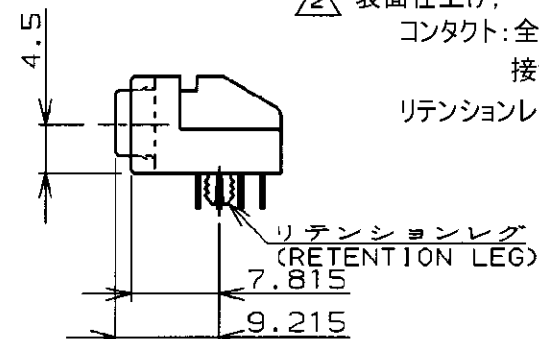

注記：

- △1 材料:ハウジング、タインプレート;熱可塑性樹脂
(UL 94V-0) 色:黒
コンタクト:銅合金
リテンションレグ:銅合金
- △2 表面仕上げ;
コンタクト:全面ニッケル下地めっき
接触部金めっき、脚部すずめっき
リテンションレグ:ニッケル下地めっきにすずめっき

鉛フリー
LEAD FREE

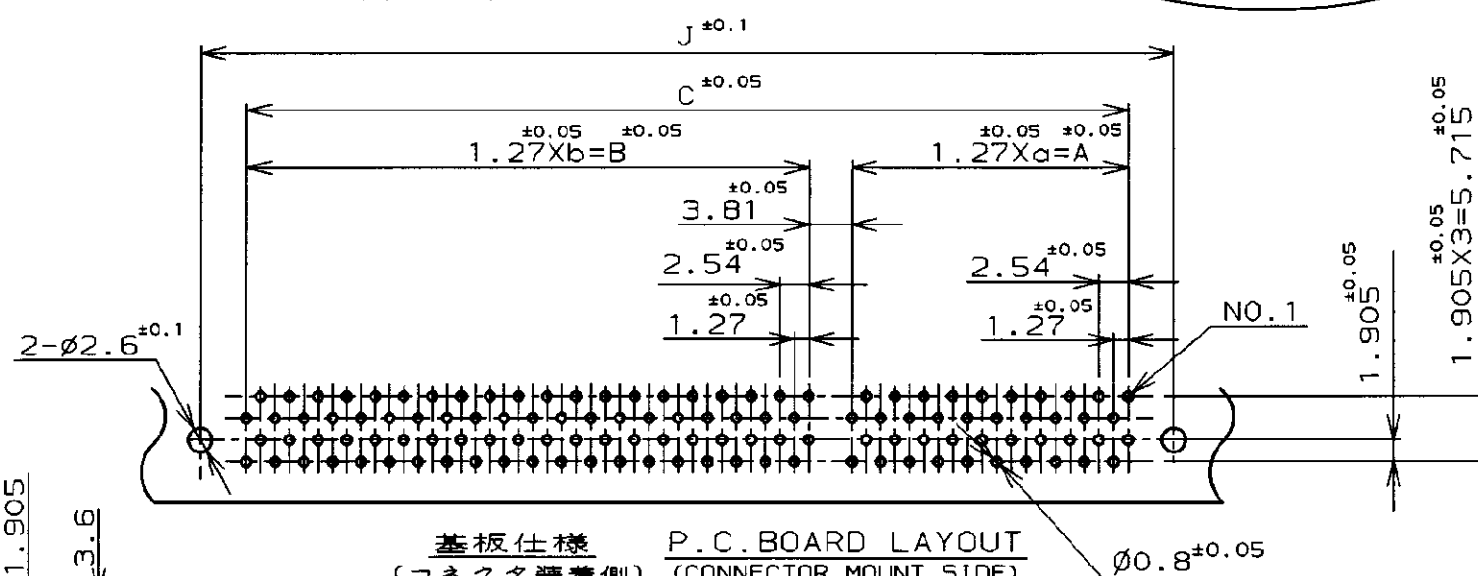

基板仕様 P.C. BOARD LAYOUT
(コネクタ装着側) (CONNECTOR MOUNT SIDE)

	180	39	49.53	49	62.23	—	115.57	51.53	64.23	117.57	120.66	128.19	125.54		▲	-8
E	160	29	36.83	49	62.23	—	102.07	38.83	64.23	104.07	107.96	115.49	112.84			7
	140	29	36.83	39	49.53	—	90.17	38.83	51.53	92.17	95.26	102.79	100.14			-6
	120	19	24.13	39	49.53	—	77.47	26.13	51.53	79.47	82.56	90.09	87.44			-5
	100	—	—	—	—	49	62.23	—	—	64.23	67.32	74.85	72.2			-4
	80	—	—	—	—	39	49.53	—	—	51.53	54.62	62.15	59.5			-3
	60	—	—	—	—	29	36.83	—	—	38.83	41.92	49.45	46.8			-2
	40	—	—	—	—	19	24.13	—	—	26.13	29.22	36.75	34.1			5176379-1
Pos.	a	A	b	B	c	C	D	E	F	G	H	J				P/N

							 TE Connectivity	
					WIRE RANGE $\frac{\text{mm}^2 \text{ (AWG -)}}{\text{mm}^2}$		INSULATION DIA $\frac{\text{mm}^2}{\text{mm}}$	
					MATERIAL 		FINISH 	
					NAME AMP FH CONNECTOR RECEPTACLE WITH RETENTION LEG (HORIZONTAL)			
P1	REVISED PER ECR-12-013273	28MAR2013	K.M	E.T	GENERAL TOLERANCE 0<= 10 : ±0.2 10<= 30 : ±0.25 30<= 100 : ±0.3 ANGLES : ±3°		SIZE B	LOC J
P	ECO-11-005030	23MAR11	RK	HMR	DE T.KAWAMAE 09JUN04		NUMBER C- 5176379	
LTR	DESCRIPTION	DATE	DWN	APVD	CHK I.ENOMOTO 09JUN04	APP I.ENOMOTO 09JUN04	SCALE NTS	REV. P1
							SHEET 1 OF 1	

CUSTOMER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5176379-3](#)