




Sealed Nickel-Metal Hydride Rechargeable Batteries

Model:NH-3000SC

Specifications


Nominal Voltage		1.2 Volt
Rated Capacity		3000 mAh
Dimensions	Diameter in. (mm)	0.87 (22.1)
	Height in. (mm)	1.65 (42.0)
	Height with solder tabs	1.69 (43.0)
	Weight Approx.	59 gm
	Internal Resistance	<11 mΩ
	Standard Charge (0.1C)	300 mA
	Trickle Charge	(0.03C)~(0.05C)
	Fast Charge ΔV	1500 mA
Recommended	Std/Trickle Charge	20±5°C
Operating	Fast Charge	20±5°C
Temperature	Discharge	20±5°C
Range	Storage	-20°C to 45°C
Standard Discharge (0.2C) Cut Off Voltage		1.0V per cell
High Rate Discharge (1 C) Cut Off Voltage		1.0V per cell

Dimensions

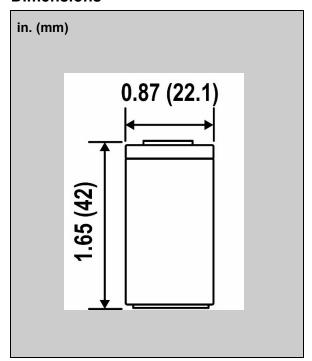

Charging and Discharging Characteristics


1.6




1C 1.5 Voltage (V) 0.05C 0.1C 1.1 20 40 60 80 100 120 140 160 Capacity Input (%)

Discharge Cycle Life

Standard Charge






Standard Battery Discharging (0.2C/0.5C/1C

Standard Battery Discharging (1C/2C/3C)



Please note the following graphs are for High Temperature and High Power batteries. These batteries do not form part of our standard range, but both types are available on request subject to minimum order quantities and delivery times. Please contact us for further details.


120

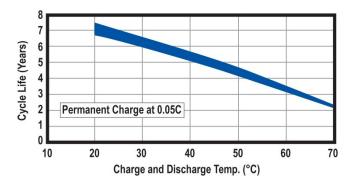


100 Discharge Capacity 80 60 Charge: 1C to 2.2 hrs. or -∆ Cut-off 40 Discharge: 10C to 0.8V 20 Ambient Temperature: 20°C 0 50 100 150 200 250 300 **Number of Cycles**

High Temp. Battery Charging and Discharging


High Power (10C Discharge) Cycle Life



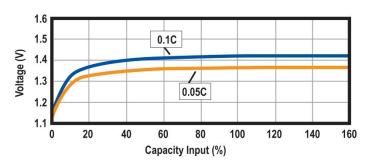

High Temp. Battery Discharge Cycle Life

High Temp. Battery Trickle Charge



High Power Battery Discharging (3C/5C/10C)

Corporate Headquarters and Domestic Sales

Power-Sonic Corporation • 7550 Panasonic Way • San Diego, CA 92154 •U.S.A
Phone: (619) 661-2020 • Fax: (619) 661.3650
Email Sales: national-sales@power-sonic.com
Email Customer Service: customer-service @power-sonic.com
E-mail Technical Support: technical-support@power-sonic.com

International Sales

Power-Sonic Corporation • P.O. Box 5242 • Redwood City, CA 94063 • U.S.A. Phone: (650) 364-5001 • Fax: (650) 366-3662
Email Sales: international-sales.com@power-sonic.com

www.power-sonic.com

© Copyright 2010 Power-Sonic Corporation. All rights reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information: