

BR1632

LITHIUM POLY-CARBONMONOFLUORIDE




Features & Benefits

- High voltage of 3 volts
- Extremely small self-discharge for long service and shelf life
- Compact and lightweight with extremely high energy density per unit weight
- Strong load pulse characteristics

Specifications


Nominal Capacity:	120 mAh
Nominal Voltage:	3V
Weight:	Approximately 1.5g
Operating Temperature:	-30°C - +80°C

Dimensions

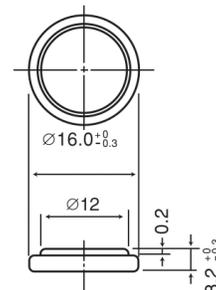


Note: This bare cell diagram is for size and reference only. BR1632 is only available with tabs.


Temperature Characteristics

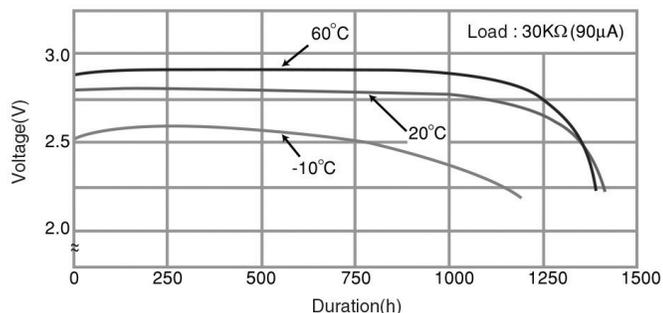

Capacity vs. Load Resistance

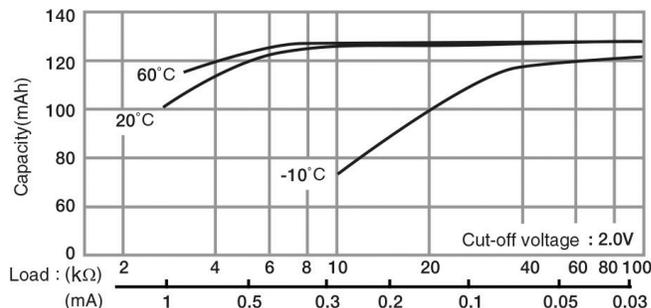

Operating Voltage vs. Load Resistance (voltage at 50% discharge depth)

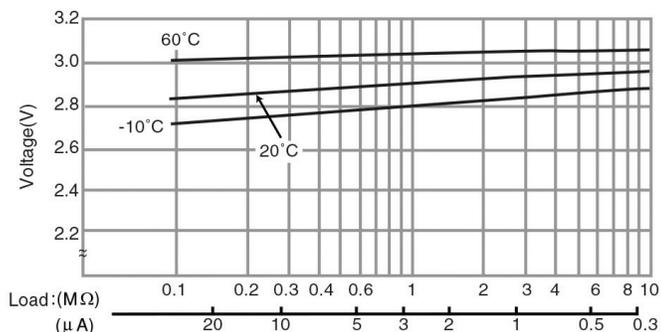

WARNING

Serious harm in as little as 2-hours if swallowed. **KEEP AWAY FROM CHILDREN.** Seek immediate medical help if swallowed. Have the doctor call the poison center at 1-(800) 498 8666 for US and Canada. International: 303-389-1300

Product manufacturers should design their products to meet the safety requirements of Annex I of UL60065 or equivalent standards.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic:](#)

[BR-1632/HFN](#) [BR-1632/V1AN](#) [BR1216](#) [BR2020](#) [BR1616](#) [BR-2032/GSN](#)