#### 1. SOLISTRAND\* TERMINALS AND SPLICES

#### **SOLISTRAND\* Terminals and Splices** (Refer to pages 4 and 5 for application tooling and accessories).









Pressure Type Wire Connector Chart (Use Type "W" Tooling)

WIRE SIZE RANGE	U <sub>L</sub> ) 424C LISTED	LR 7189 CERTIFIED					
22-16 Solid or Stranded	22-16 Solid or Stranded	22-16 Solid or Stranded					
16-14 Solid or Stranded	16-14 Solid or Stranded	16-14 Solid or Stranded					
12-10 Solid or Stranded	12-10 Stranded	12-10 Solid or Stranded					
8 Thru 600 MCM Solid or Stranded	8 Thru 600 MCM Stranded	8 Thru 4/0 Solid or Stranded					
	22-16 Solid or Stranded 16-14 Solid or Stranded 12-10 Solid or Stranded 8 Thru 600 MCM	22-16 Solid or Stranded 22-16 Solid or Stranded 16-14 Solid or Stranded 12-10 Solid or Stranded 12-10 Stranded 8 Thru 600 MCM 8 Thru 600 MCM					

**NOTE:** 22-16 terminals and splices are stamped 22-18 in accordance with MIL-T-7928.

Figure 1

### 1.1. Tool and Die Selections

### A. Hydraulic

Wire Size	Dies for 59973-1, 69065		Dies for 69067		59975-5, 69069 with/Self-	Dies for 48445-1,	Dies for 69082,	Dies for 69097		Dies for 69099,
	Nest	Indenter	Nest	Indenter	Contained Dies	1752788-1	1752786-1	Nest	Indenter	1752868-1
8	48126	48355	48126 <b>^</b> 48506 <b>^</b>	48355 <b>^</b> 48505 <b>^</b>	59975-1 69069			46146	46145	69216
8 H.D.	48128-1	48127-1	48128-1	48127-1						
6	48128	48127	48128 <b>^</b> 48508 <b>^</b>	48127 <b>^</b> 48507 <b>^</b>	59975-1 69069			46134	46133	69217
6 H.D.	48129-1	48127-1	48129-1	48127-1						
4	48129	48127	48129 <b>^</b> 48509 <b>^</b>	48127 <b>^</b> 48507 <b>^</b>	59975-1 69069			46135	46133	69218
4 H.D.	48130-1	48127-1	48130-1	48127-1						
2	48130	48127	48130 <b>^</b> 48510 <b>^</b>	48127 <b>^</b> 48507 <b>^</b>	59975-1 69069			46136	46133	45433
2 H.D.	48132-1	48131-1	48132-1	48131-1						
1/0	48132	48131	48132 <b>^</b> 48652 <b>^</b>	48131 <b>^</b> 48511 <b>^</b>				46138	46137	45436
1/0 H.D.	48133-1	48131-1	48133-1	48131-1						
2/0	48133		48133 <b>^</b> 48805 <b>^</b>	48131 <b>^</b> 48511 <b>^</b>						45439
3/0	48134	48131	48134 <b>^</b> 48806 <b>^</b>	48131 <b>^</b> 48511 <b>^</b>						45442
4/0	300430		300430 <b>^</b> 48807 <b>^</b>	48131 <b>^</b> 48511 <b>^</b>						45445
250-300 MCM						48816	69911			
300-350 MCM						48817	69912			
400 MCM						48818	69913			
500-600 MCM						48819	69914			

<sup>^</sup> Flag Terminals

Figure 2



# **B.** Hand Tools

Wire Size	HAND TOOLS				
26-22	69363†				
22-18					
22-16	49935 <b>†</b>				
16-14	49935 <b>†</b>				
14-12	49592 <b>†</b>				
12-10	49935 <b>†</b>				
12-10 16-14 H.D.	49965 <b>†</b>				
10-14 H.D.	(Flag Only)				
	69339●				
8	(Str. Wire)				
	69355●				
6	59083●				
0	(No Ratchet)				
4					
2					
1/0					

†Long Handle, ●Heavy Head Figure 3

# C. Pneumatic and Tape

		PNE	TAPE				
Wire Size	Heads for 626	Heads for 69015			Dies for 69875 •Reversed ••Standard	Dies for 68250-1	
26-22					68108-1		
22-18	314516-1 679301-1						
22-16	314516-1 679301-1			47812	68240-1 <b>-</b> 68096-1 <b></b>		
16-14	314517-1 679301-1			47813	68241-1 <b>-</b> 68097-1 <b></b>		
14-12	314518-1 679301-1				90566-1		
12-10 16-14 H.D.	679301-1			47814†	68242-1 <b>-</b> 68338-1 <b></b>	-	
8	1338757-1	49956 48412●	68135		68243-1◊	68312-1◊	
6	1338758-1	48172 48413●	68136			68313-1◊	
4		48173					
2		48174 48415●					
1/0		48183					


Flag Terminals, † Str. Wire Only, ◊ Single Indent

Figure 4

Rev **H** 2 of 5



### 2. AMPOWER\* TERMINALS AND SPLICES

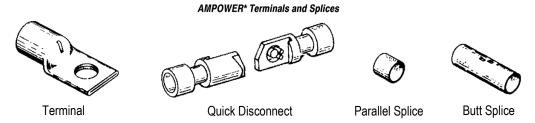

Pressure Type Wire Connector Chart (Use Type "C" Tooling)

WIRE SIZE RANGE

UL 424C LISTED

6 thru 1000 MCM
Stranded

6 thru 1000 MCM
Stranded

6 thru 1000 MCM
Stranded

Figure 5

### 2.1. Tool and Die Selections

### A. Hydraulic (Use Power Unit 69120-[] or 314979-1)

Wire Size	Dies for 69099 1752868-1	Dies for 69082 1752786-1	Dies for 69065 59973-1	Dies for 58445-1 1752788-1	Dies for 68073-2	
6	69133-1					
4	69134-2					
2	46765-3		46321-3			
	46766-2					
1/0	68361-1†		46322-2			
	(with Locator)					
	46767-2					
2/0	68253-1†		46323-2			
	(with Locator)					
	46749-2					
3/0	59867-1†		46324-2			
	(with Locator)					
	46750-2		46325-2			
4/0	68304-1†					
	(with Locator)					
250 MCM	46751-2			46326-2		
	68203-1†			40020-2		
300 MCM	46752-2					
350 MCM	46753-2	69653				
000 1010101	10100 2	68204-1†				
400 MCM		46754-2				
100 1010101		68332-1†				
500 MCM		46755-2				
		68206-1†				
600 MCM		46756-2				
600 H.D.		59870-1				
700 MCM		46757-2				
800 MCM		46758-2				
900 MCM		46759-2				
1000 MCM		46760-2				
1250 MCM					68114-1	
1500 MCM					68282-1	

<sup>†</sup>Quick Disconnect Terminals Only


Figure 6

Rev **H** 3 of 5



# **Tooling and Accessories**

### Hydraulic




DYNA-CRIMP\* Hydraulic Power Units 69120-1 (115 VAC - 60 Hz) 1804700-1 (115 VAC – 60 Hz) 69120-2 (230 VAC - 60 Hz) 1804700-2 (230 VAC - 60 Hz)

Handle Control w/Hose and Cord 59907-[] and 1901775-[]






59975-1



Hose Assy w/Crimping Head Coupling 59909-[], 1583662-[]

directional Valve 59220 (No Safety Sw) 59220-2 (w/Safety Sw)










Hand Tool 59973-1

### Tape Machines






314979-1 1583661-1



#### Pneumatic

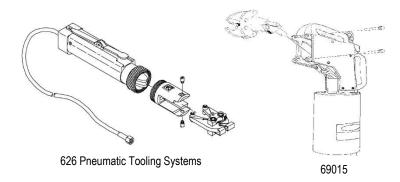




Figure 7

4 of 5 Rev H



# **Tooling and Accessories**

### Hydraulic Crimping Heads

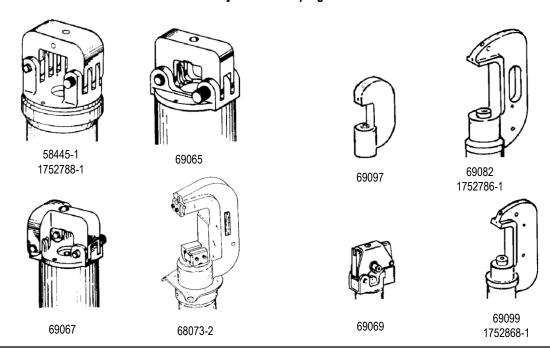


Figure 8

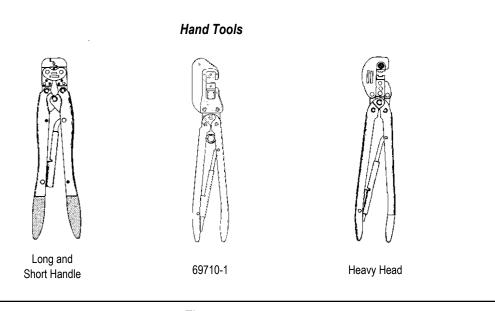


Figure 9

### 3. REVISION SUMMARY

- All paragraphs revised due to formatting adjustments and editing.
- Corrections to Figure 6 were made, as follows: added line item for 350 MCM and corrected line item for 400 MCM to match previous revision.

Rev **H** 5 of 5

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: