


- ⚠ DOUBLE BAR POLARIZATION
- ⚠ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- ⚠ POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, .000030 MIN TOTAL ON THE MATING SURFACES, .000100 MIN TIN-LEAD PLATE ON THE SOLDER-TAILS, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
-OR-
.000030 MIN GOLD PLATE ON THE MATING SURFACES, .000100 MIN TIN-LEAD PLATE ON THE SOLDER-TAILS, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- ⚠ CENTER POLARIZATION SLOT
- ⚠ FOR 10 POSN ASSEMBLY, SLOT OMITTED WHERE INDICATED
- ⚠ OPTIONAL AMP IDENTIFICATION NUMBER (DATE CODE). LOCATION APPROXIMATELY WHERE SHOWN.
- ⚠ PACKAGED IN GANG OF TUBES.
- ⚠ NUMBER 1 POSITION.

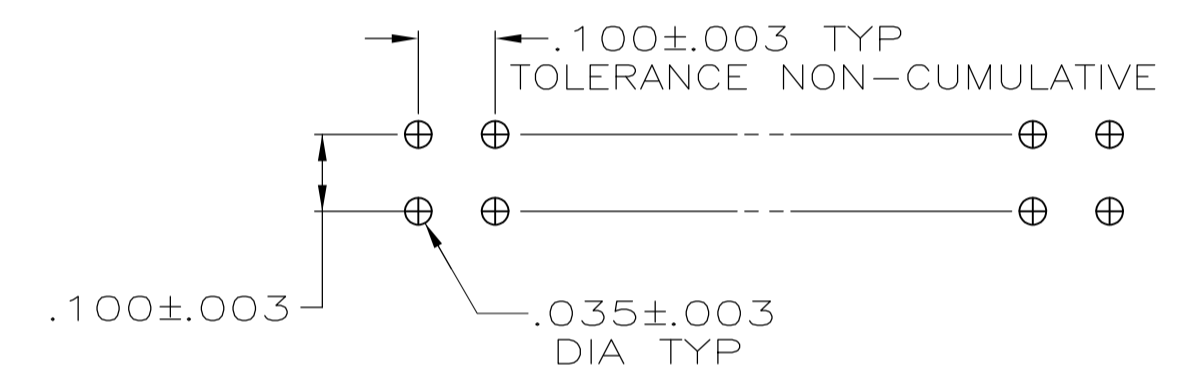

⚠ OBSOLETE	2.800	2.400	24	50	1-103309-8
⚠ OBSOLETE	1.500	1.100	11	24	1-103309-7
⚠ OBSOLETE	1.600	1.200	12	26	1-103309-4
⚠ OBSOLETE	1.300	.900	9	20	1-103309-3
⚠ OBSOLETE	3.300	2.900	29	60	1-103309-2
⚠ OBSOLETE	3.100	2.700	27	56	1-103309-1
⚠ OBSOLETE	2.800	2.400	24	50	1-103309-0
⚠ OBSOLETE	2.500	2.100	21	44	103309-9
⚠ OBSOLETE	2.300	1.900	19	40	103309-8
⚠ OBSOLETE	2.000	1.600	16	34	103309-7
⚠ OBSOLETE	1.600	1.200	12	26	103309-6
⚠ OBSOLETE	1.300	.900	9	20	103309-5
⚠ OBSOLETE	1.200	.800	8	18	103309-4
⚠ OBSOLETE	1.100	.700	7	16	103309-3
⚠ OBSOLETE	1.000	.600	6	14	103309-2
⚠ OBSOLETE	.800	.400	4	10	103309-1
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± .005
1 PLC	± .004
2 PLC	± .003
3 PLC	± .002
4 PLC	± .001
ANGLES	± .005

MATERIAL: HOUSING: GLASS FILLED NYLON OR PET; BLACK; UL 94V-0 RATED; POSTS: BRASS

FINISH: ⚠

APPROVED: R. FEIDT 9-03-87

NAME: HEADER ASSY, LOW PROFILE, AMP-LATCH

PRODUCT SPEC: 108-40018

APPLICATION SPEC: -

SIZE: A1

WEIGHT: -

CUSTOMER DRAWING

SCALE: 4:1

SHEET: 1 OF 1

REV: N1

STE TE Connectivity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103309-8](#)