
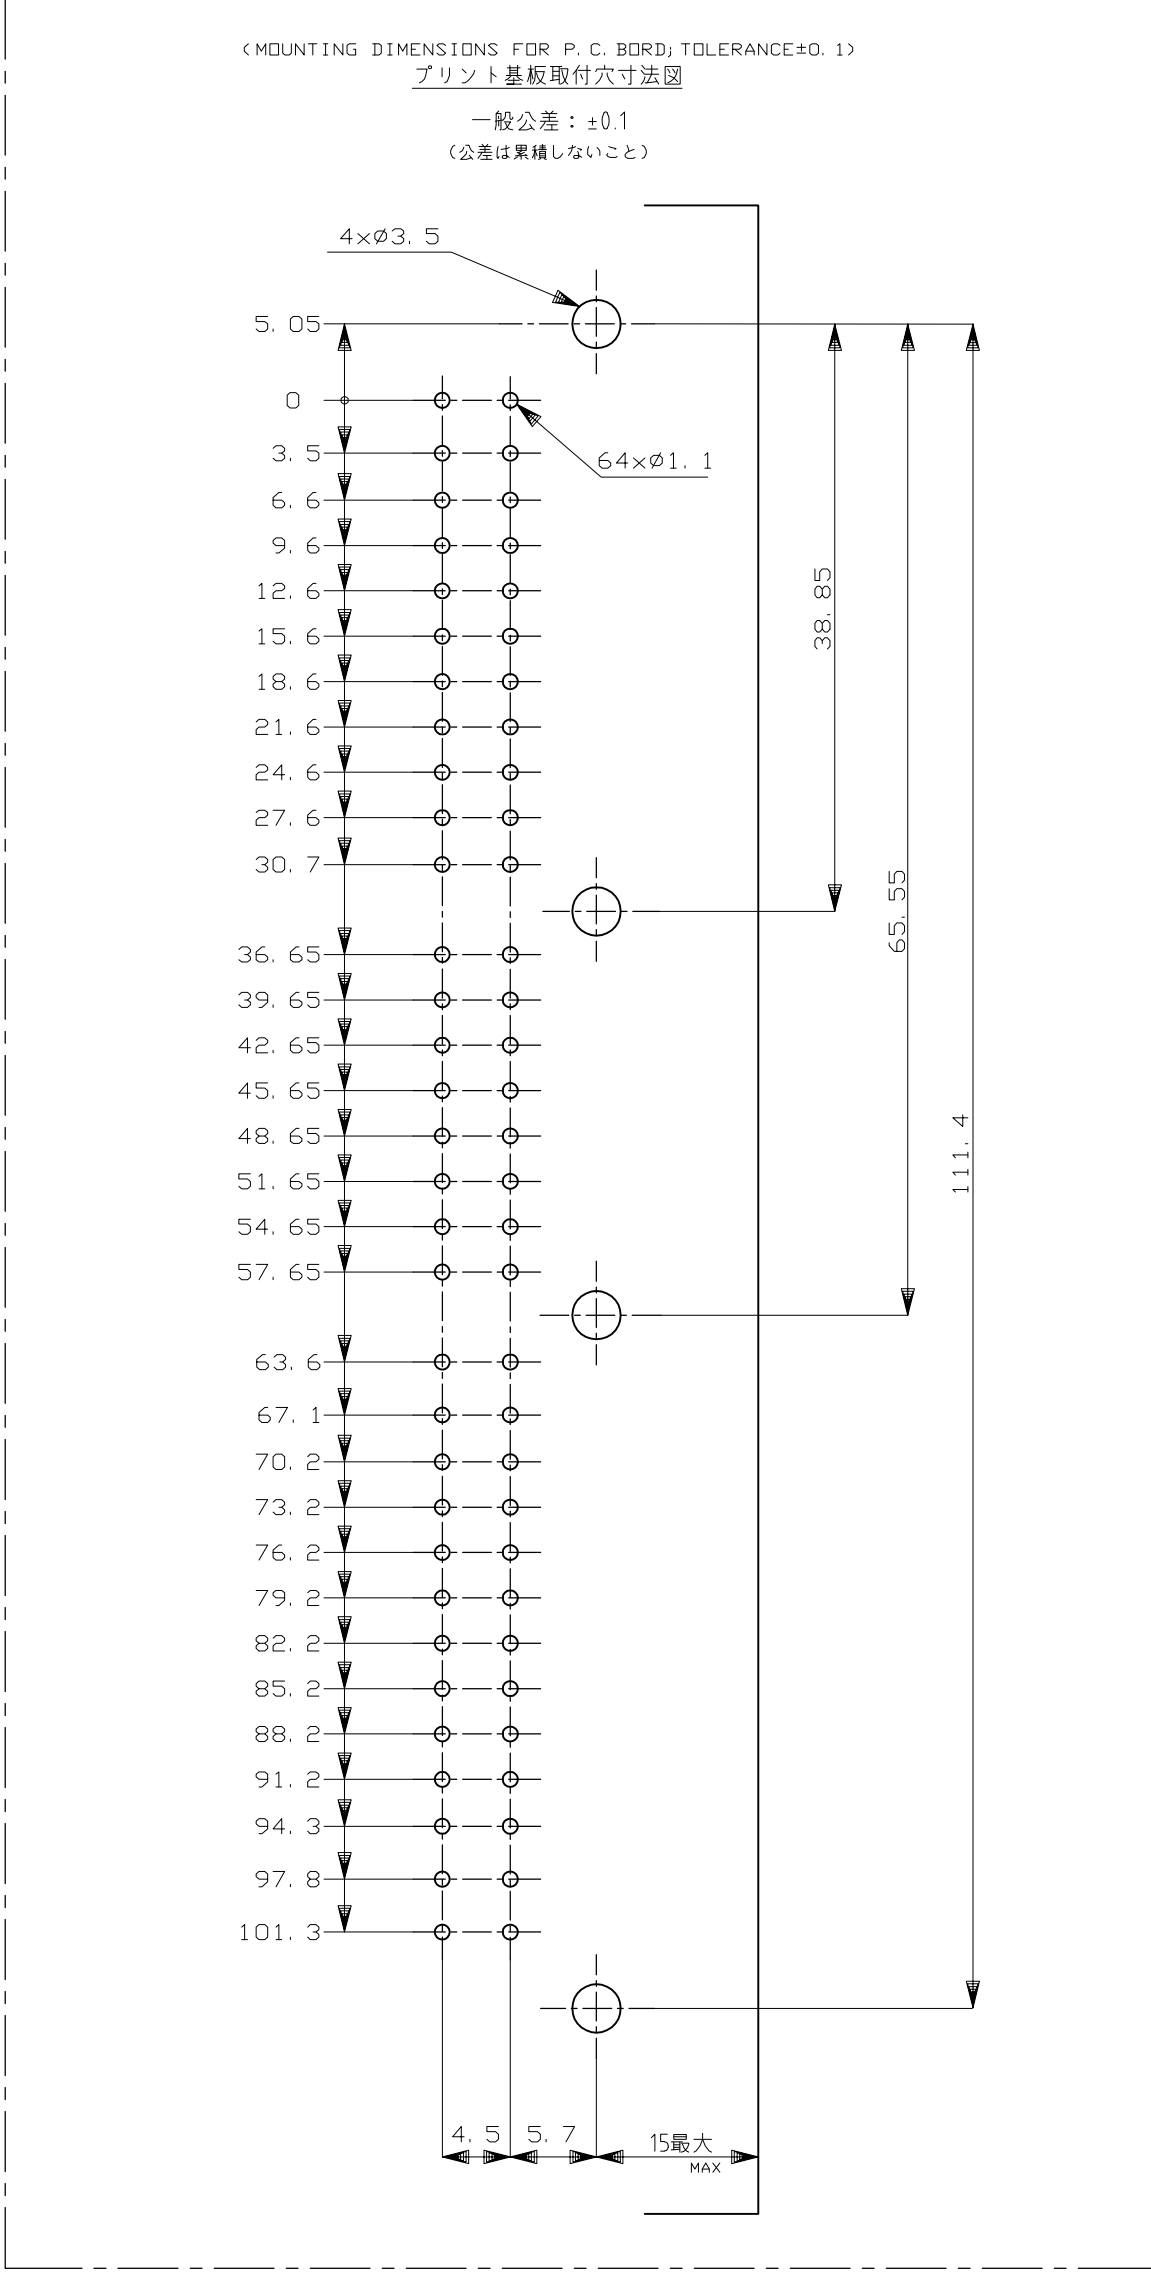
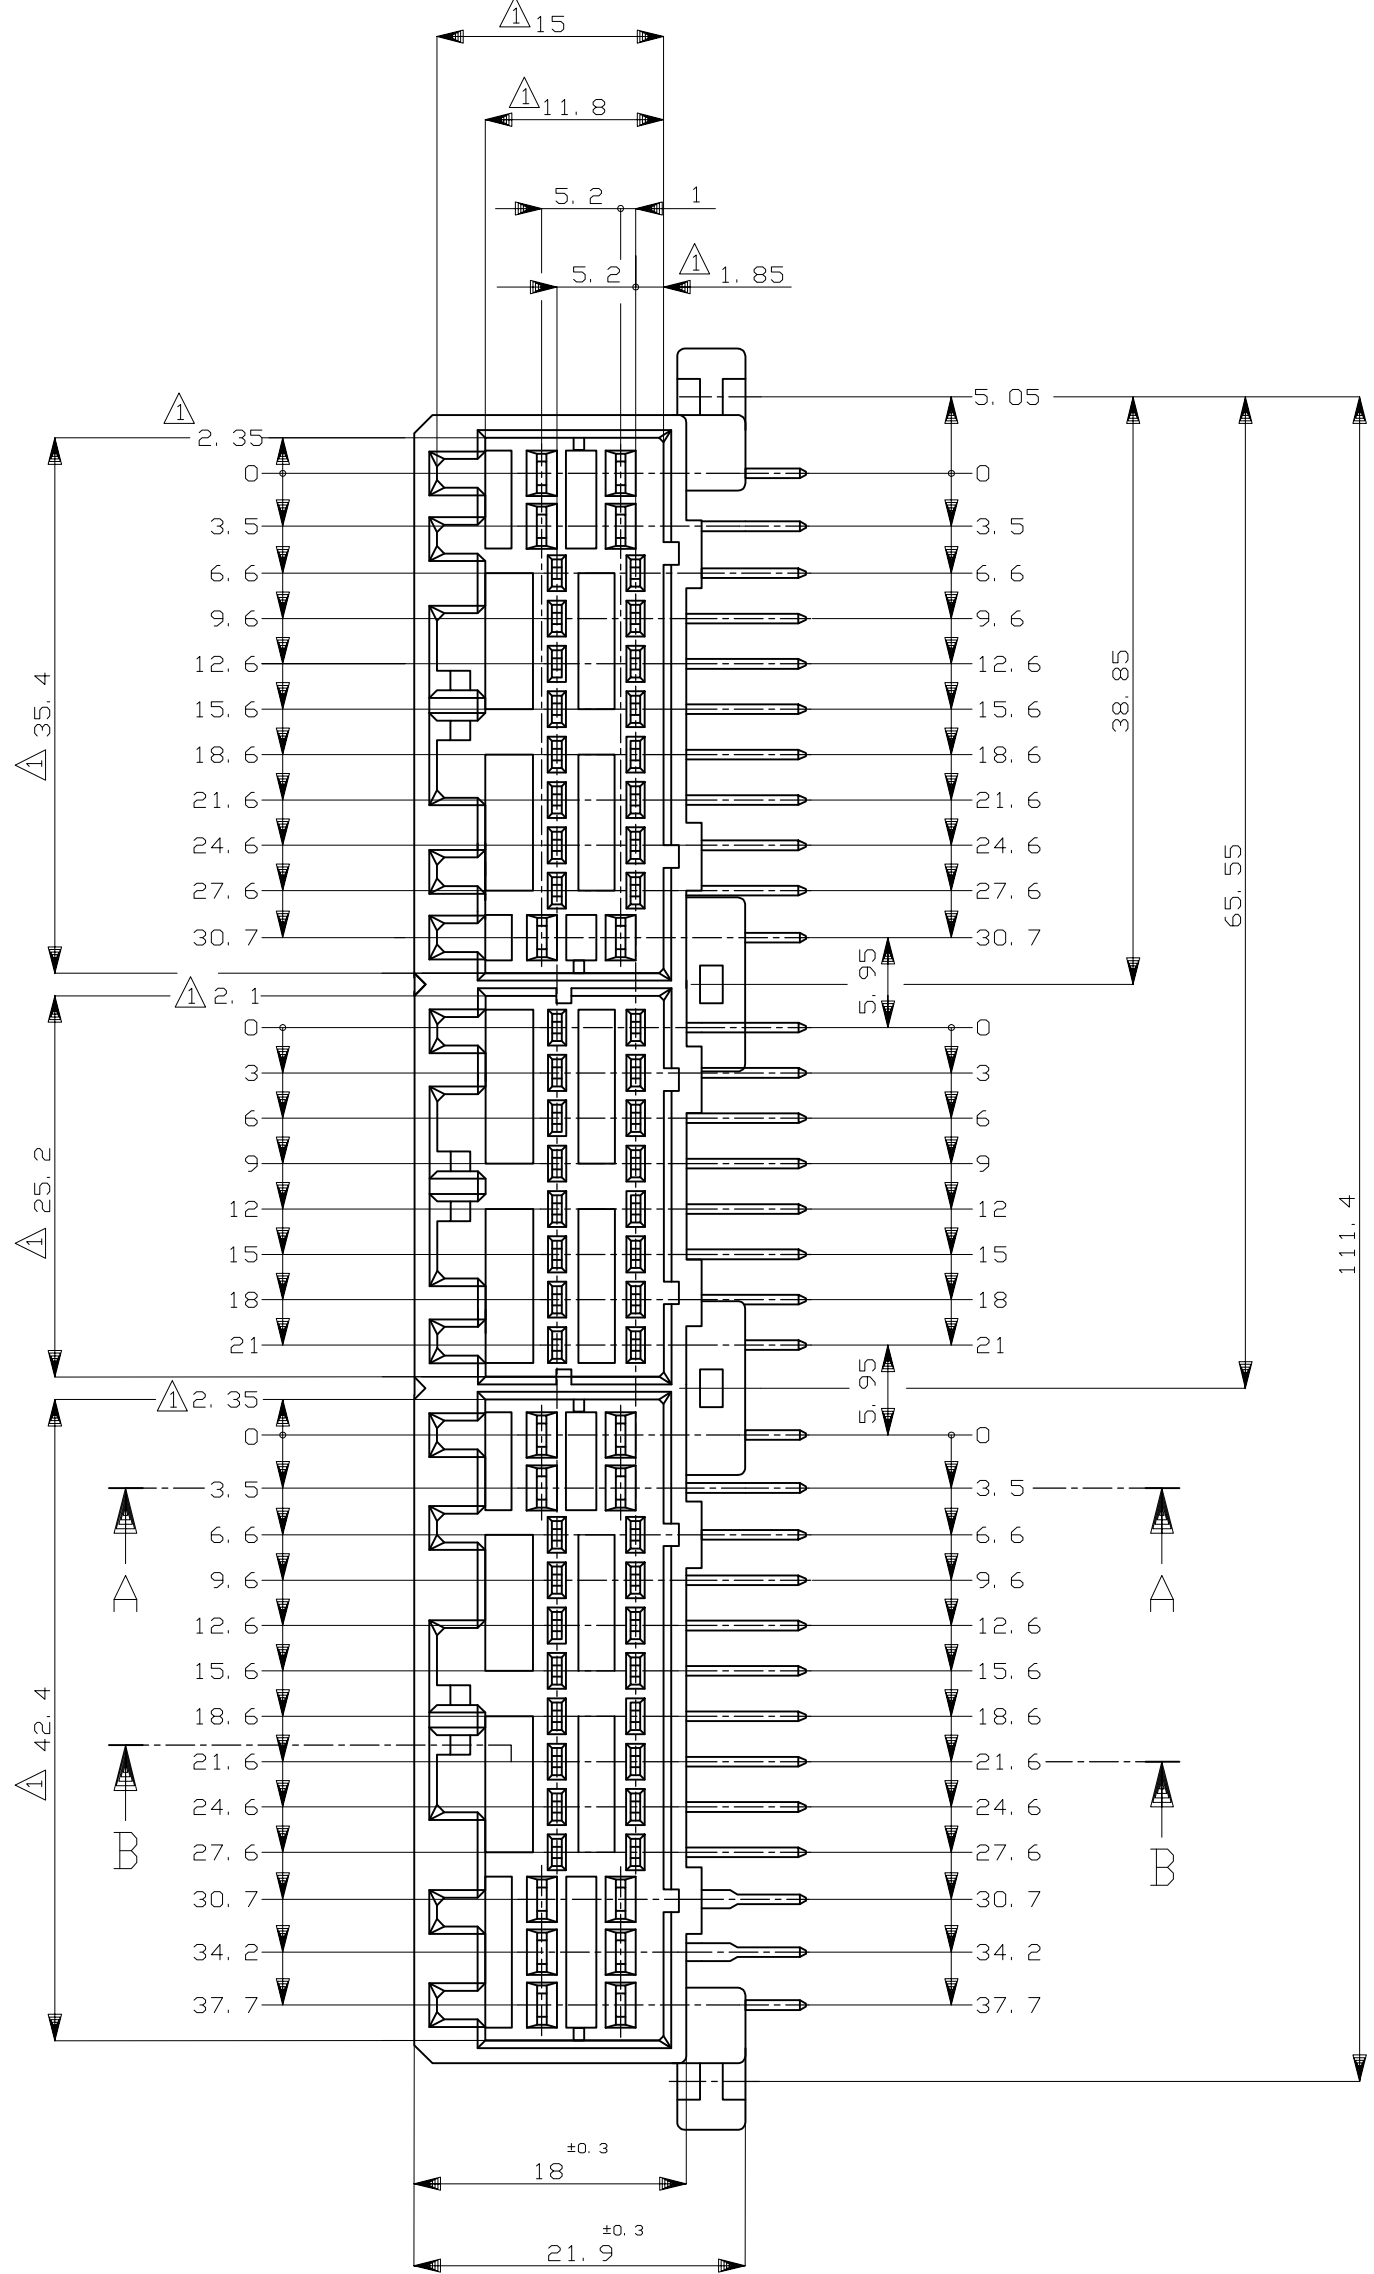
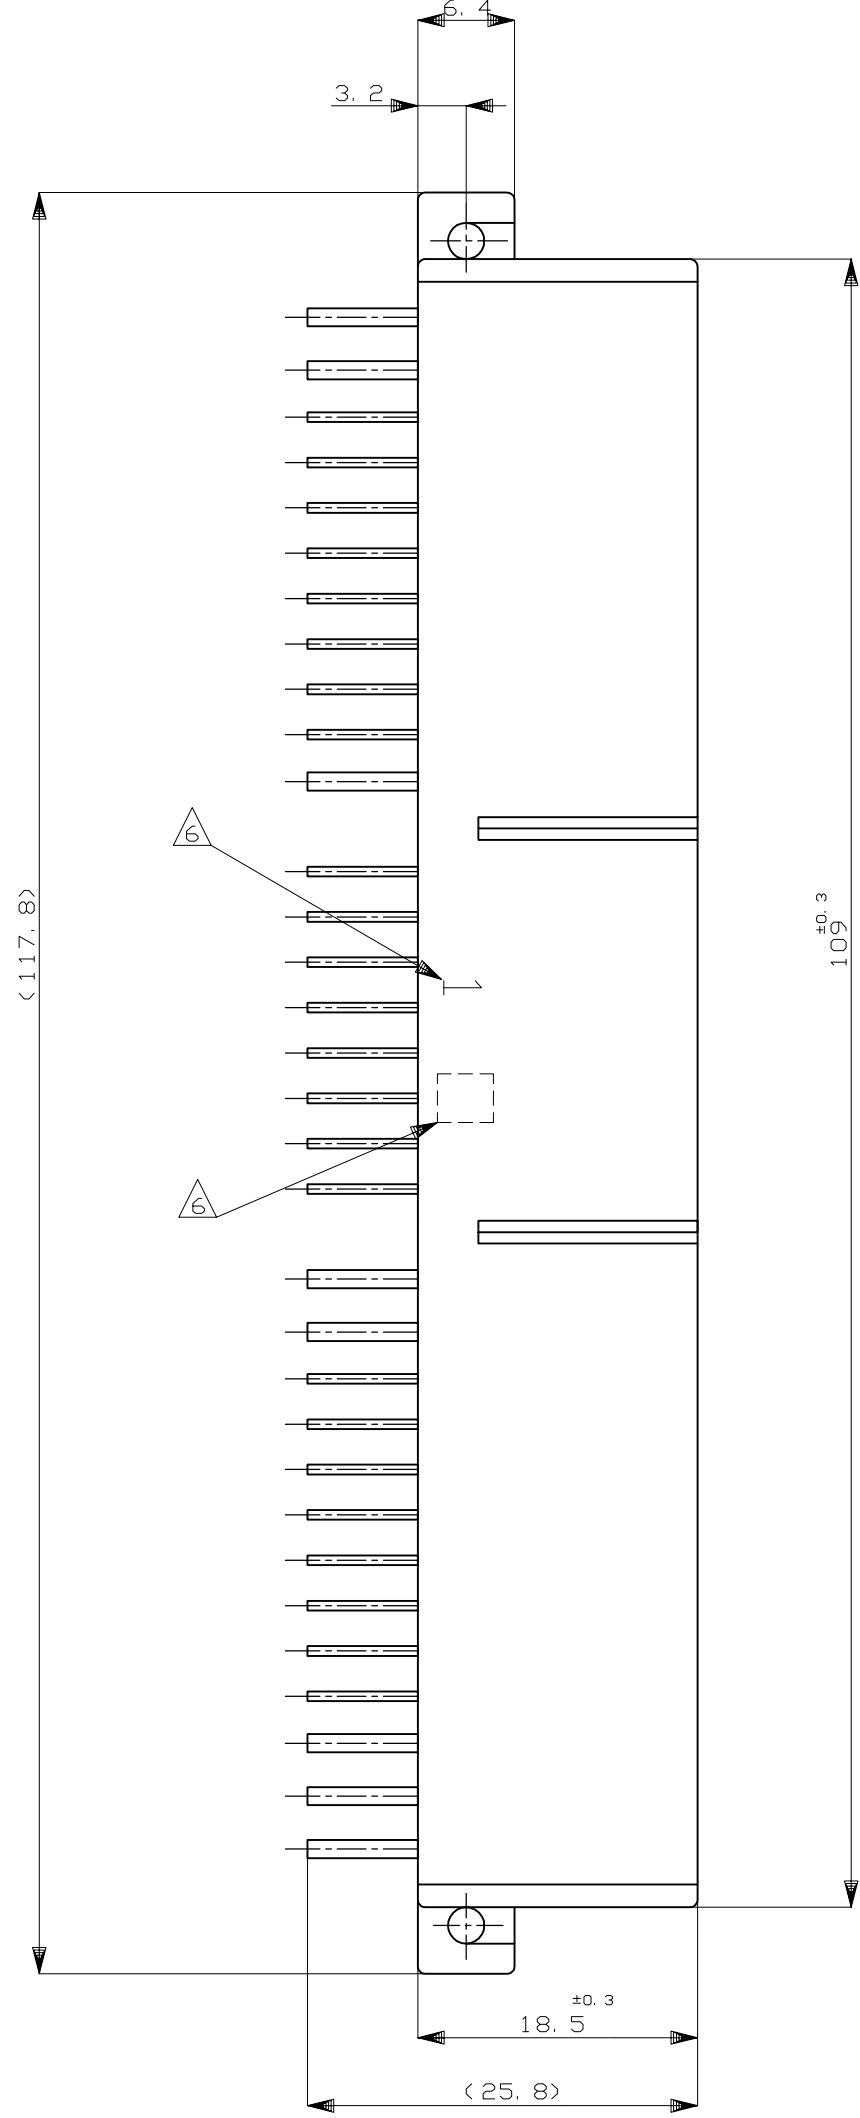


D

C

B


A

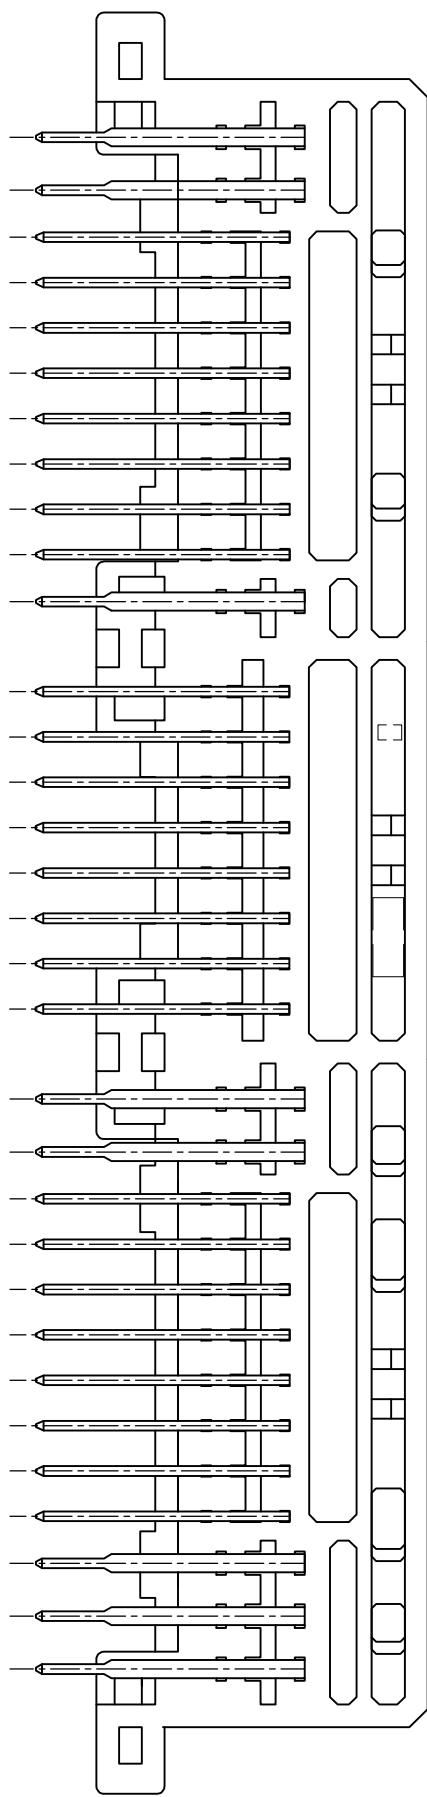

- △X 面から2mmの範囲で測定
2. 嵌合相手ハウジング型 174516, 174515, 174514, 917992, 917989, 917981
3. 推奨取付ねじ: JIS B1115, B1112 タッピンねじ, なべ2種
呼び径3, 長さ6mm以下 (締付けトルク: 0.4N-m (4kg-cm) 以下)
4. 適用製品規格番号: 108-5280, 108-5342

△回路番号:

パワー回路 ①～⑩
シグナル回路 ⑪～⑥④

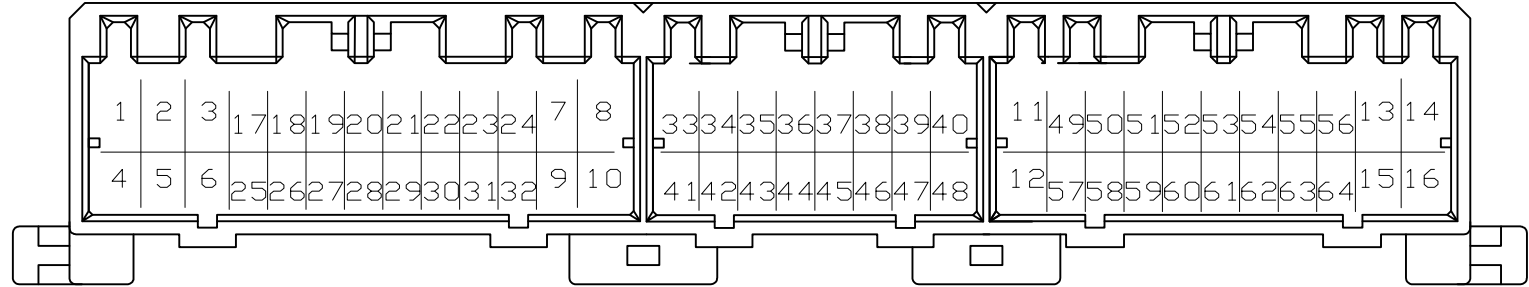


△適用製品型番のプリフィックス及びIDマークを
カラーホットマークにて表示

1. MUST BE KEPT BETWEEN X AND 2
2. THE MATING PLUG HSG PART NUMBER: 174516, 174515, 174514, 917992, 917989, 917981
3. RECOMMENDED MOUNTING SCREW: 3mm DIA, 6mm LENGTH (MAX.)
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
(TIGHTENING TORQUE: 0.4N-m (4kg-cm) MAX.)
4. APPLICABLE PRODUCT SPEC NO.: 108-5280, 108-5342


△CIRCUIT NUMBER

POWER CIRCUIT NO. ①～⑩
SIGNAL CIRCUIT NO. ⑪～⑥④

△INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY COLOR HOT MARK

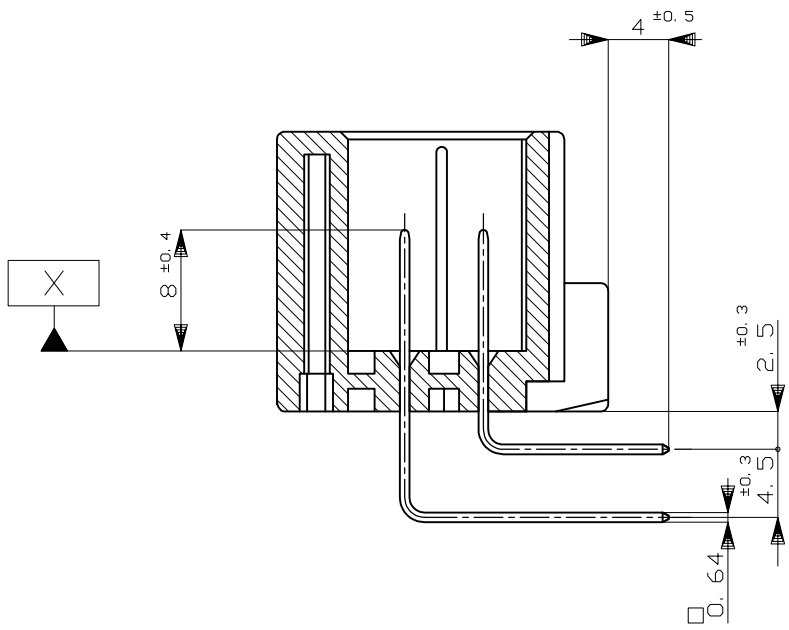


A-A

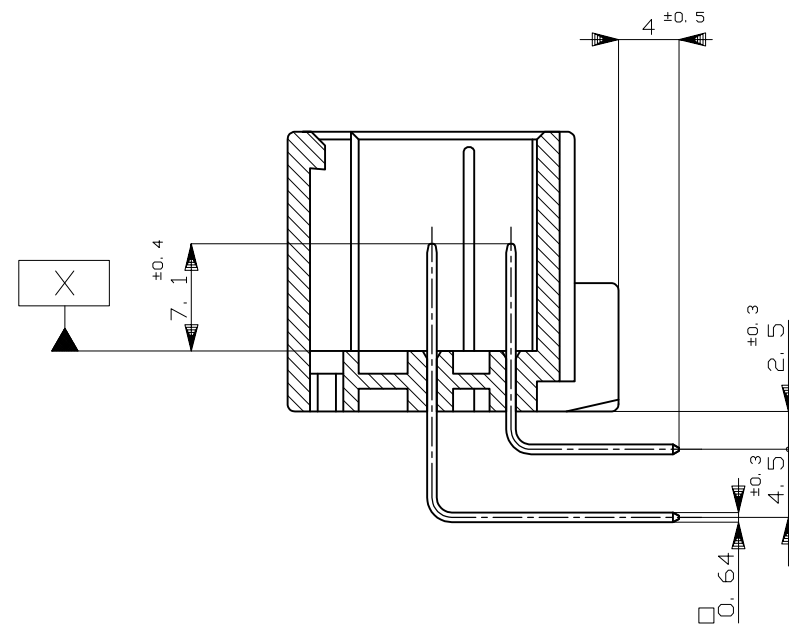

B-B

OBSOLETE	59	SELECTIVE-TIN (MATT)	SELECTIVE GOLD × 8	-	49~56	GRAY 灰色	9-5174518-6
			PRE-TIN × 56				
	51	SELECTIVE-TIN (MATT)	SELECTIVE GOLD × 64	1~16	17~64	GRAY 灰色	1-5174518-6
			PRE-TIN × 16				
	52	SELECTIVE-TIN (MATT)	SELECTIVE GOLD × 48	-	17~64	YELLOW 黄色	2-5174518-7
			PRE-TIN × 8				
	59	SELECTIVE-TIN (MATT)	SELECTIVE GOLD × 8	-	49~56	YELLOW 黄色	9-5174518-7
			PRE-TIN × 56				
	56	SELECTIVE-TIN (MATT)	SELECTIVE GOLD × 9	14, 16	57~63	NATURAL 自然色	6-5174518-1
			SELECTIVE-TIN (BRIGHT) × 55				
	9	TIN-LEAD	SELECTIVE GOLD × 8	-	49~56	GRAY 灰色	9-174518-7
			PRE-TIN × 56				
	9	TIN-LEAD	SELECTIVE GOLD × 12	-	33, 34, 36~38, 40, 43, 56, 59~56	YELLOW 黄色	8-174518-7
			PRE-TIN × 52				
	7	TIN-LEAD	SELECTIVE GOLD × 16	-	33~40, 49~56	YELLOW 黄色	7-174518-7
			PRE-TIN × 48				
	6	TIN-LEAD	SELECTIVE GOLD × 9	14, 16	57~63	NATURAL 自然色	6-174518-1
			PRE-TIN × 55				
	5	TIN-LEAD	SELECTIVE GOLD × 24	-	17~24, 33~40, 49~56	YELLOW 黄色	5-174518-7
			PRE-TIN × 40				
	4	TIN-LEAD	SELECTIVE GOLD × 22	-	23, 24, 31~48, 52, 57	YELLOW 黄色	4-174518-7
			PRE-TIN × 42				
	3	TIN-LEAD	SELECTIVE GOLD × 52	7~10	17~64	YELLOW 黄色	3-174518-7
			PRE-TIN × 12				
	3	TIN-LEAD	SELECTIVE GOLD × 52	7~10	17~64	GRAY 灰色	3-174518-6
			PRE-TIN × 12				
	2	TIN-LEAD	SELECTIVE GOLD × 48	-	17~64	YELLOW 黄色	2-174518-7
			PRE-TIN × 16				
	2	TIN-LEAD	SELECTIVE GOLD × 48	-	17~64	GRAY 灰色	2-174518-6
			PRE-TIN × 16				
	2	TIN-LEAD	SELECTIVE GOLD × 48	-	17~64	NATURAL 自然色	2-174518-1
			PRE-TIN × 16				
	1	TIN-LEAD	SELECTIVE GOLD × 64	1~16	17~64	GRAY 灰色	1-174518-7
			PRE-TIN × 64				
	1	TIN-LEAD	SELECTIVE GOLD × 64	1~16	17~64	GRAY 灰色	1-174518-6
			PRE-TIN × 64				
OBSOLETE	0		PRE-TIN × 64	-	-	YELLOW 黄色	174518-7
			PRE-TIN × 64				
OBSOLETE	0		PRE-TIN × 64	-	-	GRAY 灰色	174518-6
			PRE-TIN × 64				
△MARKING マーキング		SOLDERING SIDE 半田付け面	CONTACT SIDE 接触面	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	COLOR 色	PART NUMBER 製品番号
		CONTACT FINISH コンタクト仕上		GOLD PLATED CIRCUIT NO. 金めっき回路番号			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. SHINOHARA 12FEB08	 TE Connectivity																		
		CHK K. BETSUI 12FEB08																			
DIMENSIONS: 単位: 寸 mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 <table><tr><td>0 PLC</td><td>±</td><td>-</td></tr><tr><td>1 PLC</td><td>±</td><td>-</td></tr><tr><td>2 PLC</td><td>±</td><td>-</td></tr><tr><td>3 PLC</td><td>±</td><td>-</td></tr><tr><td>4 PLC</td><td>±</td><td>-</td></tr><tr><td>ANGLES</td><td>±</td><td>-</td></tr></table>	0 PLC	±	-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-	APVD K. BETSUI 12FEB08	NAME 名称 64POSITION CAP HOUSING ASSEMBLY 040/070 SERIES HYBRID I/O CONNECTOR
		0 PLC	±	-																	
		1 PLC	±	-																	
		2 PLC	±	-																	
3 PLC	±	-																			
4 PLC	±	-																			
ANGLES	±	-																			
PRODUCT SPEC 製品規格 E NOTE 4																					
APPLICATION SPEC 取付通用品規格																					
MATERIAL 材料 HOUSING : PBT CONTACT : BRASS	FINISH 仕上 -	WEIGHT 重量 29.9 g	SIZE 寸法 A1	CAGE CODE 規格 00779	DRAWING NO 図番 174518	RESTRICTED TO															
		CUSTOMER DRAWING		SCALE 尺度 2:1	SHEET 枚数 1 OF 1	REV 改訂 H6															

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-174518-6](#)