

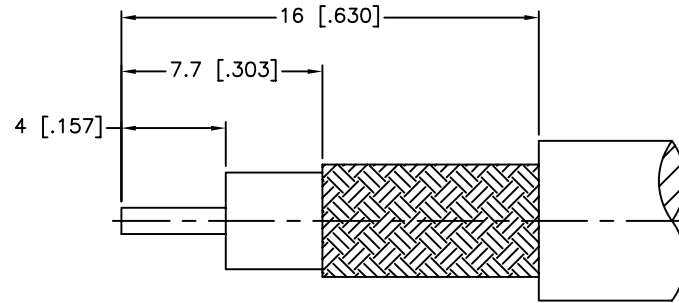
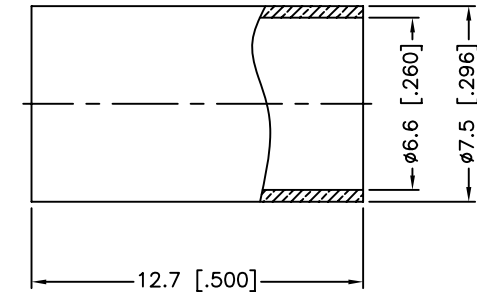


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/30/10	XXXXXX	INITIAL RELEASE

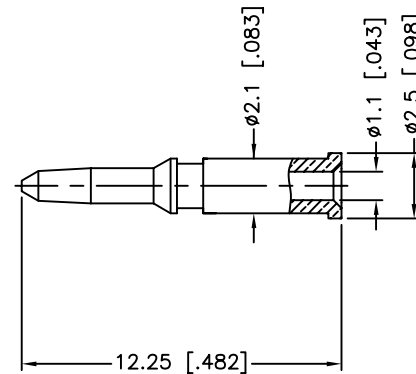

RECOMMENDED
CABLE STRIPPING DIM'S

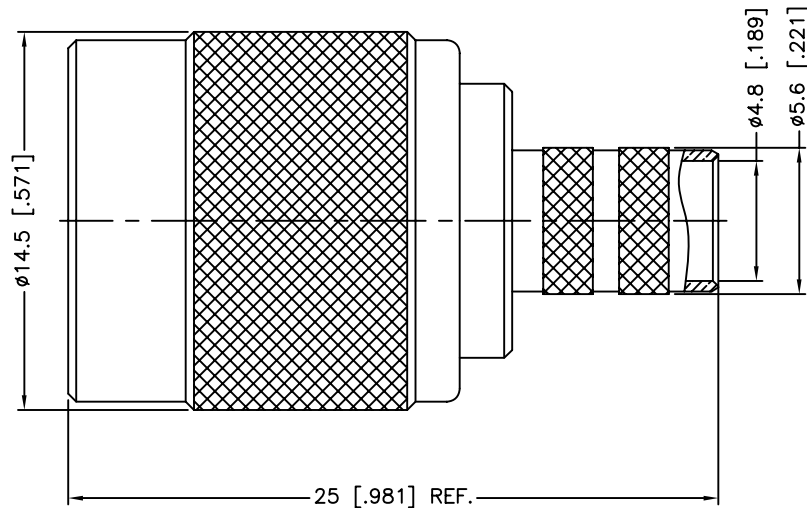

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

9	FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
8	CONTACT PIN	BRASS	GOLD	1		DRAWN	M.ZHANG						03/30/10
7	WASHER	BRASS	NICKEL	1		CHECKED							
6	RING	DELIRIN	NATURAL	1		ISSUED			PART DESCRIPTION TNC CRIMP PLUG (FOR BELDEN 1695A CABLE)				
5	RETAINER RING	BRASS	NICKEL	1		SHEET	1 OF 1						
4	GASKET	RUBBER	RED	1					PART NO. 122493				
3	INSULATOR	DELIRIN	NATURAL	1									
2	BODY	BRASS	NICKEL	1				DWG. NO. 122493.DWG					
1	SHELL	BRASS	NICKEL	1									
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE C:/CONNEX/122493.DWG			REV.	NC	SIZE	A	SCALE	NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122493](#)