

Bus system cable - SAC-5P- 5,0-923/MINFS DN - 1418439

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus system cable, DeviceNet™, 5-position, PUR halogen-free, gray RAL 7001, shielded, free cable end, on Socket straight 7/8"-16UNF, Cable length: 5 m



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	222.22 g
Custom tariff number	85444290
Country of origin	Germany

Technical data

Environmental Product Compliance

REACH SVHC	DOT 15571-58-1
------------	----------------

Dimensions

Length of cable	5 m
Stripping length of the free conductor end	50 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C (Plug / socket)
Degree of protection	IP65
	IP67

General

Rated current at 40°C	5.2 A
Rated voltage	30 V
Number of positions	5
Coding	A - standard
Signal type/category	DeviceNet™

Bus system cable - SAC-5P- 5,0-923/MINFS DN - 1418439

Technical data

General

Status display	No
Overvoltage category	II
Degree of pollution	3
Torque	0.8 Nm (7/8" connectors)

Material

Flammability rating according to UL 94	HB
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Material of grip body	TPU
Material, knurls	Stainless steel
Sealing material	TPU

Pin assignment

Position = wire color (signal) = position (optional)	1 (Socket) = SR (shield)
	2 (Socket) = RD (V+)
	3 (Socket) = BK (V-)
	4 (Socket) = WH (CAN_H)
	5 (Socket) = BU (CAN_L)

Standards and Regulations

Flammability rating according to UL 94	HB
--	----

Cable

Cable type	CAN Bus/DeviceNet drop cable
Cable type (abbreviation)	923
UL AWM style	21198 (80°C/300 V)
Cable structure	2xAWG24/19+2xAWG22/19
Conductor cross section	2x 0.25 mm² (Data cable)
	2x 0.34 mm² (Power supply)
	1x 0.34 mm² (Drain wire)
AWG signal line	24
AWG power supply	22
Conductor structure signal line	19x 0.13 mm
Conductor structure, voltage supply	19x 0.15 mm
Core diameter including insulation	1.95 mm ±0.05 mm (Data cable)
	1.4 mm ±0.05 mm (Power supply)
Wire colors	Red-black, blue-white

Bus system cable - SAC-5P- 5,0-923/MINFS DN - 1418439

Technical data

Cable

Twisted pairs	2 cores to the pair
Type of pair shielding	Plastic-coated aluminum foil, aluminum side outside
Overall twist	2 pairs around a drain wire in the center to the core
Shielding	Tinned copper braided shield
Optical shield covering	80 %
External sheath, color	Silver-gray RAL 7001
External cable diameter D	6.7 mm $\pm$ 0,3 mm
Minimum bending radius, flexible installation	10 x D
Number of bending cycles	5000000
Bending radius	70 mm
Traversing path	4.5 m
Traversing rate	3 m/s
Acceleration	3 m/s ²
Outer sheath, material	PUR
Material conductor insulation	Foamed PE (Data cable)
	PE (Power supply)
Conductor material	Tin-plated Cu litz wires
Insulation resistance	$\geq 5 \text{ G}\Omega\cdot\text{km}$ (Data cable)
	$\geq 5 \text{ G}\Omega\cdot\text{km}$ (Power supply)
Loop resistance	$\leq 181.8 \text{ }\Omega$ (Data cable)
	$\leq 114.8 \text{ }\Omega$ (Power supply)
Working capacitance	nom. 40 nF (Data cable)
Wave impedance	120 $\Omega \pm 12 \text{ }\Omega$ (f = 1 MHz)
Shield attenuation	$\leq 0.95 \text{ dB}$ (f = 125 kHz)
	$\leq 1.64 \text{ dB}$ (f = 500 kHz)
	$\leq 2.29 \text{ dB}$ (f = 1 MHz)
Nominal voltage, cable	$\leq 300 \text{ V}$ (Peak value, not for high-power applications)
Test voltage Core/Core	2000 V (50 Hz, 1 min.)
Test voltage Core/Shield	2000 V (50 Hz, 1 min.)
Flame resistance	UL 1581, Sec. 1060 (FT-1)
	IEC 60332-1
Other resistance	Low adhesion
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
	-20 °C ... 70 °C (cable, flexible installation)

Bus system cable - SAC-5P- 5,0-923/MINFS DN - 1418439

Classifications

eCl@ss

eCl@ss 4.0	27060307
eCl@ss 4.1	27060307
eCl@ss 5.0	27061801
eCl@ss 5.1	27060307
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27279218
eCl@ss 9.0	27060311

ETIM

ETIM 2.0	EC000830
ETIM 3.0	EC000830
ETIM 4.0	EC001855
ETIM 5.0	EC001855

UNSPSC

UNSPSC 6.01	26121616
UNSPSC 7.0901	26121616
UNSPSC 11	26121604
UNSPSC 12.01	26121616
UNSPSC 13.2	26121616

Approvals

Approvals

Approvals

UL Listed / cUL Listed / EAC / cULus Listed

Ex Approvals

Approvals submitted

Approval details

Bus system cable - SAC-5P- 5,0-923/MINFS DN - 1418439

Approvals

UL Listed 	
Nominal current IN	4 A
Nominal voltage UN	300 V


cUL Listed 	
Nominal current IN	4 A
Nominal voltage UN	300 V

EAC

cULus Listed 
--


Drawings

Schematic diagram



Pin assignment, socket, 7/8"-16UNF, 5-pos., view of female side


Cable cross section



CAN Bus/DeviceNet [923]


Bus system cable - SAC-5P- 5,0-923/MINFS DN - 1418439

Dimensional drawing

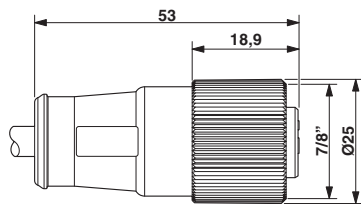

7/8"-16UNF socket, straight

Circuit diagram

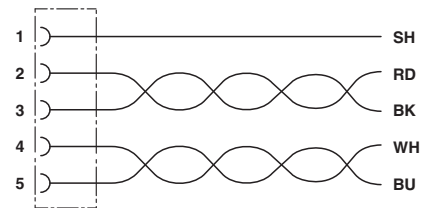

Contact assignment of 7/8" socket

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1418439](#)