

## Base strip - GMSTB 2,5/11-GF-7,62 - 1806313

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


Header, Nominal current: 12 A, Rated voltage (III/2): 630 V, Number of positions: 11, Pitch: 7.62 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering



The figure shows a 10-position version of the product

### Product Features

- Versions with threaded flange and 7.62 mm pitch
- Plug-in direction parallel to the PCB
- Headers with angled solder pins for 630 V applications (III/2)



### Key Commercial Data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Weight per Piece (excluding packing) | 8.13 g   |
| Custom tariff number                 | 85366990 |
| Country of origin                    | Germany  |

### Technical data

#### Dimensions

|                          |          |
|--------------------------|----------|
| Length                   | 12 mm    |
| Pitch                    | 7.62 mm  |
| Dimension a              | 76.2 mm  |
| Constructional height    | 9 mm     |
| Length of the solder pin | 3.5 mm   |
| Pin dimensions           | 1 x 1 mm |
| Hole diameter            | 1.4 mm   |

#### General

## Base strip - GMSTB 2,5/11-GF-7,62 - 1806313

### Technical data

#### General

|                                        |                 |
|----------------------------------------|-----------------|
| Range of articles                      | GMSTB 2,5/..-GF |
| Insulating material group              | I               |
| Rated surge voltage (III/3)            | 6 kV            |
| Rated surge voltage (III/2)            | 6 kV            |
| Rated surge voltage (II/2)             | 6 kV            |
| Rated voltage (III/3)                  | 400 V           |
| Rated voltage (III/2)                  | 630 V           |
| Rated voltage (II/2)                   | 630 V           |
| Connection in acc. with standard       | EN-VDE          |
| Nominal current $I_N$                  | 12 A            |
| Maximum load current                   | 12 A            |
| Insulating material                    | PA              |
| Flammability rating according to UL 94 | V0              |
| Color                                  | green           |
| Number of positions                    | 11              |

#### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CSA    |
| Flammability rating according to UL 94 | V0     |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |

## Base strip - GMSTB 2,5/11-GF-7,62 - 1806313

### Classifications

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

### Approvals

#### Approvals

#### Approvals

CSA / UL Recognized / VDE Gutachten mit Fertigungsüberwachung / cUL Recognized / IECCE CB Scheme / EAC / EAC / cULus Recognized

#### Ex Approvals

#### Approvals submitted

### Approval details

|                                                                                         |       |       |
|-----------------------------------------------------------------------------------------|-------|-------|
| CSA  |       |       |
|                                                                                         | B     | D     |
| Nominal current I <sub>N</sub>                                                          | 10 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                          | 300 V | 300 V |

|                                                                                                   |       |       |
|---------------------------------------------------------------------------------------------------|-------|-------|
| UL Recognized  |       |       |
|                                                                                                   | B     | D     |
| Nominal current I <sub>N</sub>                                                                    | 15 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                                    | 300 V | 300 V |

## Base strip - GMSTB 2,5/11-GF-7,62 - 1806313

### Approvals

|                                                                                                                           |       |
|---------------------------------------------------------------------------------------------------------------------------|-------|
| VDE Gutachten mit Fertigungsüberwachung  |       |
| Nominal current I <sub>N</sub>                                                                                            | 12 A  |
| Nominal voltage U <sub>N</sub>                                                                                            | 400 V |

|                                                                                                  |       |       |
|--------------------------------------------------------------------------------------------------|-------|-------|
| cUL Recognized  |       |       |
|                                                                                                  | B     | D     |
| Nominal current I <sub>N</sub>                                                                   | 15 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                                   | 300 V | 300 V |

|                                                                                                    |       |
|----------------------------------------------------------------------------------------------------|-------|
| IECEE CB Scheme  |       |
| Nominal current I <sub>N</sub>                                                                     | 12 A  |
| Nominal voltage U <sub>N</sub>                                                                     | 400 V |

|     |
|-----|
| EAC |
|-----|

|     |
|-----|
| EAC |
|-----|

|                                                                                                      |
|------------------------------------------------------------------------------------------------------|
| cULus Recognized  |
|------------------------------------------------------------------------------------------------------|

### Accessories

Accessories

Coding element

## Base strip - GMSTB 2,5/11-GF-7,62 - 1806313

### Accessories

Coding star - CR-MSTB - 1734401



Coding section, inserted into the recess in the header or the inverted plug, red insulating material

---

### Filler plug

Accessories - MSTB-BL - 1755477



Keying cap, for forming sections, plugs onto header pin, green insulating material

---

### Labeled terminal marker

Marker card - SK 7,62/3,8:FORTL.ZAHLEN - 0804549



Marker card, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 100, Mounting type: Adhesive, for terminal block width: 7.62 mm, Lettering field: 7.62 x 3.8 mm

---

### Additional products

Printed-circuit board connector - FRONT-GMSTB 2,5/11-STF-7,62 - 1806096



Plug component, Nominal current: 12 A, Rated voltage (III/2): 630 V, Number of positions: 11, Pitch: 7.62 mm, Connection method: Front screw connection, Color: green, Contact surface: Tin

## Base strip - GMSTB 2,5/11-GF-7,62 - 1806313

### Accessories

Printed-circuit board connector - GMVSTBR 2,5/11-STF-7,62 - 1847974



Plug component, Nominal current: 12 A, Rated voltage (III/2): 630 V, Number of positions: 11, Pitch: 7.62 mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface: Tin

Printed-circuit board connector - GMVSTBW 2,5/11-STF-7,62 - 1848083



Plug component, Nominal current: 12 A, Rated voltage (III/2): 630 V, Number of positions: 11, Pitch: 7.62 mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface: Tin

Printed-circuit board connector - GMSTB 2,5/11-STF-7,62 - 1858853



Plug component, Nominal current: 12 A, Rated voltage (III/2): 630 V, Number of positions: 11, Pitch: 7.62 mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface: Tin

Printed-circuit board connector - GFKC 2,5/11-STF-7,62 - 1939837




Plug component, Nominal current: 12 A, Rated voltage (III/2): 630 V, Number of positions: 11, Pitch: 7.62 mm, Connection method: Push-in spring connection, Color: green, Contact surface: Tin, COMBICON connectors may only be activated under no load conditions. If for operating reasons small loads must be switched, experimental values are available upon request.


### Drawings

## Base strip - GMSTB 2,5/11-GF-7,62 - 1806313

Drilling diagram

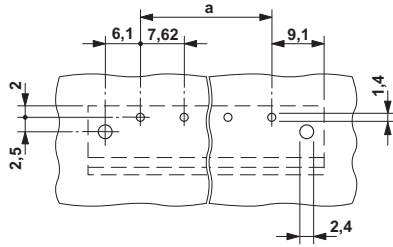

Dimensional drawing

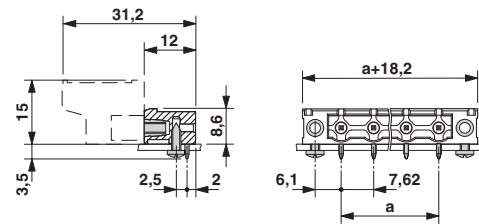

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1806313](#)