

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

NOV , 2004.

© COPYRIGHT 2004 By -

ALL RIGHTS RESERVED.

LOC	ES
-----	----

	DIST
--	------

REVISIONS

	F
--	---

LTR

DESCRIPTION

DATE _____

	DWN
--	-----

APVD



B3

REVISÉD PER ECO-11-005033


29MAR11

RK

HMR

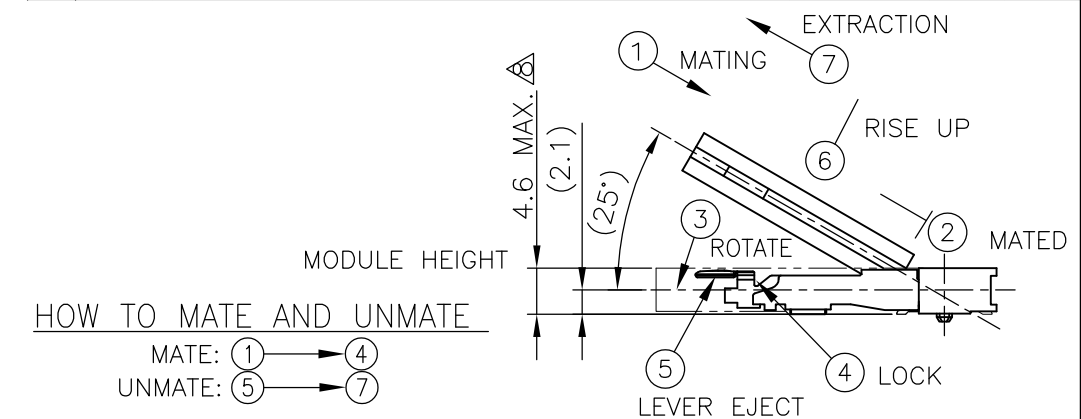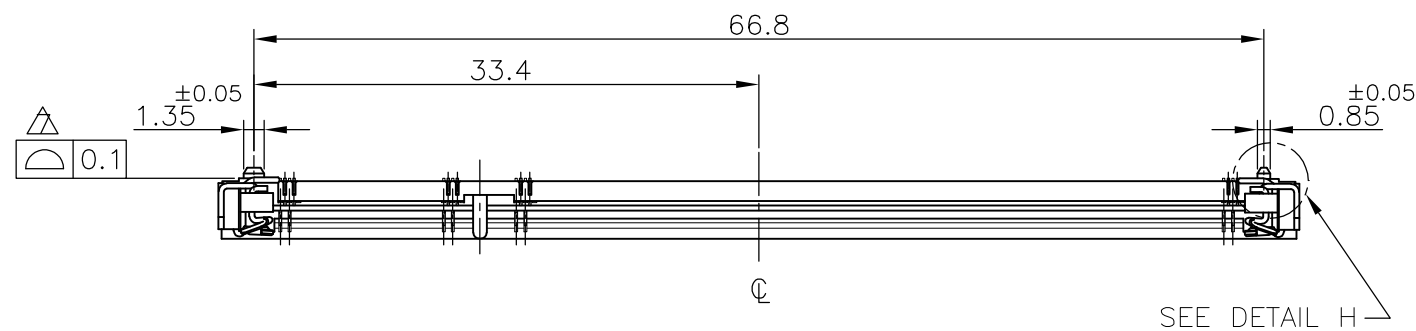

RECOMMENDED MATING P.C.B. OUTLINE

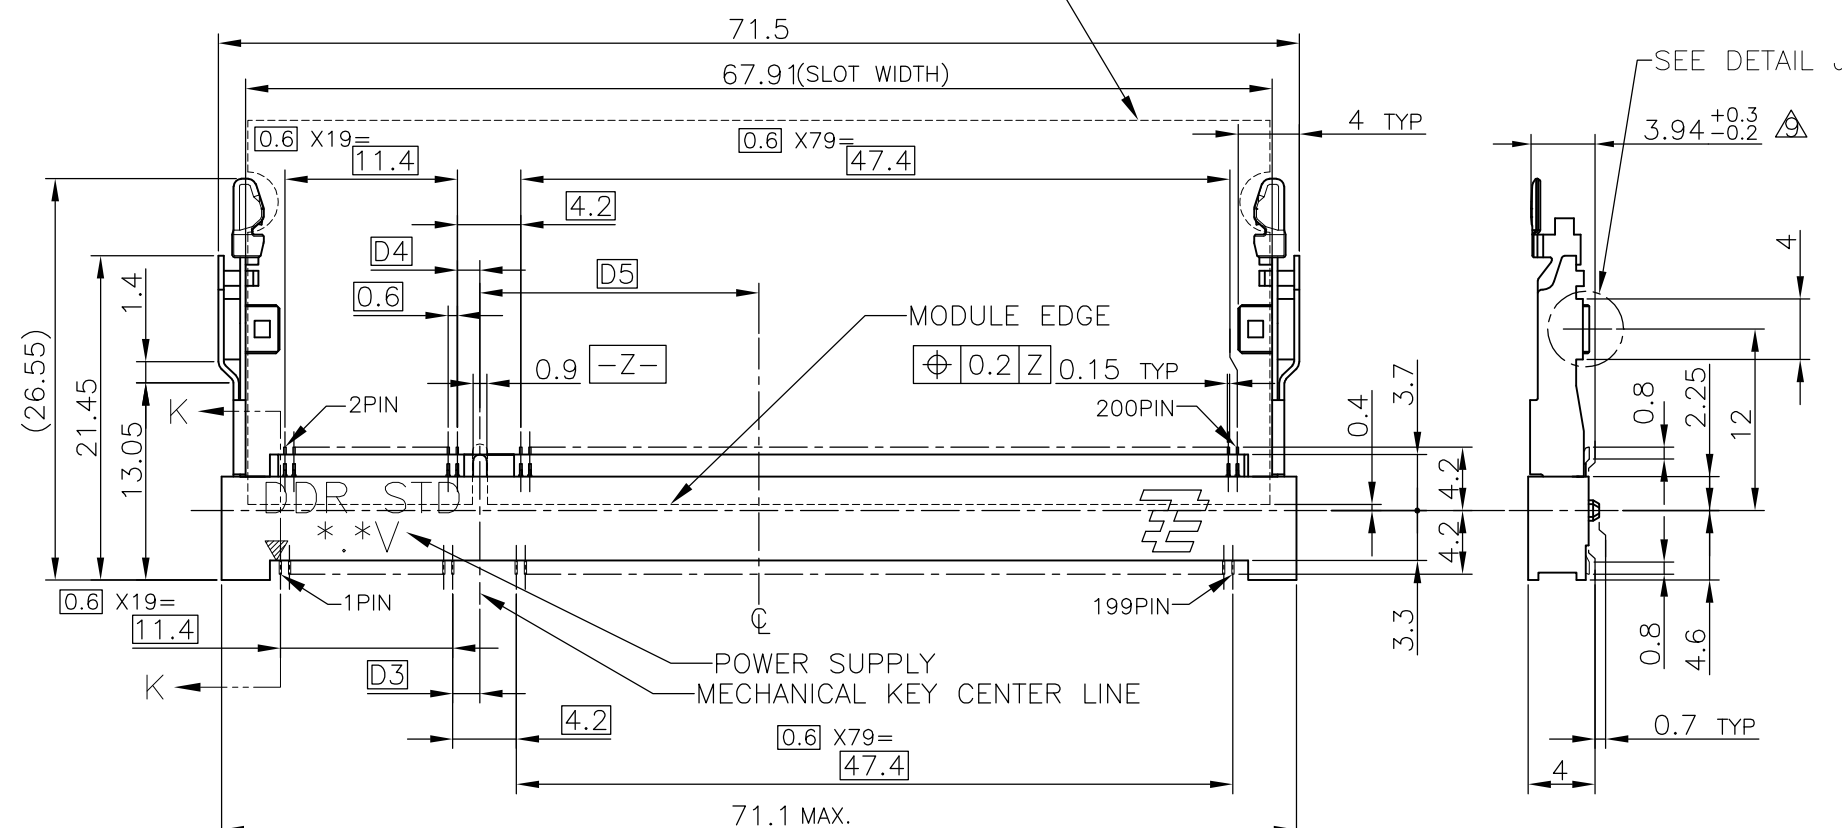

(APPLIED TO SHEET 1-2)

1. MATERIAL ; HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0
CONTACT: COPPER ARROY
LOCK LEVER: STAINLESS STEEL

△ FINISH ; CONTACT AREA: GOLD FLASH ON 0.0013MIN ALL OVER NICKEL.
SOLDERING AREA: GOLD FLASH PLATING.
LOCK LEVER: TIN PLATING.

⚠ MECHANICAL KEY POSITION OF CONNECTOR SEE TABLE.

4 TOLERANCES NON-CUMULATIVE.

5 NOT TO SCALE.

△ 6 □ INSIDE MUST BE RESIST COAT EXCEPT SOLDER PATTERN.

COPLANARITY : 0.1 MAX.

△ THE FLOATING VALUE BY SOLDERING IS NOT INCLUDED.

9 NOT MATING CONDITION.

10 IF THE MODULE DOESN'T INSERT AND LOCK IN THE LATCH SMOOTHLY, OPEN WIDE BOTH LATCHES BY MANUAL. AND THE MODULE MUST BE INSERTED AND LOCKED IN THE LATCH.

△ FINISH ; CONTACT AREA: GOLD PLATING 0.000254MIN
ON 0.0013MIN ALL OVER NICKEL.

SOLDERING AREA: GOLD FLASH PLATING.
LOCK LEVER: TIN PLATING.

AVAILABLE		1.8V (DDR2)	17.55	2.4	2.7	200	292406 -5
AVAILABLE		1.8V (DDR2)	17.55	2.4	2.7	200	292406 -4
TOOLING STATUS	REMARK	POWER SUPPLY	D5	D4	D3	POS	PART NO.
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LEO ZHOU 25MAY05	TE Connectivity				
		CHK T.KAWAMAE 25MAY05					
DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	APVD STEVEN YAO 25MAY05	NAME DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH 200POS LOW PROFILE STANDARD TYPE (LATCH DIRECT SOLDERING TYPE)				
		PRODUCT SPEC 108-5701					
		APPLICATION SPEC					
MATERIAL		FINISH	WEIGHT 3.2 g	SIZE A3	CAGE CODE 00779	DRAWING NO C-292406	
	CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 4	REV B.3		

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

NOV ,2004.

© COPYRIGHT 2004 By -


ALL RIGHTS RESERVED.

LOC
ES

DIST


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

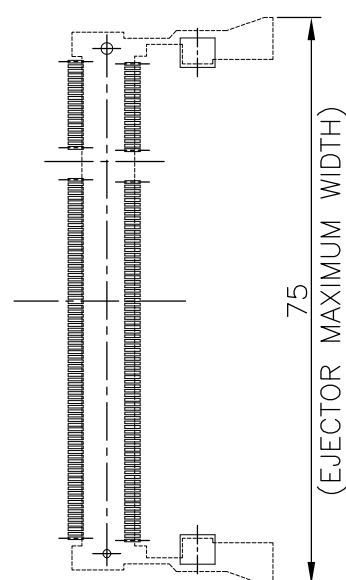
REFERENCE P.C. BOARD PATTERN LAYOUT
(CONNECTOR MOUNTING SIDE)

REAL SIZE (SCALE 1:1)

1.8V	17.55	2.4	2.7
2.5V	18.45	1.5	1.8
POWER SUPPLY	D5	D4	D3

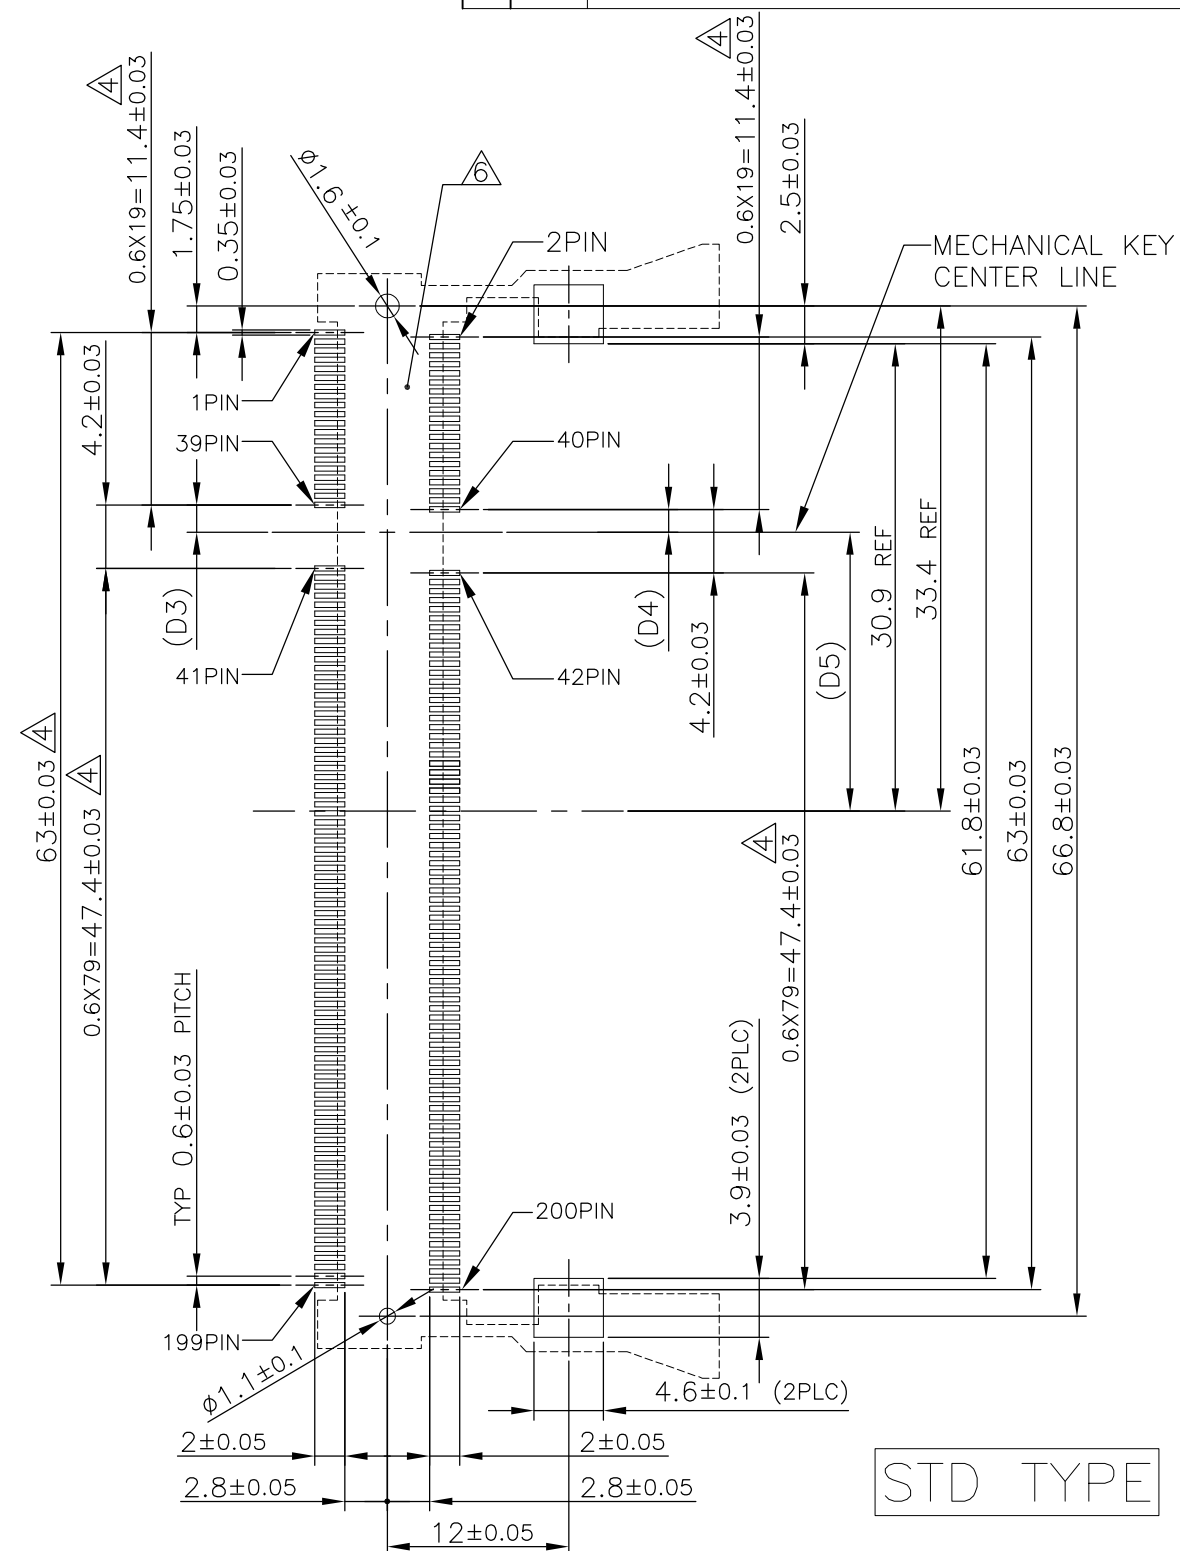

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

STE

TE Connectivity

NAME

DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH
200POS LOW PROFILE STANDARD TYPE
(LATCH DIRECT SOLDERING TYPE)

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO


A300779





C-292406

SCALE 2:1


SHEET 2 OF 4

REV B3

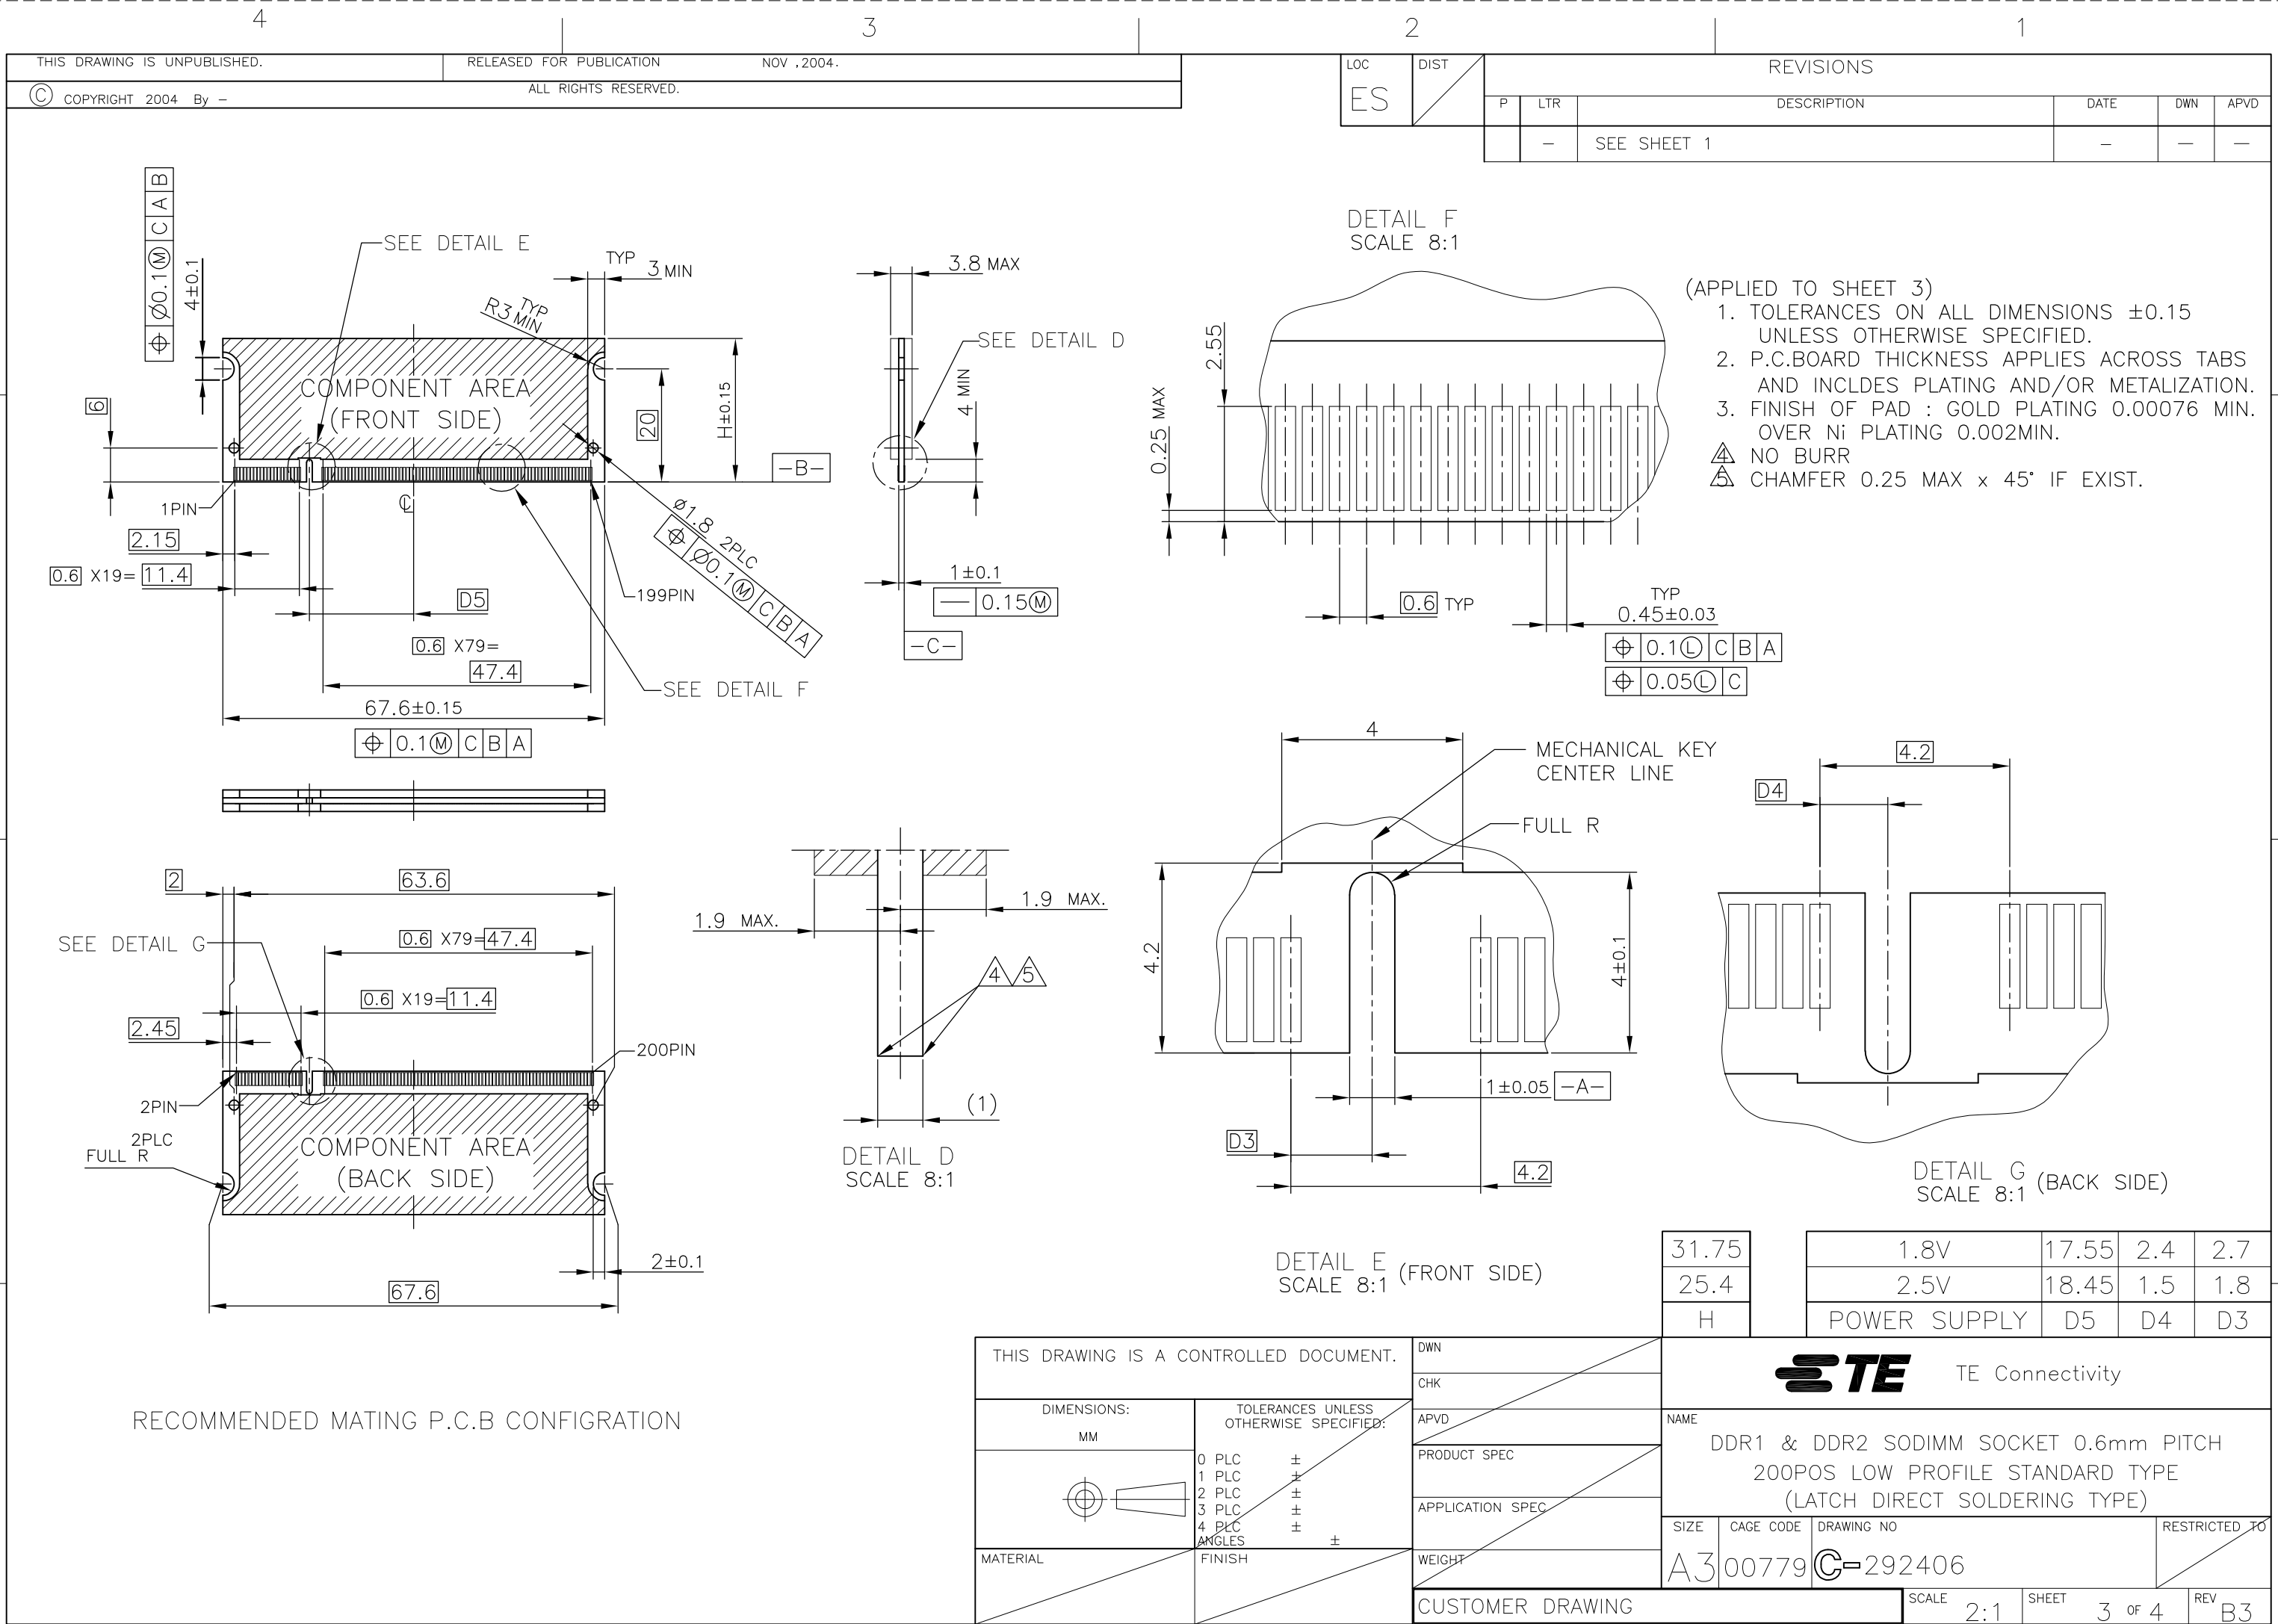

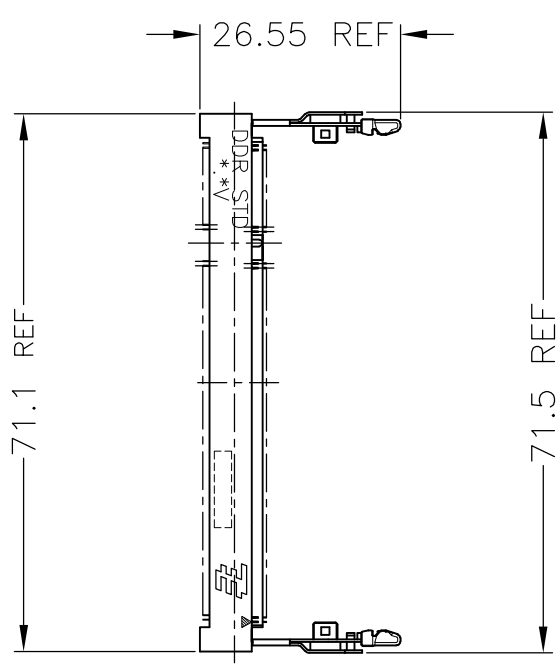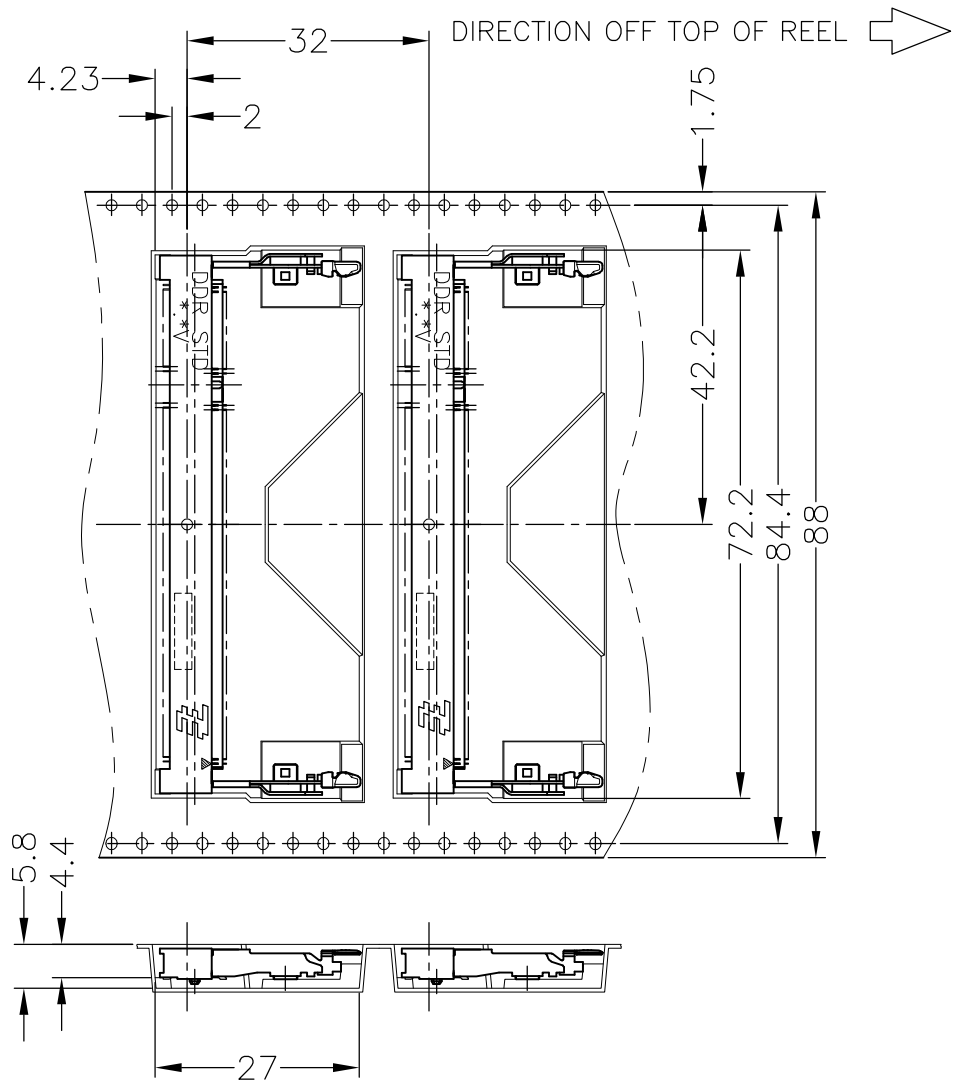

CONNECTOR DETAIL

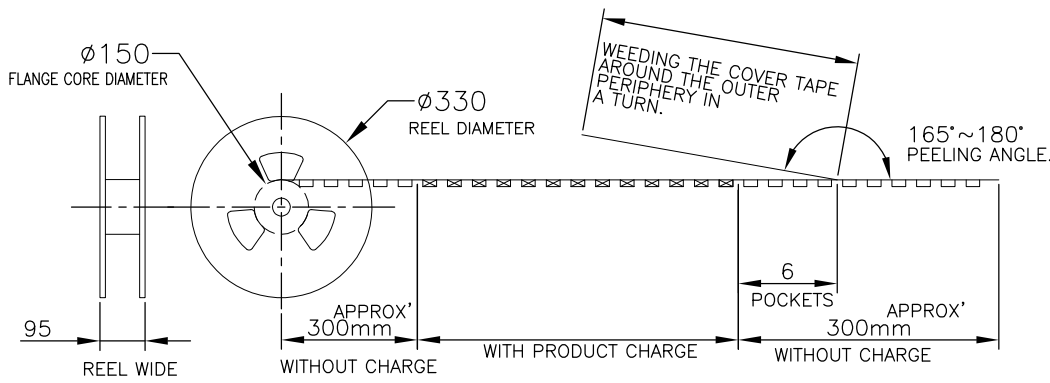

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	

MATERIAL

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME

DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH
200POS LOW PROFILE STANDARD TYPE
(LATCH DIRECT SOLDERING TYPE)

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-292406

SCALE

1:1

SHEET

4 OF 4

REV

B3

AVAILABLE

200EA/EMBOSS

292406-5

AVAILABLE

200EA/EMBOSS

292406-4

TOOLING STATUS

QTY

P/N

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[292406-4](#)