



## ■ Typical Specifications

Items	Specifications
Rating (max.)	50mA 12V DC
Rating (min.)	10μA 1V DC
Initial contact resistance	500mΩ max.
Travel (mm)	0.2

## ■ Product Line

Product No.	Operating force	Operating direction	Operating life (5mA 5V DC)	Guide bosses	Minimum order unit (pcs.)	
					Japan	Export
SKRTLAE010	1.6N	Side push	100,000 cycles	With	3,000	3,000
SKRTLBE010				Without		


## ■ Packing Specifications

## Taping

Number of packages (pcs.)			Tape width (mm)	Export package measurements (mm)
1 reel	1 case / Japan	1 case / export packing		
3,000	30,000	30,000	12	395×395×205

## Note


For reels of 330mm diameter, please inquire.

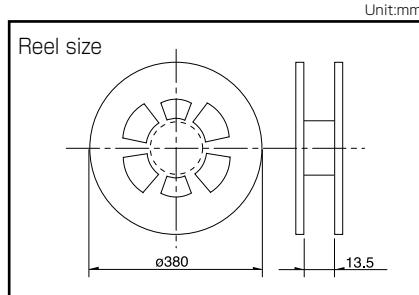

## ■ Dimensions

Style	PC board mounting hole and land dimensions (Viewed from switch mounting face)

## ■ Circuit Diagram

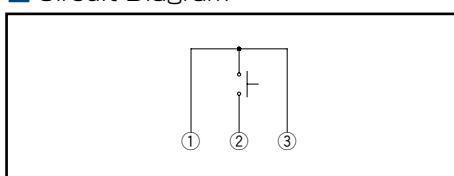

Refer to P.249 for soldering conditions.

Type		Sharp Feeling Type			Soft Feeling Type											
		Surface Mount			Snap-in	Surface Mount										
Series		SKSC	SKRT	SKRH	SKPF	SKPS	SKPM	SKPG	SKPR							
Photo																
Features		Low-profile	—	4-direction switch +push switch	High operation force Long travel	Low contact resistance		—	High operation force Low contact resistance							
Water-proof		—	—	—	—	—	—	—	—							
Dust-proof		—	—	—	—	—	—	—	—							
IP standard		—	—	—	—	—	—	—	—							
Operating direction	Top push	—	—	●	●	●	●	●	●							
	Side push	●	●	●	—	—	—	—	—							
Dimensions (mm)	W	3.5	4.5	7.35	8	5.9		6.6	7.5							
	D	3.55	3.4	7.5	9	6		6.3	7.8							
	H	1.25	3.3	5	10	5			6.5							
Contact		—	—	—	Carbon	Silver		Carbon	Silver							
Operation force coverage	1N max.			See the relevant pages for respective product descriptions												
	1N to 2N															
	2N to 3N															
	3N to 4N															
	4N to 5N															
Travel (mm)		0.2		1.75	See the relevant pages for respective product descriptions	1.05	1.3		1							
Ground terminal		○	●	●	—	—	—	—	—							
Operating temperature range		-30°C to +85°C	-40°C to +90°C	-40°C to +85°C	-40°C to +90°C											
Automotive use		—	—	—	●	●	●	●	●							
Life Cycle																
Electrical performance	Rating (max.) (Resistive load)	50mA 12V DC				50mA 16V DC		5mA 12V DC	50mA 16V DC							
	Rating (min.) (Resistive load)	10μA 1V DC														
	Insulation resistance	100MΩ min. 100V DC 1min.														
	Voltage proof	100V AC 1min.	250V AC 1min.	100V AC 1min.	250V AC 1min.											
Durability	Vibration	10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z for 2 hours respectively														
	Lifetime	Shall be in accordance with individual specifications.														
Environmental performance	Cold	-40°C 96h				-40°C 1,000h		-40°C 96h	-40°C 1,000h							
	Dry heat	90°C 96h				90°C 1,000h		90°C 96h	90°C 1,000h							
	Damp heat	60°C, 90 to 95%RH 96h				60°C, 90 to 95%RH 1,000h		60°C, 90 to 95%RH 96h	60°C, 90 to 95%RH 1,000h							
Page		239	241	444	244	245	246	247	248							

W : Width. The most outer dimension excluding terminal portion.  
D : Depth. The most outer dimension excluding terminal portion.

TACT Switch™ Soldering Conditions . . . . .	249
TACT Switch™ Cautions . . . . .	250


## Notes

**NOTES**

1. The automotive operating temperature range to be individually discussed upon request.
2. ● Indicates applicability to all products in the series.

## Condition for Reflow

Available for Surface Mount Type.  
Temperature profile

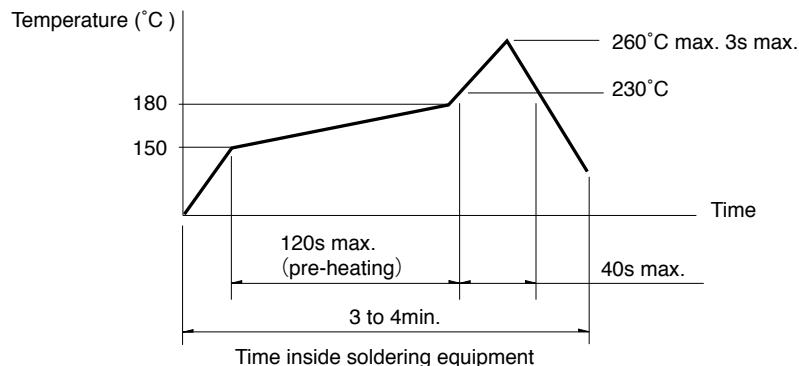

## Notes

1. Please confirm the specifications of our product for the detailed condition.
2. Soldering conditions differ depending on reflow soldering machines.  
Prior verification of soldering condition is highly recommended.

## Conditions for Auto-dip

Available for Snap-in Type and Radial Type.

Items	Condition
Flux built-up	Mounting surface should not be exposed to flux
Preheating temperature	Ambient temperature of the soldered surface of PC board. 100°C max.
Preheating time	60s max.
Soldering temperature	260°C max.
Duration of immersion	5s max.
Number of soldering	2times max.

## SKHH Series

Items	Condition
Flux built-up	Mounting surface should not be exposed to flux
Preheating temperature	Ambient temperature of the soldered surface of PC board. 110°C max.
Preheating time	60s max.
Soldering temperature	260°C max.
Duration of immersion	5s max.
Number of soldering	2times max.

## SKHL Top Push Type, SKQJ Series

Items	Condition
Flux built-up	Mounting surface should not be exposed to flux
Preheating temperature	Ambient temperature of the soldered surface of PC board. 100°C max.
Preheating time	45s max.
Soldering temperature	255°C max.
Duration of immersion	5s max.
Number of soldering	2times max.

## Notes

1. Prevent flux penetration from the top side of the TACT Switch™.
2. Switch terminals and a PC board should not be coated with flux prior to soldering.
3. The second soldering should be done after the switch is stable with normal temperature.
4. Use the flux with a specific gravity of min 0.81.  
(EC-19S-8 by TAMURA CORPORATION, or equivalents.)

## Manual Soldering

Items	Condition
Soldering temperature	350°C max.
Duration of soldering	3s max.
Capacity of soldering iron	60W max.

## SKHH, SKHW Series

Items	Condition
Soldering temperature	360°C max.
Duration of soldering	3s max.
Capacity of soldering iron	60W max.

## SKTD, SKTG, SKQJ Series

Items	Condition
Soldering temperature	350°C max.
Duration of soldering	3s max.
Capacity of soldering iron	20W max.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ALPS:](#)

[SKRTLBE010](#) [SKRTLAE010](#)