


1 POINT OF MEASUREMENT FOR PLATING THICKNESS

2 THE TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

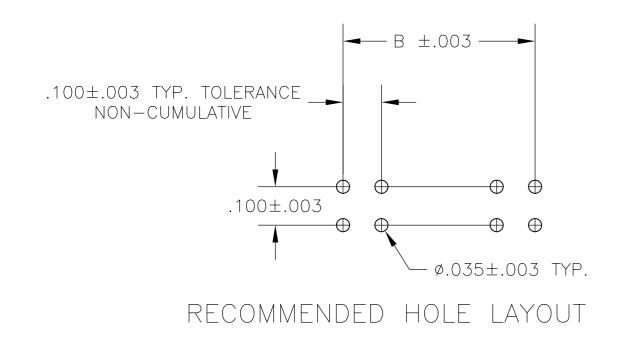

1471-9 (3/11)

В

А

								D
			3.900	39	80	4-872		
			3.800	38	78	3-	-9	
			3.700	37	76	3-	-8	
			3.600	36	74	3-	-7	
			3.500	35	72	3-	-6	
			3.400	34	70	3-	-5	
			3.300	33	68	3-	-4	
			3.200	32	66	3-	-3	
			3.100	31	64	3-	-2	
			3.000	30	62	3-	- 1	
			2.900	29	60	3-	-0	~
			2.800	28	58	2-	-9	С
			2.700	27	56	2-	-8	
			2.600	26	54	2-		
			2.500	25	52	2-	-6	
			2.400	24	50	2-	-5	
			2.300	23	48	2-	-4	
			2.200	22	46	2-	-3	
			2.100	21	44	2-	-2	
			2.000	20	42	2	- 1	
			1.900	19	40	2-	-0	
			1.800	18	38	1-	-9	
			1.700	17	36	1-	-8	
			1.600	16	34	1-	-7	
			1.500	15	32	1-	-6	
			1.400	14	30	1 —	-5	2
			1.300	13	28	1-	-4	8721
			1.000	10	22	1-	-3	0
		284	.200	2	6	1-	-2	В
		184	.100	1	4	1-	- 1	
)84			2	1-	-0	
			1.200	12	26		-9	
			1.100	1 1	24		-8	
		984	.900	9	20			
		384	.800	8	18		-6	
		784	.700	7	16		-5	
		584	.600	6	14		-4	
		584	.500	5	12		-3	
		184	.400	4	10	070	-2	
		384	.300	3	8	0/2	215 - 1	
		С	В	A	NO OF POS	ASSEI PAI NUM	RT	
THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN 3-15-2 L. MAYER CHK 5-21-4		2	TE	te c	onnectivity	,	А
DIMENSIONS: INCHES UNCHES 0 PLC ± - 1 PLC ± -	T. ZOLA APVD 5–21–1 R.ELICKER PRODUCT SPEC	85 NAME		SEMBLY, I Ble Row,				, ,
$\begin{array}{c c} & 1 & PLC & \pm & -\\ 2 & PLC & \pm & -\\ 3 & PLC & \pm & .005 \end{array}$	APPLICATION SPEC	_		TICAL, .02				
MATERIAL HOUSING-FLAME RETARDENT	WEIGHT	SIZE	cage code dr)	F	RESTRICTED TO	
THERMOPLASTIC, COLOR-BLACK THE CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER DODOSON NICKEL	CUSTOMER DRAWING	/ \∠		SCALE		ET 1 OF 1	REV	
POSTS-PHOS BRONZE	L						J4	

REVISIONS

DESCRIPTION

J4 PART STATUS UPDATED IN PARTS LIST TABLE

2

27AUG2015 KJK PS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 87215-8