



TERMINAL LOCATION DIAGRAM

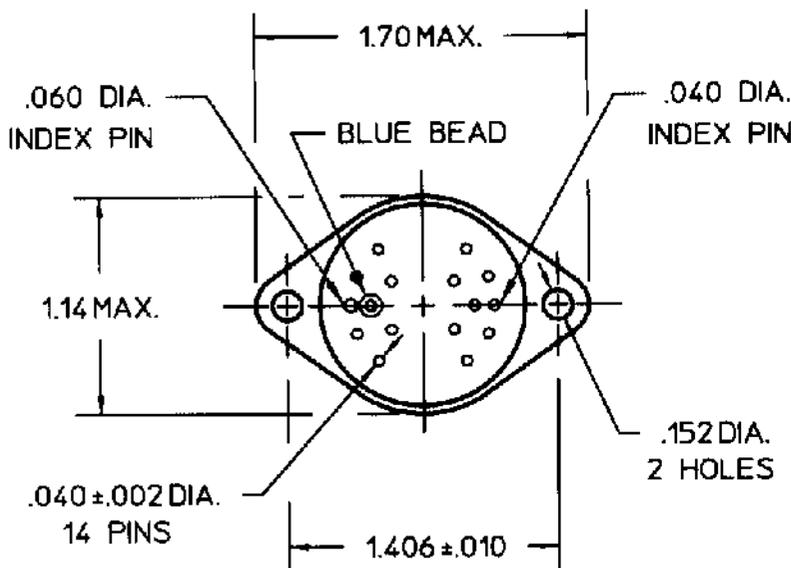

REV. 1 3/12/99  
DCO 50172

COIL: @ 25°C	
RESISTANCE	350 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

CUSTOMER DATA SHEET



TERMINAL VIEW

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 10 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °F TO +125 °F

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE  
100,000 OPERATIONS

NOTES: OPERATE 15 MS MAX  
RELEASE 10 MS MAX  
CONTACT BOUNCE 5 MS MAX

DR. R.B. 9/25/98 CK3/12/2008



CUST. QPL  
CUST. NO. M5757/7-003

TYPE "RD" RELAY

RD4CB2600

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[RD4CB2600](#)