


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	TECHNICAL DATA SHEET RELEASE	12-MAY-14	KMM	RFC

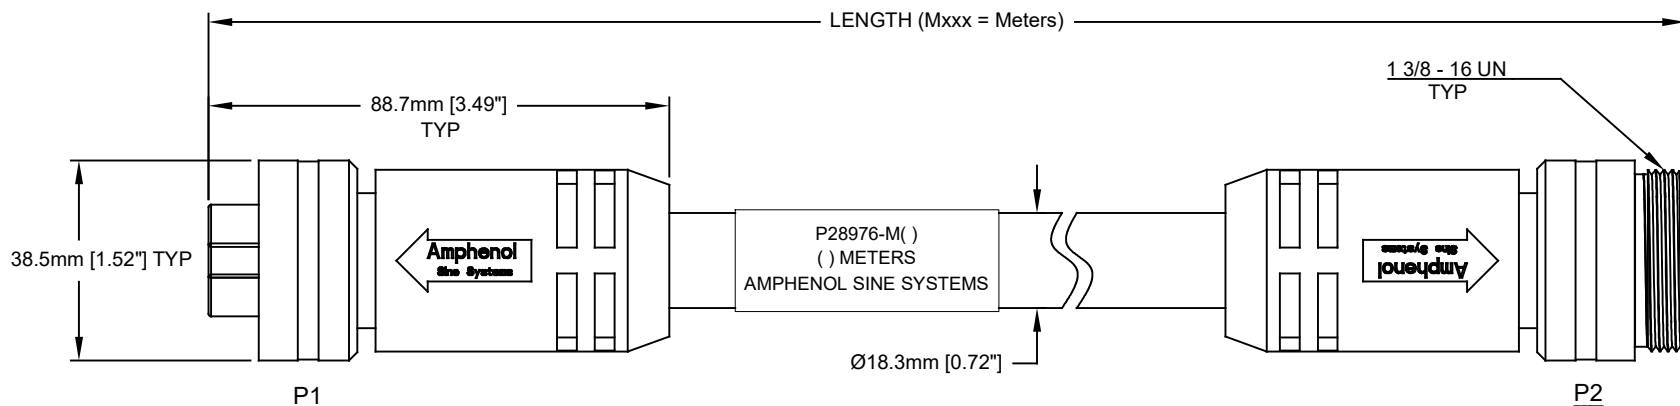


TECHNICAL DATA:

- 1) MATERIALS:
 COUPLING NUT: MACHINED ALUMINUM, ANODIZED
 INSULATION INSERT: THERMOPLASTIC, UL 94/V-0
 CONTACT: GOLD FLASH PLATING OVER COPPER ALLOY
 OVERMOLD MATERIAL: THERMOPLASTIC COLOR: BLACK
 CABLE RATING: UL LISTED DUAL RATED TC-ER/STOOW,
 CSA TYPE STOOW, FT4 FLAME RATING, 600V,
 90°C DRY & 75°C WET (TC-ER), 105°C (STOOW)
 CABLE JACKET MATERIAL: PVC COLOR: BLACK
 CONDUCTOR INSULATION: PVC
 NUMBER OF CONDUCTORS: (4) 10AWG

- 2) ELECTRICAL DATA:
 CURRENT (MAX): 25A
 VOLTAGE (MAX): 600V AC/DC
 INSULATION RESISTANCE (MIN): 5000M OHMS
 DIELECTRIC TEST VOLTAGE: 2200V
 SHORT CIRCUIT AMPERAGE RATING: 65kA - BREAKERS AND FUSES

- 3) MECHANICAL DATA:
 TEMPERATURE RANGE: -40°C TO 90°C
 PROTECTION: IP67 (MATED CONDITION)
 MATING CYCLES: >500
 VIBRATION RESISTANCE PER MIL-STD-202 METHOD 204
 THERMAL SHOCK PER MIL-STD-202 METHOD 207
 48 HOUR SALT SPRAY PER MIL-STD-202 METHOD 101

- 4) RoHS COMPLIANT
 5) UL 2237 LISTED ASSEMBLY
 UL FILE NUMBERS: E339703

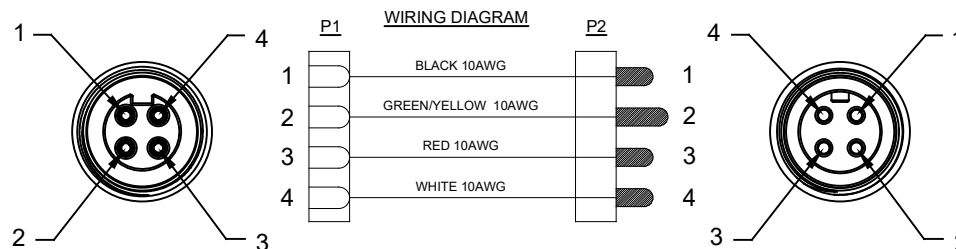

Amphenol P/N	ROCKWELL P/N	MOLEX	TURCK
P28976-M*	280-PWRM35A-M*	CC4030A48M*	GSDAGKDA40-*M
P28976-M1	280-PWRM35A-M010	CC4030A48M010	GSDAGKDA40-010M
P28976-M2	280-PWRM35A-M020	CC4030A48M020	GSDAGKDA40-020M
P28976-M3	280-PWRM35A-M030	CC4030A48M030	GSDAGKDA40-030M
P28976-M5	280-PWRM35A-M050	CC4030A48M050	GSDAGKDA40-050M
P28976-M10	280-PWRM35A-M100	CC4030A48M100	GSDAGKDA40-100M

TOLERANCE	
0-2.99 M = +100.0/-25.0mm	0-9.99 FT = +4" / -1"
3-8.99 M = +150.0/-25.0mm	10.00-29.99 FT = +6" / -1"
9-14.99 M = +300.0/-25.0mm	30.00-49.99 FT = +12" / -1"
15-OVER M = +450.0/-25.0mm	50 FT-OVER = +18" / -1"

PART NUMBER		DESCRIPTION		ITEM
QUANTITY		MATERIALS LIST		
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions ±1/64 2 PL DEC ±0.15 Angles ±1° 3) Note reference =		SIGNATURES DRAWN: KMM CHECKED: MRF ENGINEER: KMM APPROVAL: RFC CUSTOMER:		DATE 12-MAY-14 12-MAY-14 12-MAY-14
MATERIAL SPECIFICATIONS:		 Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036 M35 POWERBOSS LITE, 4 PIN, M/F, 10 AWG, TC-ER/STOOW, PVC JACKET		
PROCESS SPECIFICATIONS:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.		
NEXT ASSY:		SIZE C-	TYPE P28976-Mxxx	REVISION A1
		SCALE FULL	C-P28976	SHEET 1 OF 1

TYP: 435 PB LITE, 4 PIN, M/F, 10AWG, TC-ER/STOOW, PVC JACKET
 REV: A1
 SHEET: 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[P28976-M1](#) [P28976-M2](#) [P28976-M3](#) [P28976-M4](#) [P28976-M5](#) [P28976-M8](#) [P28976-M0.5](#) [P28976-M1.5](#) [P28976-M2.5](#) [P28976-M10](#) [P28976-M14](#) [P28976-M15](#)