

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS


| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|---------------|-----------|-----|------|
| | E | ECR-09-007414 | 02JUN2009 | KG | DW |
| | F | ECR-17-001574 | 11APR2017 | KG | DW |
| | | | | | |
| | | | | | |

1. USE WITH FERRULE ASSEMBLY KIT P/N 1588908-2 (125um), OR 1588908-1 (126um).
QUANTITY OF 2 REQUIRED. FERRULE MUST BE PC-POLISHED DURING FIBER TERMINATION
FOR BEST PERFORMANCE.

2. PROTECTIVE LABEL APPLIED AFTER FINAL CLEAN ROOM TEST TO PREVENT
OPTICAL CAVITY CONTAMINATION. REMOVE ONLY WHEN READY TO ASSEMBLE.



3. SINGLEMODE IDENTIFIER.

4. FOR USE AT BOTH 1310 AND 1550nm WAVELENGTHS.

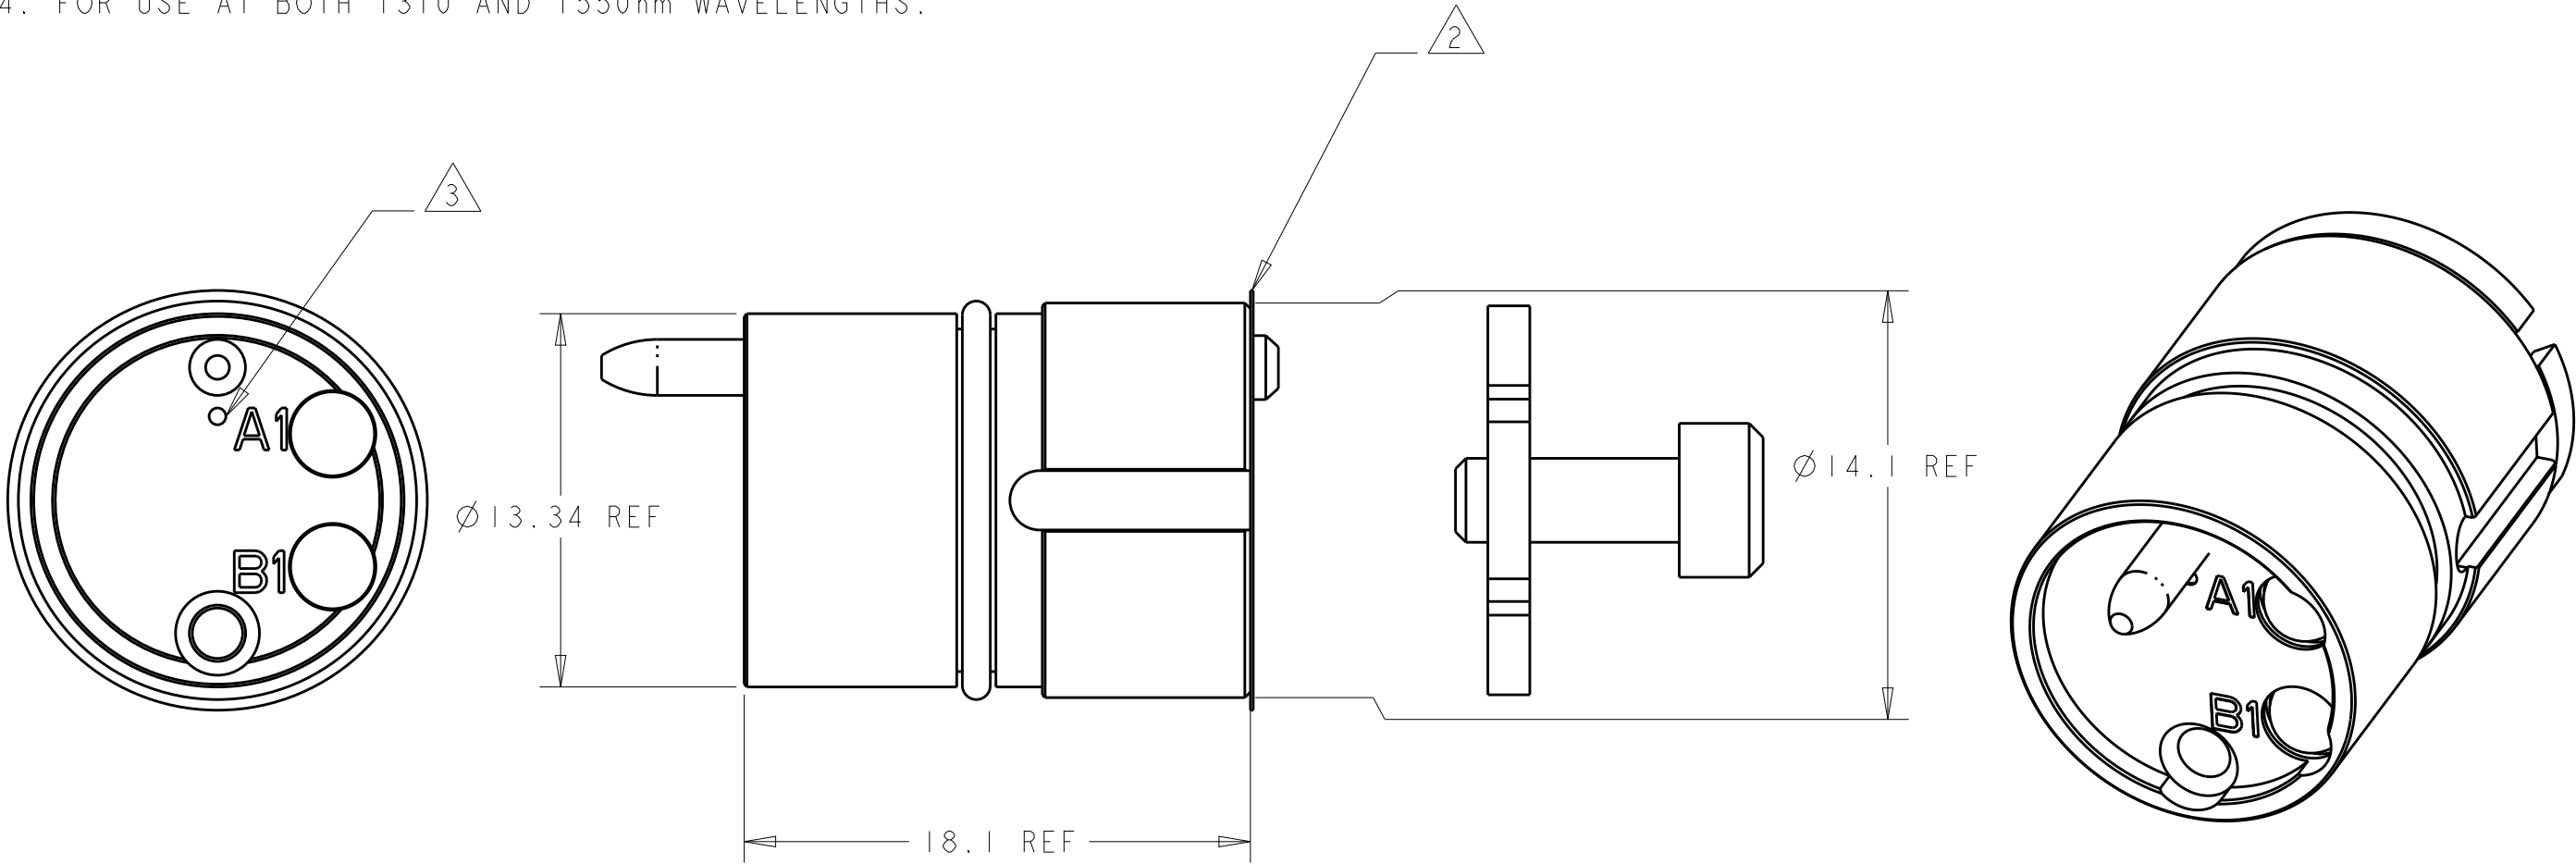

1515739-1

PART NO.

| | | | | | |
|---|--|---------------------------------|---|--|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN E. HOPKINS 08OCT2002 |  TE Connectivity | | |
| DIMENSIONS: mm | | CHK D. WERTMAN 08OCT2002 | | | |
|  | | APVD D. WERTMAN 08OCT2002 | NAME INSERT ASSEMBLY, PRO BEAM JR., 2x1310/1550nm SM | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | PRODUCT SPEC | - | | |
| 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± | | APPLICATION SPEC | - | | |
| MATERIAL STAINLESS ALLOYS & NBR | | WEIGHT | - | | |
| FINISH N/A | | CUSTOMER DRAWING | SCALE 4:1 SHEET 1 OF 1 REV F | | |
| | | | SIZE A3 CAGE CODE 00779 DRAWING NO C-1515739 RESTRICTED TO - | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1515739-1](#)