

Digital Counters & Tachometers

H7CX-□



H7CX-A-series
Multifunction Preset Counter
with Four Digits



H7CX-A-series
Multifunction Preset Counter
with Six Digits



H7CX-R-series
Digital Tachometer

Space-Saving 1/16 DIN Counters with
All-in-One Functionality to Solve Most Counting and Positioning Applications


Small and Flexible

A shorter body enables mounting in thin control panels.
Models with terminal blocks for 24 VAC/12 to 24 VDC:
Only **59 mm depth**, the shortest body for any industrial counter.

Models with terminal blocks for 100 to 240 VAC:
Only **78 mm depth**, the shortest body for any industrial
counter that isolates the power supply and input circuits.

Model with Sockets: 63.7 mm (case dimension)

The above claims apply to timers with a maximum ambient temperature of 55°C.
According to Omron investigations June 2009.



Waterproof, Dust-proof Front Panel
(UL508 Type 4X and IP66)

Worry-free
application is
possible in locations
subject to water.



Expanded Tachometer Functions

1. One-input measurement
Measurement operation with one input. Select the HI-LO, AREA, HI-HI, or LO-LO output mode.
2. Independent Measurement for Two Inputs
Measurement operation with two independent inputs.
3. Differential Input for Two Inputs
Measuring the difference between two inputs (CP1-CP2).
4. Absolute Ratio for Two Inputs
Measuring the ratio between two inputs (CP1/CP2).
5. Error Ratio between Two Inputs
Measuring the ratio between two inputs ((CP1-CP2)/CP2)).

Safe and Reliable

Power supply circuit and input circuits are
isolated inside the Counter/Tachometer for
100-240 VAC models. You no longer have
to take steps to prevent unwanted circuit paths.



Upper limit for the set value helps prevent
incorrect settings.




Service Life Notification

The output counter counts the number of times the output turns ON (alarms can be displayed and the count can be monitored in increments of 1,000 operations). This counter is useful in managing the service life of the Counter/Tachometer or the load.

Easy and Smart

The larger characters and wider viewing angle join a bright display for easy reading even in well-lit locations.

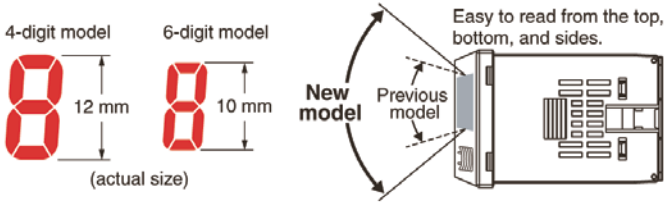

Orange Added to Switchable Display Colors

Switchable display colors readily show the output status.

Using green when Output is OFF

Using orange when Output is ON



Green - Orange
Red - Green
Orange - Red, Etc.

Display colors can be switched only on models with terminal blocks.

Ordering

Type	Classification	Configuration	External connections	Settings	Display Digits	Output	Supply Voltage	Models	
H7CX-A series	Preset counter	1-stage preset counter Total and preset counter	11-pin socket	1-stage	4 digits	Contact output (SPDT)	100 to 240 VAC	H7CX-A114-N	
					6 digits		12 to 24 VDC/24 VAC	H7CX-A114D1-N	
			Screw terminals	4 digits	100 to 240 VAC		H7CX-A11-N		
				6 digits	12 to 24 VDC/24 VAC		H7CX-A11D1-N		
				4 digits	100 to 240 VAC		H7CX-A4-N		
	Preset counter/ Tachometer	1-stage preset counter 2-stage preset counter Total and preset counter Batch counter Dual counter Twin counter	11-pin socket	2-stage	4 digits	Contact output (SPST + SPDT)	100 to 240 VAC	H7CX-A4W-N	
					6 digits		100 to 240 VAC	H7CX-AW-N	
					6 digits		12 to 24 VDC/24 VAC	H7CX-AWD1-N	
					6 digits		Contact output (SPDT)+ Transistor output (SPST)	100 to 240 VAC	H7CX-AU-N
					6 digits		12 to 24 VDC/24 VAC	H7CX-AUD1-N	
H7CX-R series	Tachometer	Tachometer	11-pin socket	1-stage (1 input and output)	Contact output (SPDT)	100 to 240 VAC	H7CX-R11-N		
				1-stage (2 inputs and outputs)		12 to 24 VDC/24 VAC	H7CX-R11D1-N		
			Screw terminals	1-stage (1 input and output)		100 to 240 VAC	H7CX-R11W-N		
				1-stage (2 inputs and outputs)		12 to 24 VDC/24 VAC	H7CX-R11WD1-N		

Note: Additional models with transistor output available. Please see datasheet for more details.

Accessories (Order Separately)

Front Panels

Color	Models	Applicable Counters
Light gray (5Y7/1)	Y92P-CXC4G	4-digit Counter
White (5Y9.2/0.5)	Y92P-CXC4S	
Black (N1.5)	Y92P-CXC4B	
Light gray (5Y7/1)	Y92P-CXC6G	6-digit Counter
White (5Y9.2/0.5)	Y92P-CXC6S	
Black (N1.5)	Y92P-CXC6B	

Note: Black front panel is a replacement part.



Light gray
(sold separately)



White
(sold separately)

OMRON ELECTRONICS LLC • THE AMERICAS HEADQUARTERS • Schaumburg, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELECTRONICS MEXICO SA DE CV • HEAD OFFICE

Apodaca, N.L. • 52.811.156.99.10 • 001.800.556.6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

M24I-E-01

Note: Specifications are subject to change.

© 2009 Omron Electronics LLC

Printed in U.S.A.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron:](#)

[Y92P-CXC6G](#) [Y92P-CXC6S](#) [Y92P-CXC4S](#) [Y92P-CXC6B](#)