

5

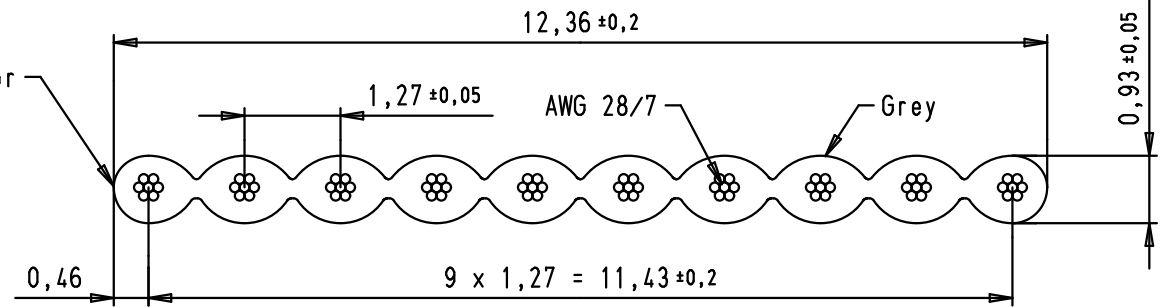
4

3



2

1

Edge mark on first conductor



Wire _____ Tinned copper
 Gauge _____ AWG 28/7 0,089 mm²
 Voltage rating _____ 300 Vr.m.s
 Current rating _____ 2,1A at 25°C
 Capacity unbalanced _____ 45,9 pF/m at 1 MHz
 Impedance unbalanced _____ 105 Ω
 Propagation delay _____ 4,9 ns/m nominal
 Insulation material _____ PVC
 Temperature rating _____ -20°C (operating) to +105°C
 _____ -30°C (static)
 Flammability rating _____ Flame retardant VW1
 Insulation resistance _____ 100 MΩ/km
 Approval _____ UL AWM style 2651

						 All Dim. in mm Orig. Size DIN A 4	SEK 18 flat cable 10 poles	Maßstab/ Scale 10:1
			Detail.	20/10/05	JMDR			
			Insp.					
EC01360	19/02/10	SC	Stand.					
09 18 010 7004	100 m (328 feet)						TB 09 18 010 700X	Blatt/ Page 1 / 1
09 18 010 7001	30,48 m (100 feet)							
Part number	Length per reel							
			Mod.	Dat.	Name	HARTING EURL F-95972 Paris		Sub.

09 18 010 7004	100 m (328 feet)
09 18 010 7001	30,48 m (100 feet)
Part number	Length per reel

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09180107001](#) [09180107004](#)