

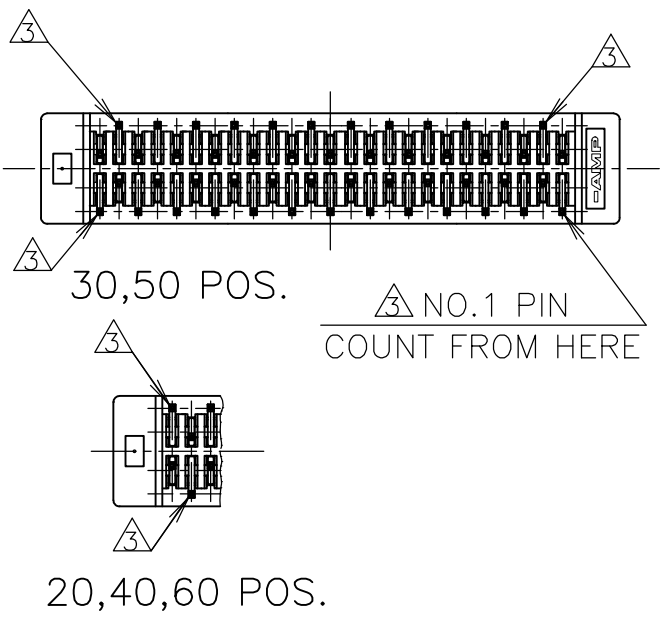
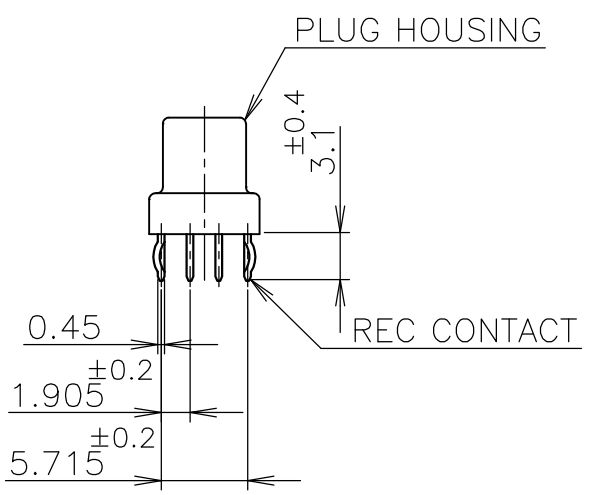
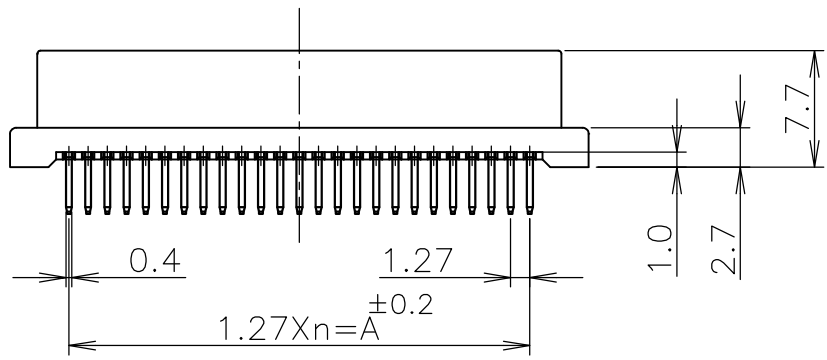


2		1						
LOC	DIST	REVISIONS						
J		P	LTR	DESCRIPTION		DATE	DWN	APVD
			O	RELEASED FJB0-0871-04		24AUG04	C.W	I.E
			01	REVISED PER ECO-09-024927		09NOV09	KK	AEG

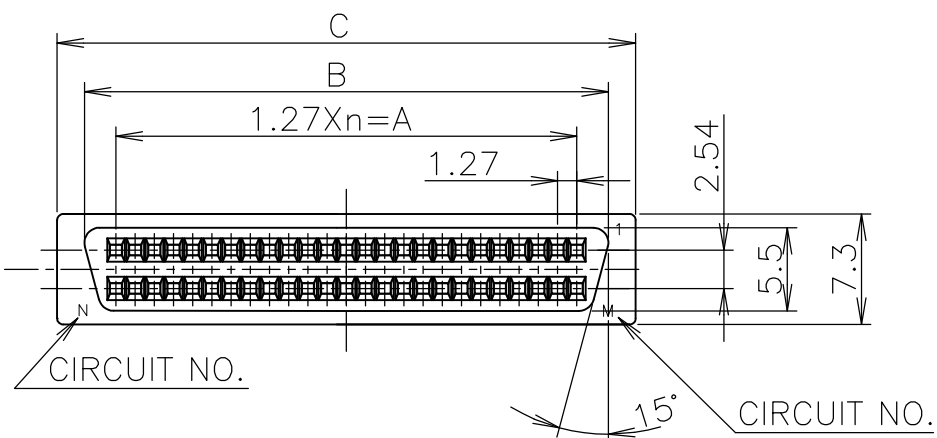


- 1 MATERIAL & FINISH
PLUG HOUSING:THERMOPLASTIC(UL94V-0)
COLOR: BLACK.
REC CONTACT:COPPER ALLOY.
FINISH:OVER NICKEL,MATING END:
0.0002 OR 0.00076 MIN.GOLD,
TERMINATION END:TIN. AND SEALING TREATMENT
ALL OVER.
- 2 P.W.B. LAYOUT AND P.W.B. TREATMENT(REF.)
P.W.B. SURFACE ARE TREATED WITH SOLDER RESIST.
BOARD THICKNESS:1.6mm.
- 3 ON KINK POINT(4 PLACES).
- 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

(NON-CUMULATIVE TOLERANCE) (NON-CUMULATIVE TOLERANCE)

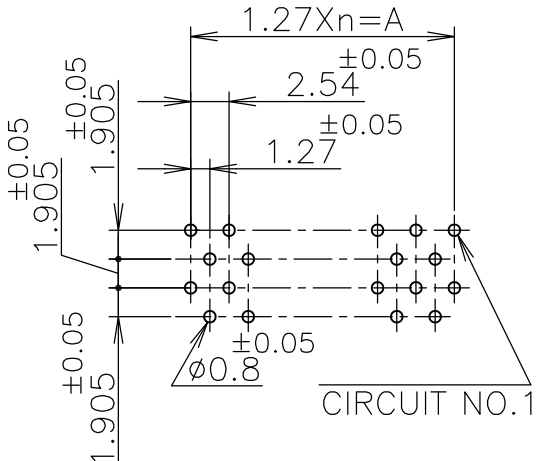

30,50 POS.
CONNECTOR MOUNTING

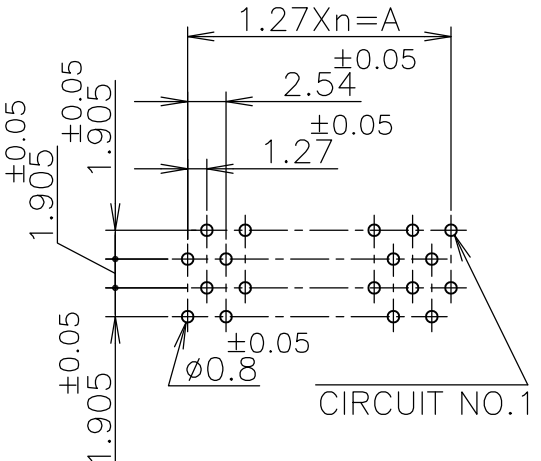

20,40,60 POS.
CONNECTOR MOUNTING

D/D.SINISI	4 OBSOLETE	Au PL. 0.00076 MIN.	20	11	11.43	15.60	19.20	9	20	6—	↑	—5	
			60	31	36.83	41.00	44.60	29	60	6—		—4	
			50	26	30.48	34.65	38.26	24	50	6—		—3	
			40	21	24.13	28.30	31.90	19	40	6—		—2	
			30	16	17.78	21.95	25.55	14	30	6—		—1	
	4 OBSOLETE	Au PL. 0.0002 MIN.	20	11	11.43	15.60	19.20	9	20				—5
			60	31	36.83	41.00	44.60	29	60				—4
			50	26	30.48	34.65	38.26	24	50				—3
			40	21	24.13	28.30	31.90	19	40				—2
			30	16	17.78	21.95	25.55	14	30				—1
	REMARK	N	M	A		B		C		n	POS.	PART NO.	
		CIRCUIT NO.		DIMENSION									

LEAD FREE

GENERAL TOLERANCE	
10 ≥ :	±0.2
30 ≥ > 10:	±0.25
100 ≥ > 30:	±0.3
ANGLES: ±3°	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

MATERIAL

1

DWN
COREL WANG
24AUG04

CHK
STEVEN YAO
24AUG04

APVD
I.ENOMOTO
24AUG04

PRODUCT SPEC
108-60036

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

Tyco Electronics AMP K.K.
Kawasaki,Japan

NAME
PLUG ASSY V WITH KINK
AMPLIMITE .050 SERIES I B-TO-B CONN.

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-5175710

RESTRICTED TO

SCALE
NTS

SHEET
1 OF 1

REV
01

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-5175710-3](#)