THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 2015 ALL RIGHTS RESERVED.

LOC	DIST
J	-

REVISIONS 変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED	11MAY06	SS	KS
	A1	REVISED ECR-10-023798	22NOV10	SS	HY
	B	REVISED ECR-15-013494	18SEP15	KK	RK

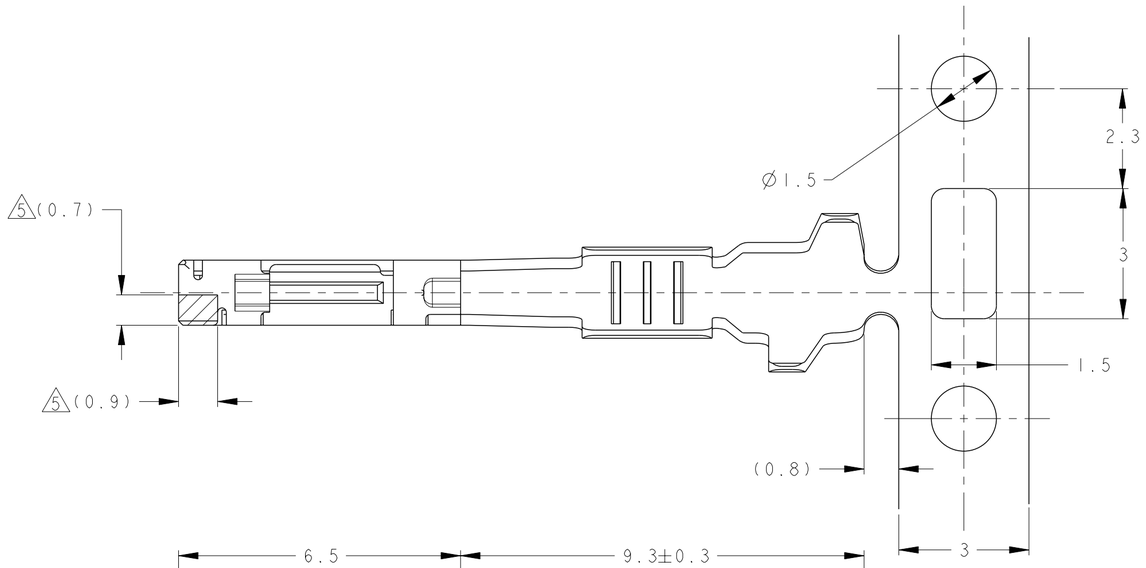





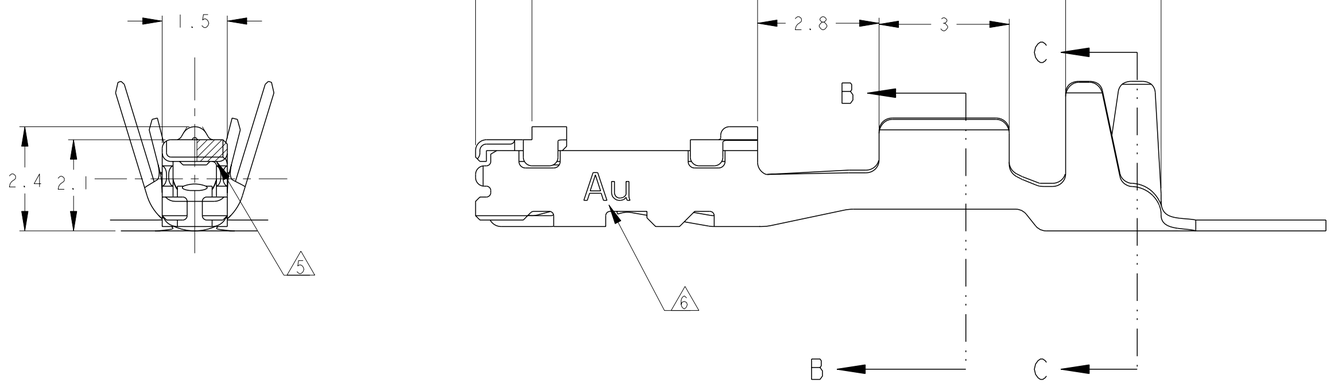

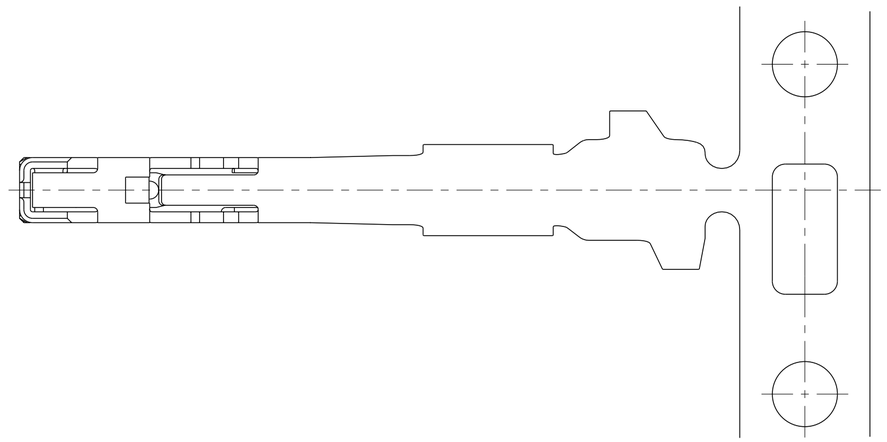

1. APPLICABLE WIRE RANGE;
   CHFUS 0.35mm^2
   AVSS/AVSSH/AVSSX/AESSX/CAVS 0.3mm^2
   CAN 0.22mm^2
2. APPLICATION SPEC;114-5336
3. APPLICATOR FEED;7.6mm.
4. TAB P/N;1612289

5. GOLD PLATED AREA FOR DISCRIMINATION.

6. MARKING FOR IDENTIFICATION.

1. 適用電線：
   CHFUS 0.35mm^2
   AVSS/AVSSH/AVSSX/AESSX/CAVS 0.3mm^2
   CAN 0.22mm^2
2. 取付適用規格：114-5336
3. アプリケータ送りピッチ：7.6mm
4. 適用TAB型番：1612289

5. 識別用金めっき範囲を示す。

6. 識別用刻印

5 6 SELECTIVE GOLD, TIN	1612290-2
PRE-TIN	1612290-1
FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位： 粍 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

一般公差	±0.2
0 PLC	±
1 PLC	±0.3
2 PLC	±0.10
3 PLC	±0.001
4 PLC	±0.0001
ANGLES	±3°00′

MATERIAL 材料: COPPER ALLOY

FINISH 仕上: SEE TABLE

DWN	S.SHISHIKURA 11MAY06
CHK	K.SAKAMAKI 11MAY06
APVD	S.ISOHATA 11MAY06
PRODUCT SPEC 製品規格	108-5891
APPLICATION SPEC 取付適用規格	114-5336
WEIGHT	0.16 g

TE Connectivity

NAME 名称: SEALED 0.64 RECEPTACLE CONTACT

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A2	00779	C-1612290	-

CUSTOMER DRAWING | SCALE 尺度 10:1 | SHEET 1 OF 1 | REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

1612290-2