





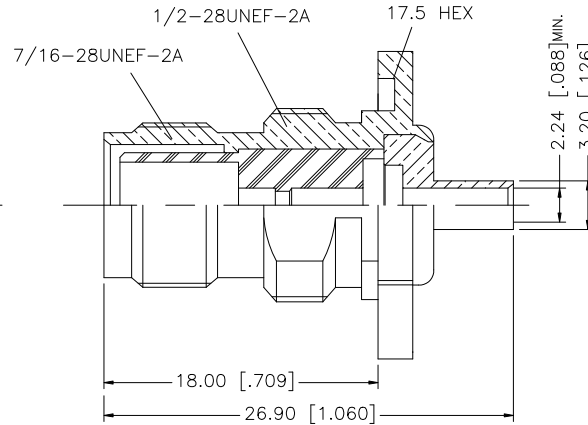
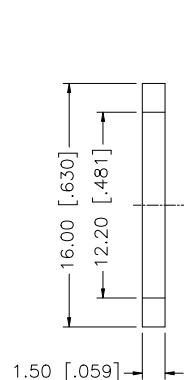


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/24/09	—	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

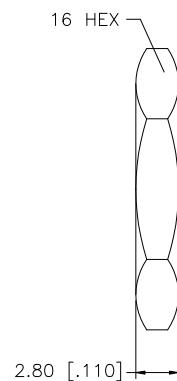

RECOMMENDED
MOUNTING HOLE

NOTE:

1. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]
2. MAX. PANEL THICKNESS= 3.5mm

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8	HEX NUT	BRASS	NICKEL	1	DRAWN		GRS	03/24/09		PART DESCRIPTION TNC REVERSE POLARITY BULKHEAD DIRECT SOLDER JACK (FOR .085”, .086” CABLE)					
7	LOCK WASHER	BRASS	NICKEL	1	CHECKED										
6	GASKET	RUBBER	RED	1	ISSUED										
5	INSULATOR	PTFE	NATURAL	1	SHEET		1 OF 1								
4	CONTACT PIN	BRASS	GOLD	1	PART NO. 122400RP-10										
3	INSULATOR	PTFE	NATURAL	1											
2	BARREL	BRASS	NICKEL	1											
1	BODY	BRASS	NICKEL	1	DWG. NO. 122400RP-10.DWG REV. NC SIZE A SCALE NA										
DESCRIPTION		MATERIAL	FINISH	QTY											

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122400RP-10](#)