
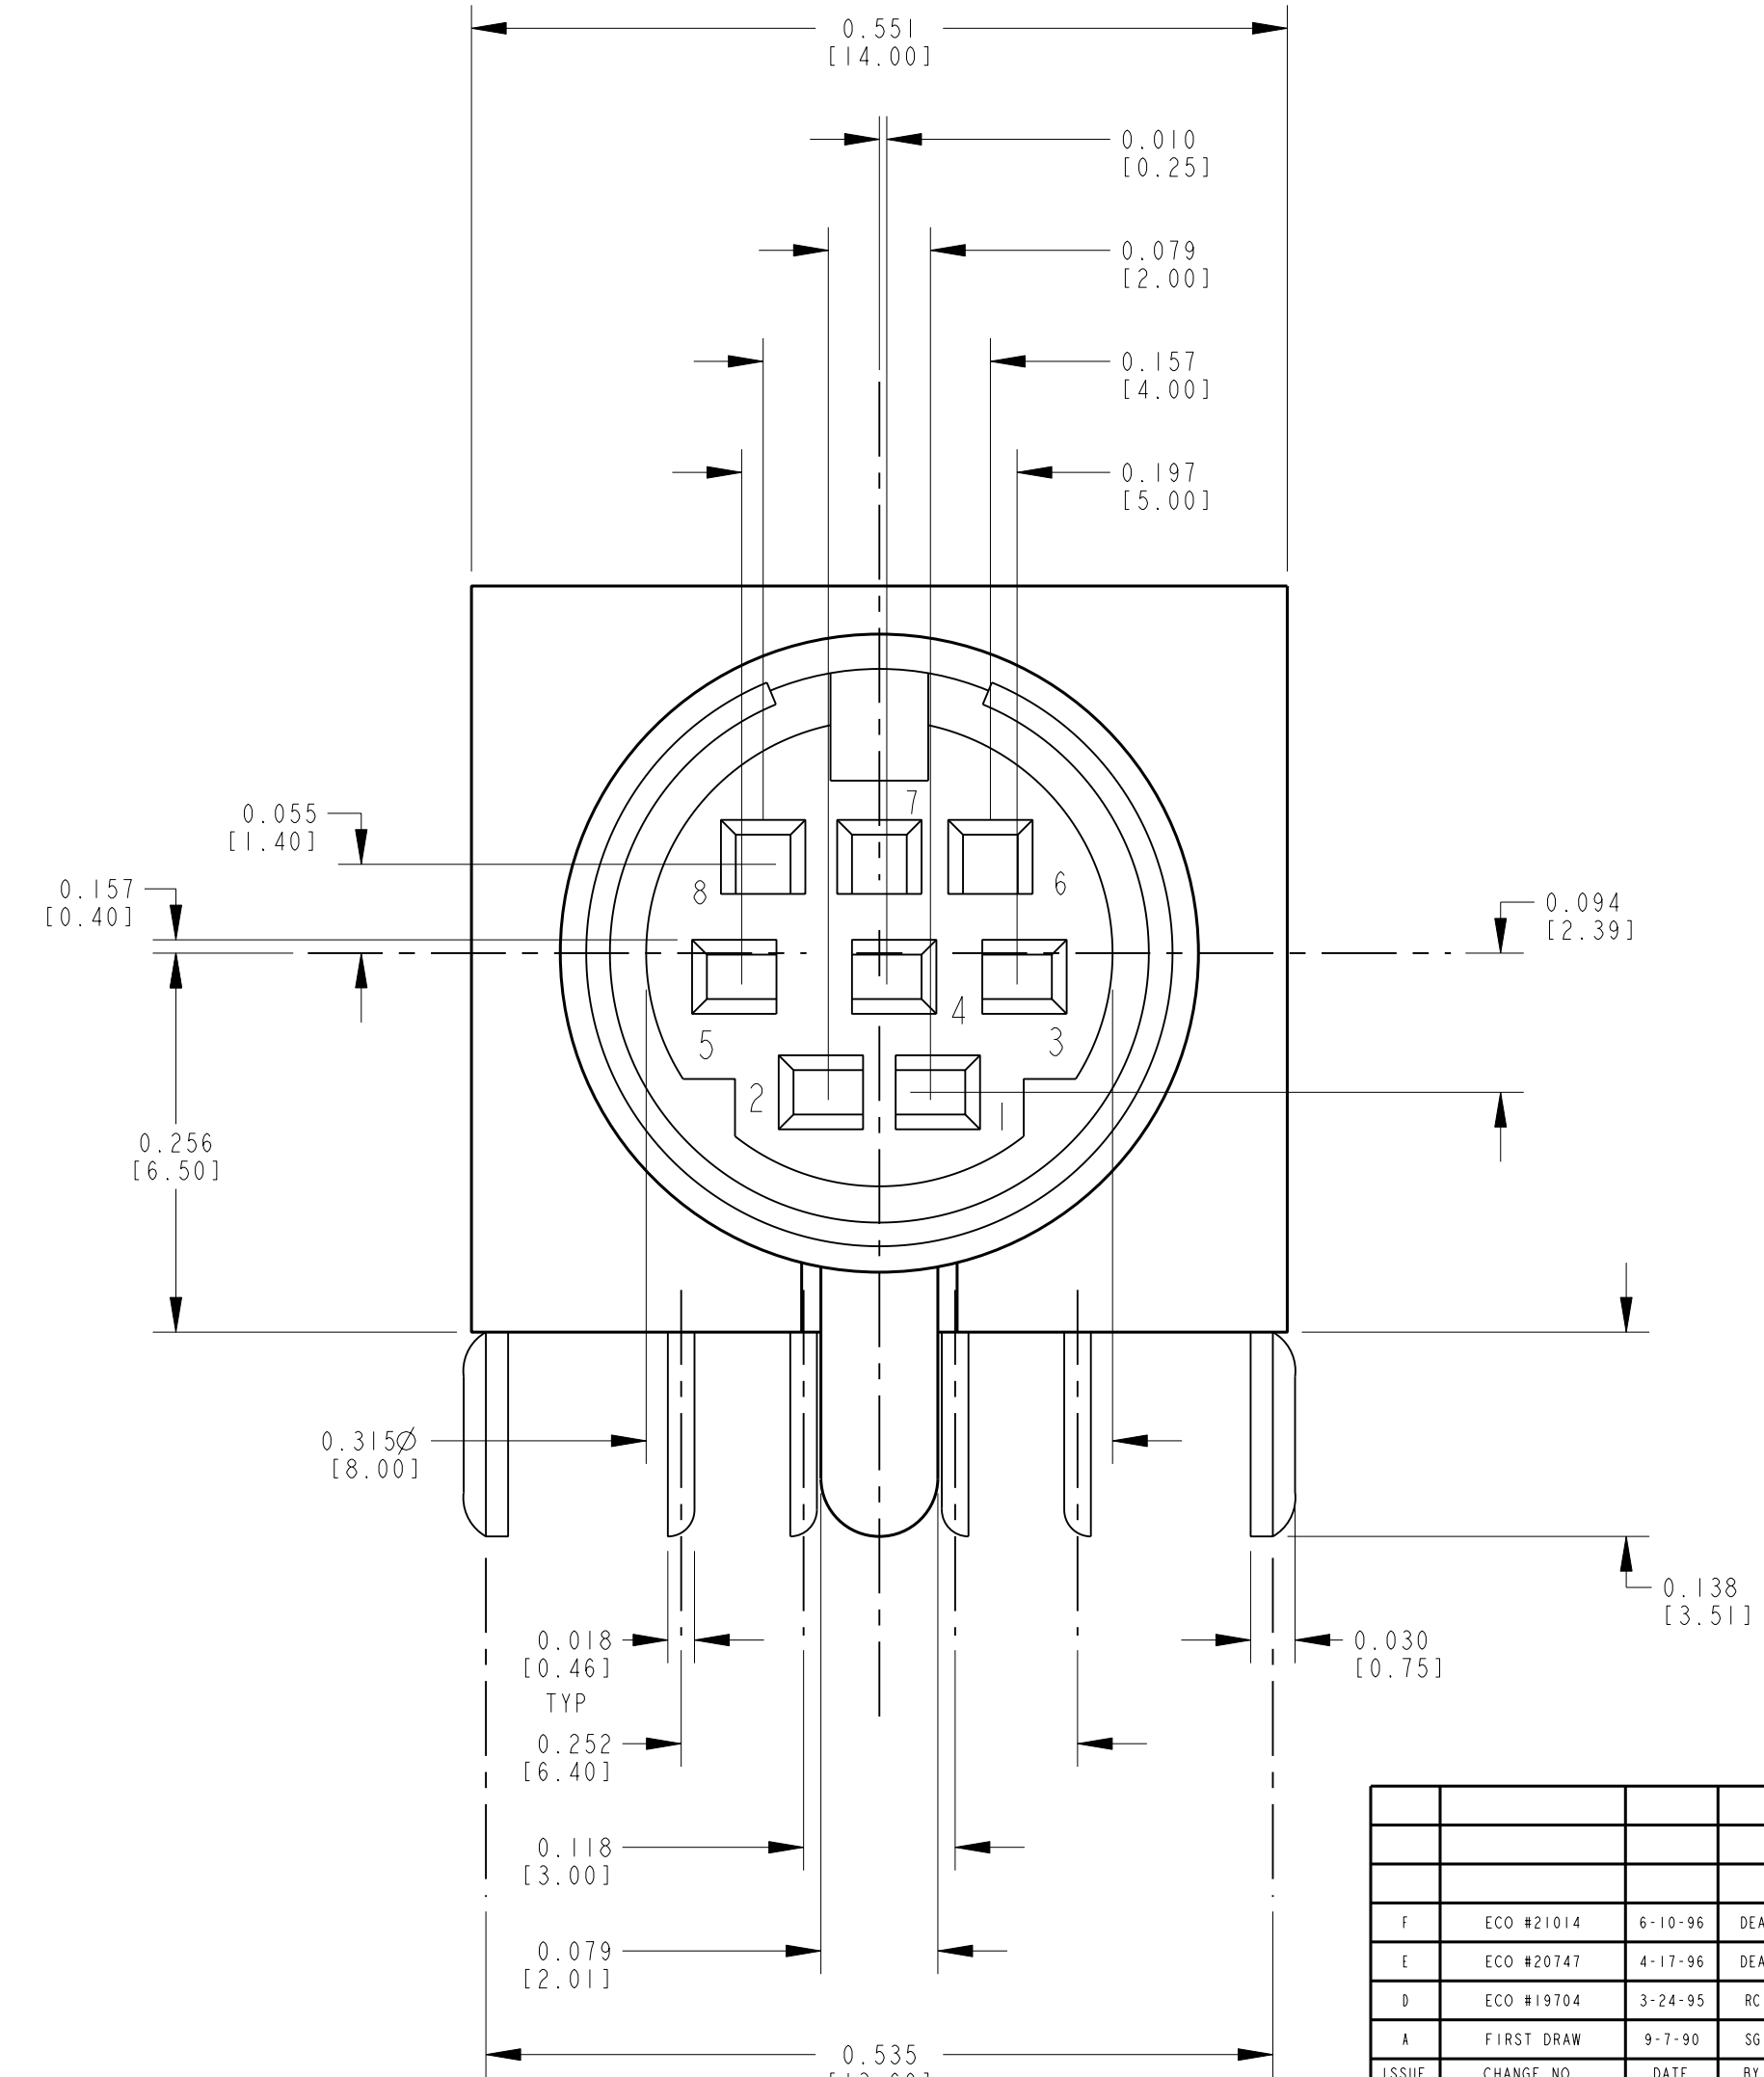
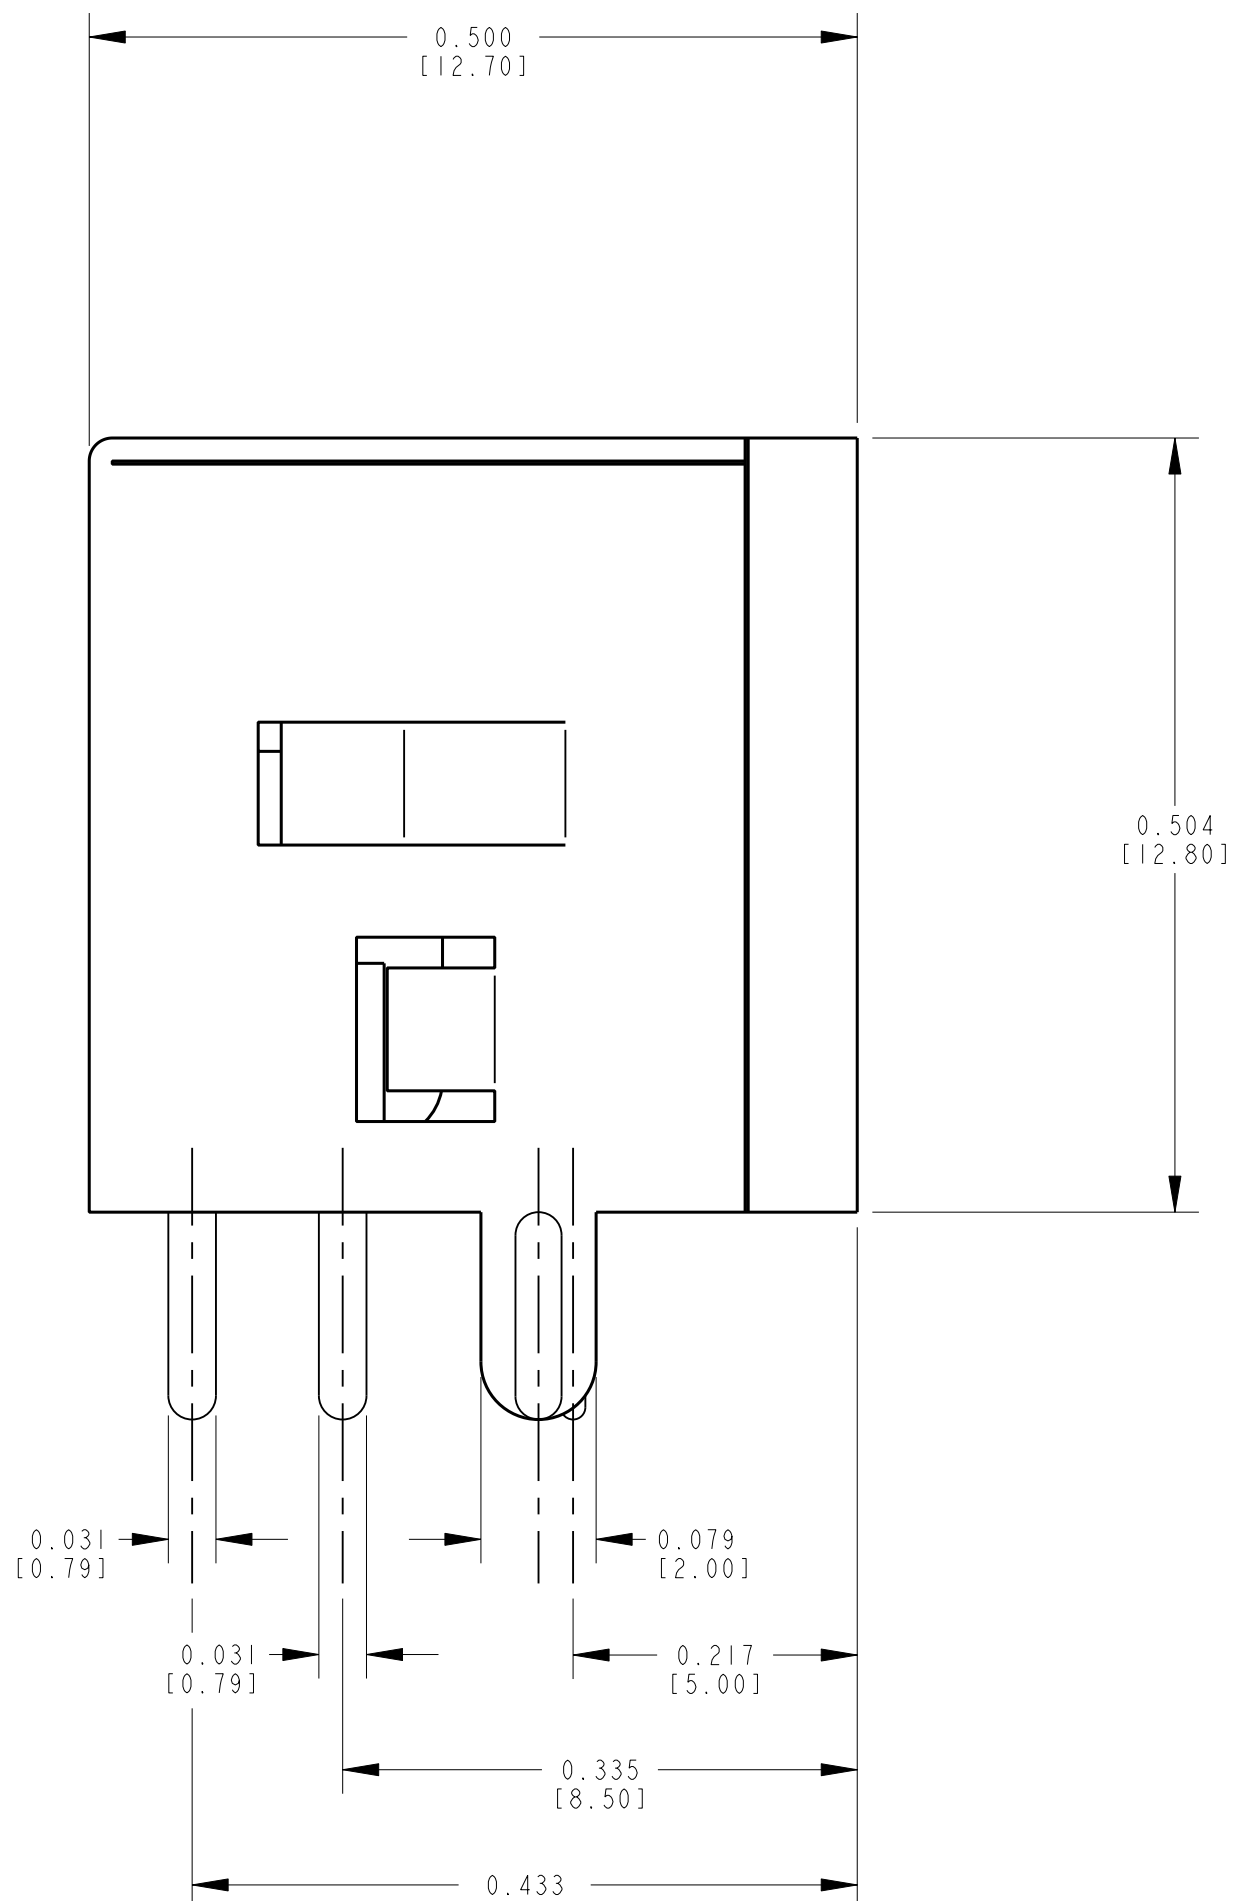


SWITCHCRAFT CATALOG PART NUMBER

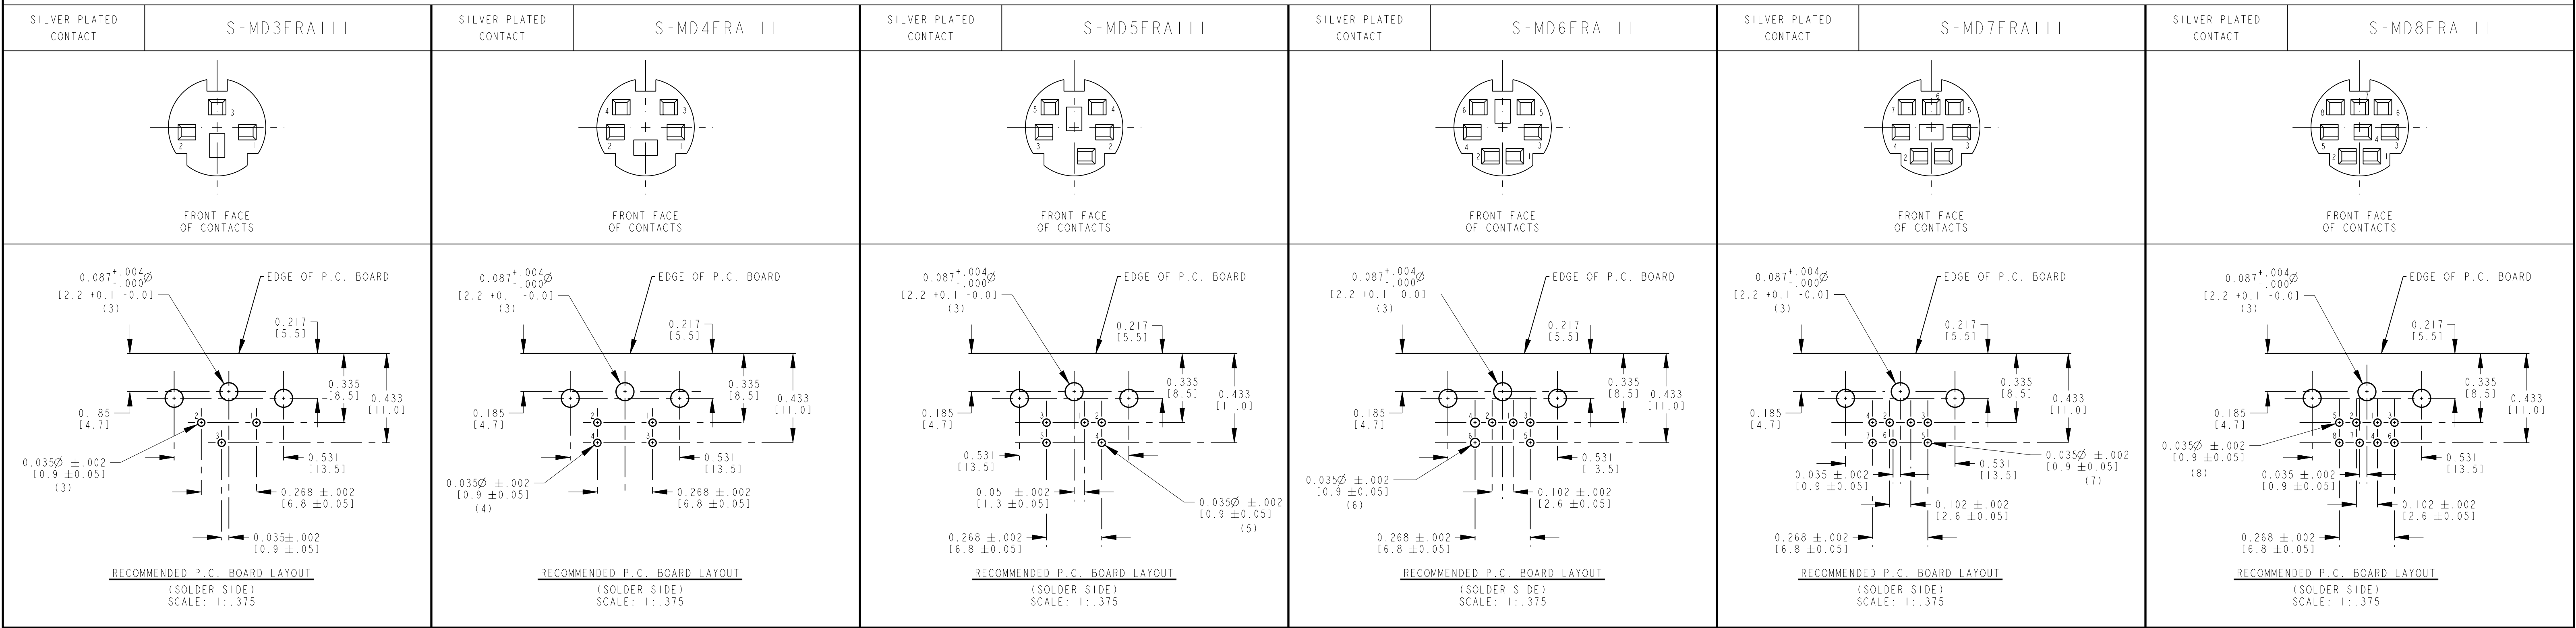

CURRENT CARRYING CAPACITY	
1A, 100V AC	
2A, 12V DC	
INSULATION RESISTANCE:	50M Ω MIN
DIELECTRIC STRENGTH:	250V DC/1 MINUTE
CONTACT RESISTANCE:	30m Ω MAX I
INSERTION FORCE:	0.8-5 KG / 1.76-11lb
EXTRACTION FORCE:	0.8-4 KG / 1.76-8.8lb

REVISIONS						UNLESS OTHERWISE SPECIFIED				STAR SYMBOL DENOTES CRITICAL DIMENSION. SEE S/C ENGINEERING STANDARD ES-0001				THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSE ONLY.			
REV	DATE	BY	APP'D	CHG	DESCRIPTION	SIZE	WIDTH	WLT	ISS./M	TEMPER	FINISH	SILVER PLATE	MATERIAL	SPEC. NO.	SCALE	NTS	APP'D
F	ECO #21014	6-10-96	DEA	KS													
E	ECO #20747	4-17-96	DEA	KS													
D	ECO #19704	3-24-95	RC	GHJ													
A	FIRST DRAW	9-7-90	SG	EB													
ISSUE	CHANGE NO.	DATE	BY	APP'D													
DO NOT SCALE DRAWING						NAME				MINI DIN				PART NO. SMD3/SMD8FRA111			
														ISSUE F			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Switchcraft:

[SMD3FRA111](#) [SMD5FRA111](#) [SMD6FRA111](#) [SMD7FRA111](#) [SMD8FRA111](#)