

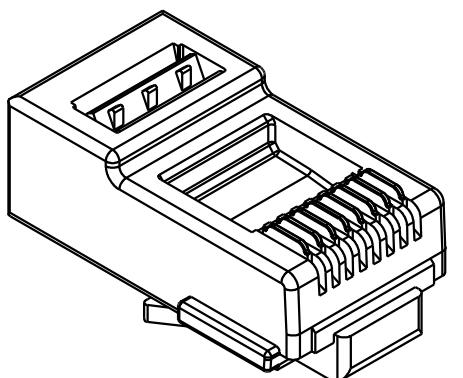
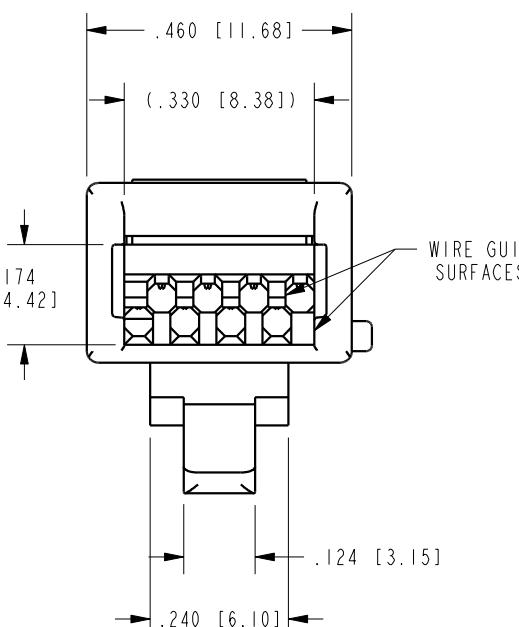
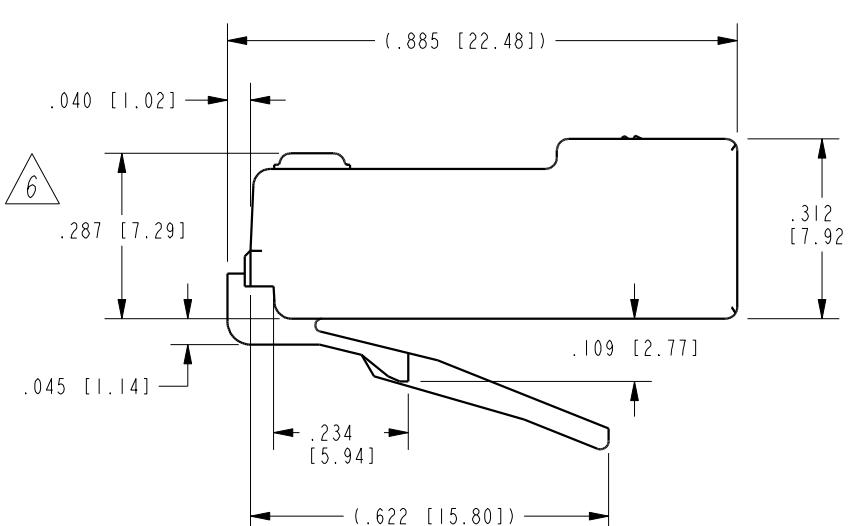



DATE	REV.	ECN	APP'D BY
2-17-15	A3	10258	ADB
3-1-16	A4	10578	TRM

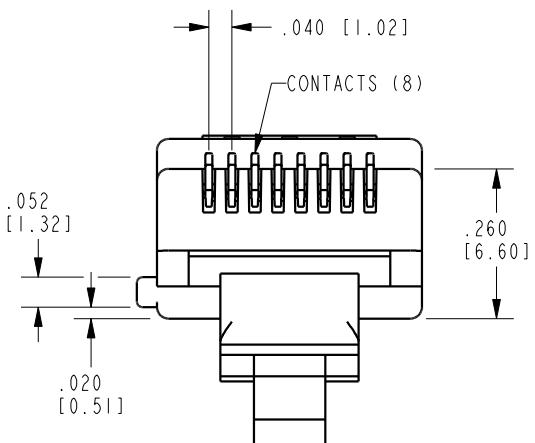


PLUG HOUSING  
SCALE 2.5

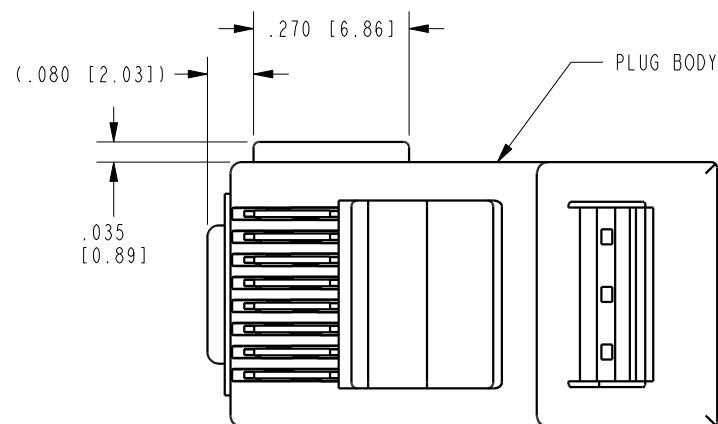

NOTES:  
1- PART CONSISTS OF:  
PRE-INSERTED PLUG BODY  
2- MATERIALS:  
FRONT HOUSING PLASTIC : CLEAR POLYCARBONATE, UL 94-V0  
CONTACTS : PHOSPHOR BRONZE, SELECTIVE GOLD PLATING  
3- CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN  
.042 [1.07] TO .048 [1.22] OUTSIDE DIAMETER OF INSULATION  
4- DESIGNED FOR CATEGORY 5/5e APPLICATIONS.  
5- DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.  
6- TERMINATED PLUG HEIGHT: .237 [6.02] ±.005 [0.13]  
7. FOR PRODUCT SPECIFICATION SEE PR026-01.

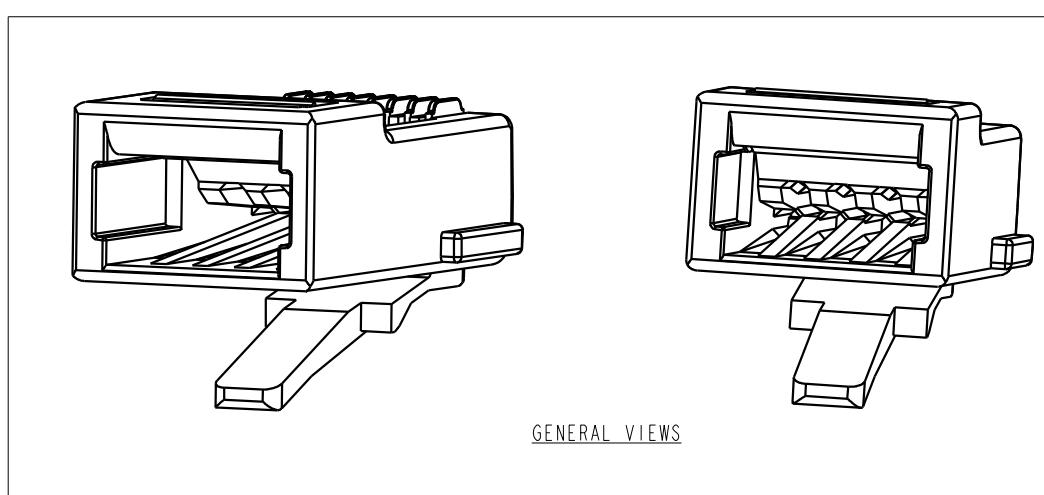

BULK	50 MICRO-INCHES [1.27um]	SS-37000-010
PACKAGE	CONTACT PLATING IN MATING AREA	PART NUMBER




DO NOT SCALE DRAWING  
DRAWING IS SUBJECT TO  
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED  
TOLERANCES ARE ±.005 [0.13]  
ANGLES ARE ±1°

SHEET NO.  
1 OF 1



**stewart**  
CONNECTOR  
a bel group

1118 Susquehanna Trail South  
Glen Rock, PA 17327-9199  
(717) 235-7512  
<http://www.stewartconnector.com>

UNSHIELDED CAT 5e PLUG  
WITH K1 KEY OPTION

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON  
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF  
STEWART CONNECTOR AND SHALL NOT BE REPRODUCED,  
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN  
CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS  
MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE  
VISIT: [HTTP://BELFUSE.COM/STEWART/STEWART\\_PATENTS/](http://BELFUSE.COM/STEWART/STEWART_PATENTS/)

DRN BY: TRM DATE 10-31-06

APPD BY: DHG DATE 10-31-06

DWG. NO. CT370060 REV. A4

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bel:](#)

[SS-37000-010](#)