

21EN187

REPLACES

RELEASE NO. SR-12235

M

DRAWING
NUMBER

ISSUE

0

CHECK

REVISIONS

A	C044351
D J W	25 OCT 79
B	C047573 PART 4
R J H	12 AUG 80
C	C064501
TSK	25 OCT 88

CHECK

30 OCT 79

CHECK

CEB

CHECK


FO-52851-A

DRAWN



D J W

25 OCT 79

1.0 DIA



ROLLER GUIDE MAY BE LOCKED IN
INCREMENTS OF 45° AZIMUTH. IT MAY
ALSO BE UNSCREWED AND REMOVED
FROM BUSHING TO FACILITATE
INSTALLATION **3**

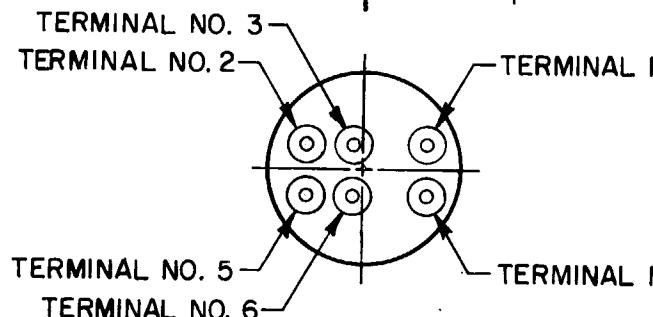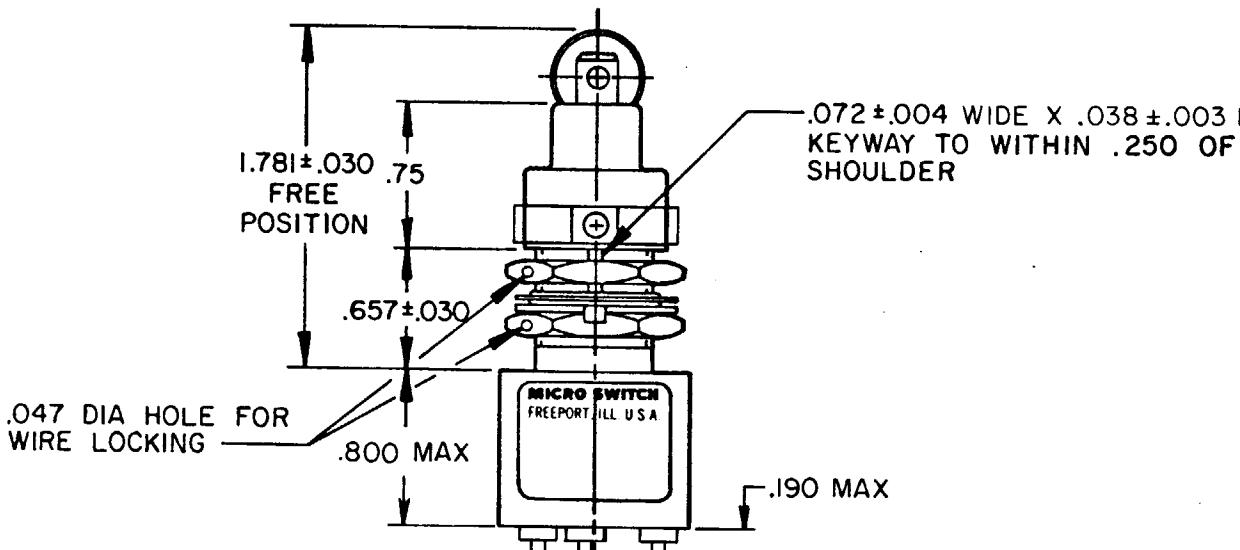

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY
OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT
TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE, UNLESS NOTED. TOLERANCES ARE \pm

	IN.	TOL.	IN.	TOL.
NO PLACES	X	.17.00	X	.01.00
ONE PLACE	X	.04.018	X	.00.005
TWO PLACES	X .XX	.01.000	X .XX	.00.005
THREE PLACES	X .XXX	.00.000	X .XXX	.00.005
ANGLES				


SI METRIC US CUSTOMARY

DESIGN UNITS


RAW MATERIAL-COMMERCIAL STANDARD
MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT 4.0 OZ MAX

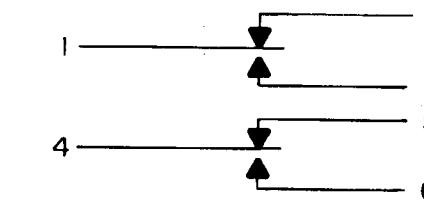

CIRCUIT DIAGRAM

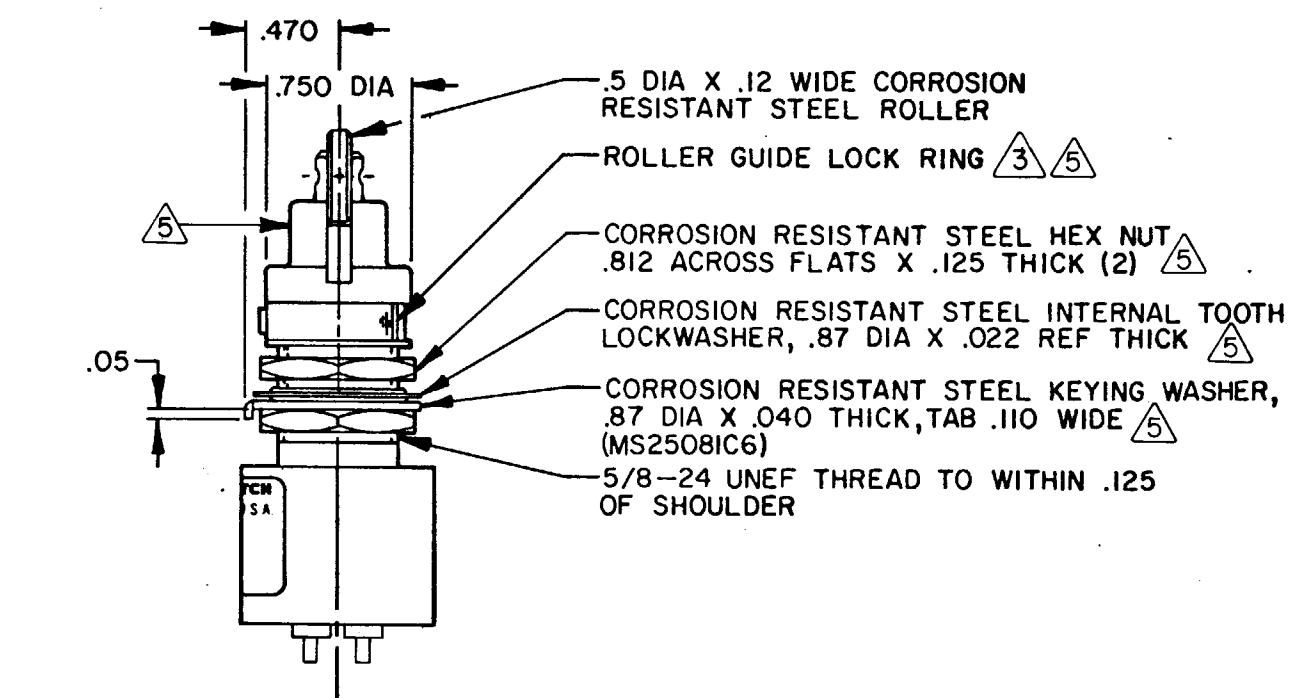

NOTES

1 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
2 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010
OF PLUNGER TRAVEL

3 TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING

4 CIRCUIT DIAGRAM AND CAT. LIST. ARE SHOWN ON NAMEPLATE
5 HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[21EN187](#)