
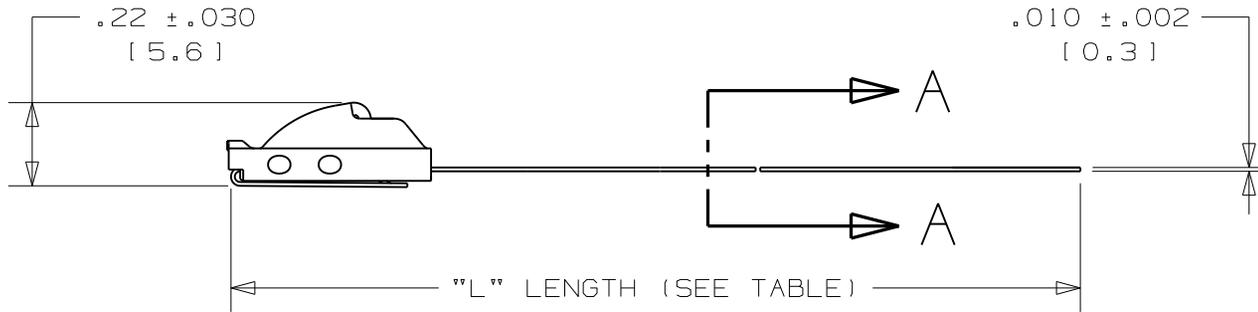



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY.	MAX BUNDLE DIA	LENGTH L ±.2 [5]
MLT2DH-L	50	2" [ 50 ]	18.5" [ 470 ]
MLT4DH-L	50	4" [ 101 ]	28.0" [ 711 ]
MLT5DH-L	50	5" [ 127 ]	34.0" [ 863 ]
MLT6DH-Q	25	6" [ 152 ]	40.0" [ 1016 ]

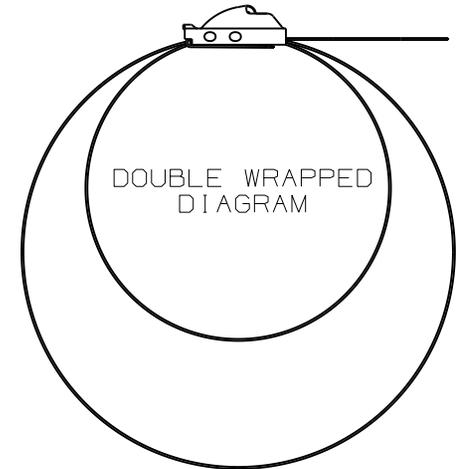

BODY WRAPS AROUND TWO TIMES ENTERING HEAD TWICE (NOT TO SCALE)

- NOTES:
1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, AND HTMT
  2. MINIMUM LOOP TENSILE STRENGTH - 600 LBS. (2669 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
  3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
  4. TOLERANCES:  
 .XXX = ±.010 [ .25 ]    .XX = ±.02 [ .5 ]  
 .X = ±.03 [ .8 ]        ANGLES = ±2°
  5. MATERIAL: 304 STAINLESS STEEL

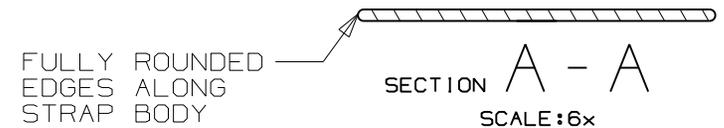

04A	2/12	MIM	RGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY
REV	DATE	BY	CHK	DESCRIPTION

**PANDUIT**

CORP.

TINLEY PARK, ILLINOIS

DOUBLE WRAPPED METAL LOCKING TIE  
HEAVY SERIES -304 STAINLESS STEEL

DRAWN BY JAMB	CHK'D DPN	SCALE 2x	DRAWING NO. N41142BS_DC
------------------	--------------	-------------	----------------------------

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[MLT4DH-L](#) [MLT6DH-Q](#) [MLT5DH-L](#) [MLT2DH-L](#)