

REV. 0

DCO 142582

TOL ± .010 UNLESS OTHERWISE SPECIFIED


COIL: @ 25°C	
RESISTANCE	210 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	5.4 VDC
MUST RELEASE	3.2 VDC MAX, 0.6 VDC MIN.

ENVIRONMENT:

VIBRATION	10	CPS TO	3000	CPS @	30	g's
SHOCK	75	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 4 MS MAX.  
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

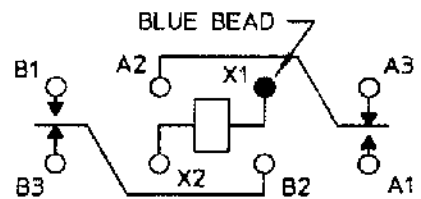

TERMINAL VIEW

CONTACT RATING: \_\_\_\_\_

DR. PBB 1/3/01 CK 1/3/01



CUST. QPL  
CUST. NO. M39016/13-065P REV.

'3SBC' RELAY

3SBC2010A2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SBC2010A2](#)