

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT



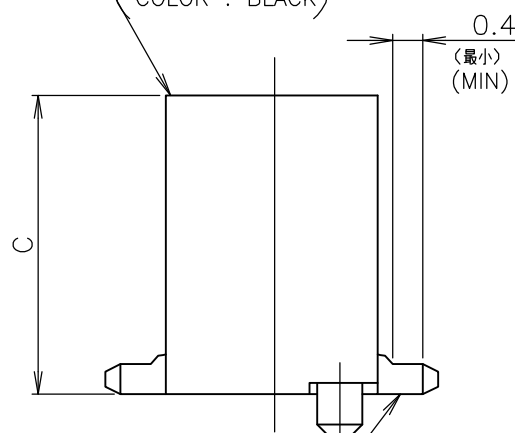
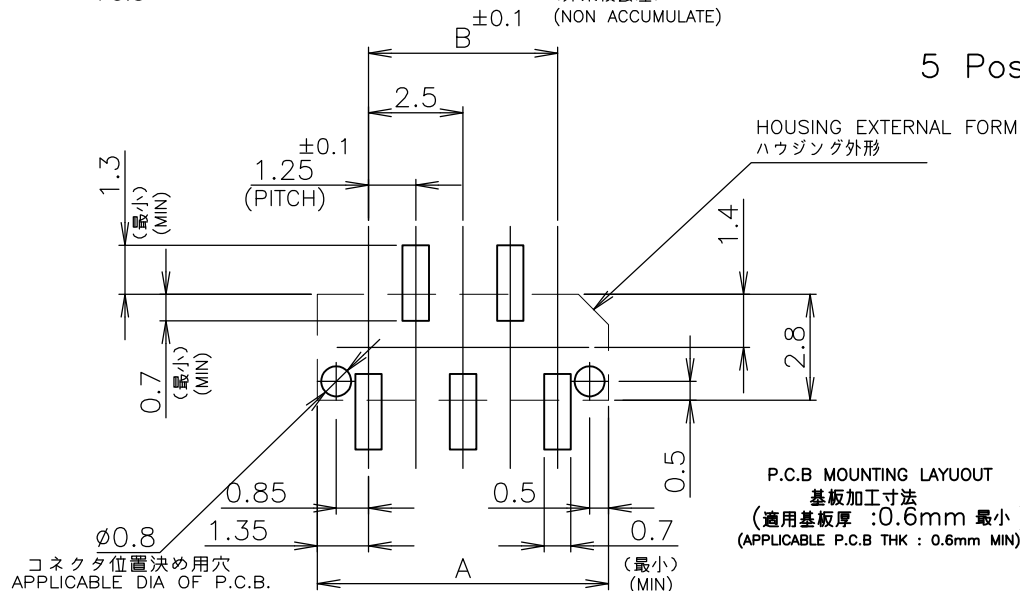
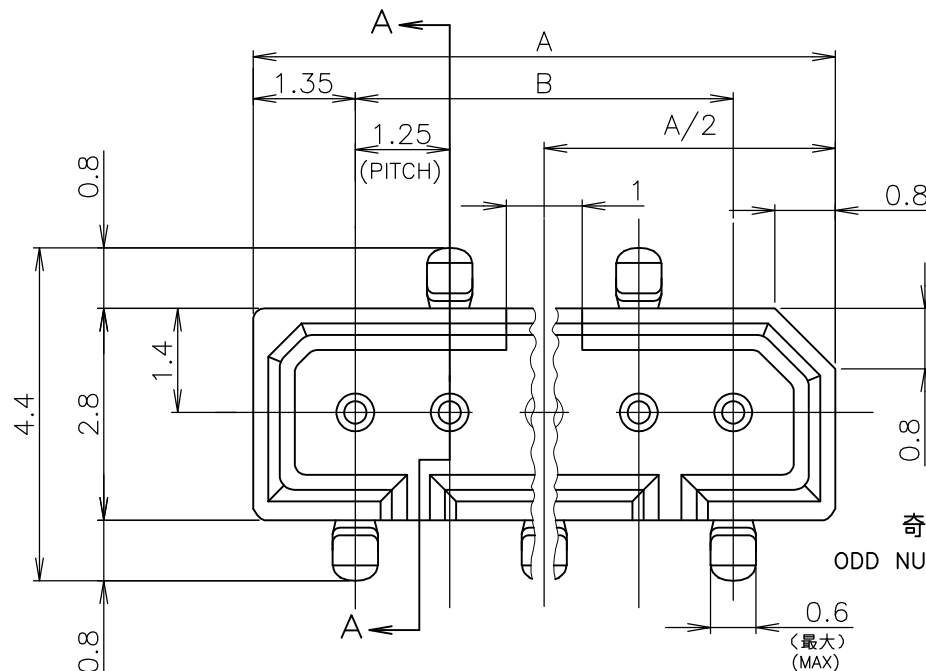

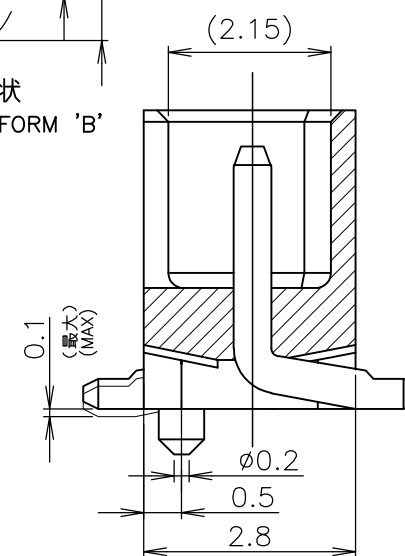
By --

ALL RIGHTS RESERVED.

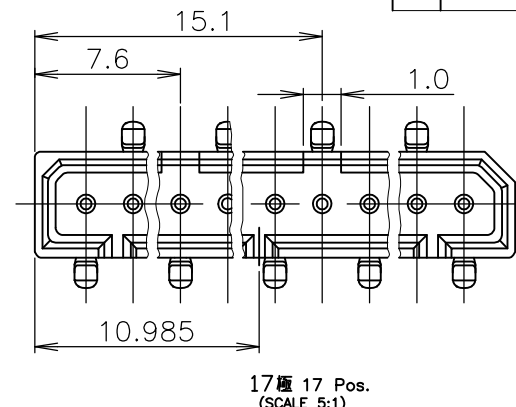
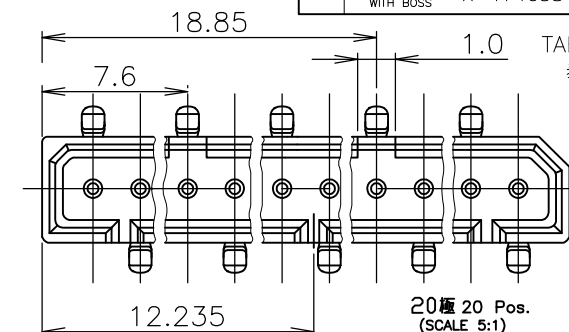

REVISIONS

変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
	M	REVISED PER ECR-16-011657	16AUG2016	WL	SY

HEADER HOUSING
ヘッダーハウジング(PPS UL94V-0)
COLOR : BLACKPOST
ポストニッケル下地 錫めっき仕上げ黄銅線
POST TIN PL.
(Ni UNDER PL. ALL OVER BRASS WIRE)
φ0.5(非累積公差)
(NON ACCUMULATE)5極以上10極以下
5 Pos.AND MORE,10 Pos>AND LESSP.C.B MOUNTING LAYOUT
基板加工寸法
(適用基板厚 : 0.6mm 最小)
(APPLICABLE P.C.B THK : 0.6mm MIN)奇数極5,7極
ODD NUMBER Pos.5,7 Pos.ボス形状
BOSS FORM 'B'ボス形状
BOSS FORM 'A'


SECT A-A

17極 17 Pos.
(SCALE 5:1)TABLE 1
表-1SMT TYPEは、巾及び高さ寸法に
SMT TYPE INCLUDE DIMENSIONS
半田付タイプ寸法を含みます。
OF SOLDER DIP TYPE.

V TYPE H TYPE

		↑	25.45	↑	23.75	26.45	20	8-	↑	-0
REACTIVE			21.70		20.00	22.70	17	7-		-7
△ OBSOLETE	'A'		10.45	5.95	8.75	11.45	8	6-		-8
	'B'		12.95	↑	11.25	13.95	10	4-		-0
	↑		10.45		8.75	11.45	8	3-		-8
	'A'		9.20		7.50	10.20	7	3-		-7
	↑		7.95		6.25	8.95	6	3-		-6
			6.70		5.00	7.70	5	3-		-5
	'B'		5.45	3.95	3.75	6.45	4	3-	174820-4	
ボス形状 BOSS TYPE	D	C	B	A	極数 Pos.	型番 P/N				

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 珪
mmTOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差MATERIAL
材料
AS SHOWN
図中参照0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±FINISH
仕上
AS SHOWN
図中参照

DWN S.KANEKI 14SEP92

CHK J.TANIGAWA 14SEP92

APVD S.KUBOURCHI 17OCT92

PRODUCT SPEC

製品規格

108-5246

APPLICATION SPEC

取付適用規格

WEIGHT 0.000000

CUSTOMER DRAWING

STE

TE Connectivity

NAME
名称1.25 FP CONNECTOR (B-TO-B)
SINGLE ROW POST HDR ASS'Y SMT TYPE WITH BOSS

SIZE

CAGE CODE

DRAWING NO
番号

RESTRICTED TO

A300779

C-174820

SCALE
尺度 10:1

SHEET

1 OF 1

REV
M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-174820-6](#)