



LOC	DIST	REVISIONS				
IS	-	P	LTR	DESCRIPTION	DATE	APVD
			A	Released to production	08.11.2006	MS

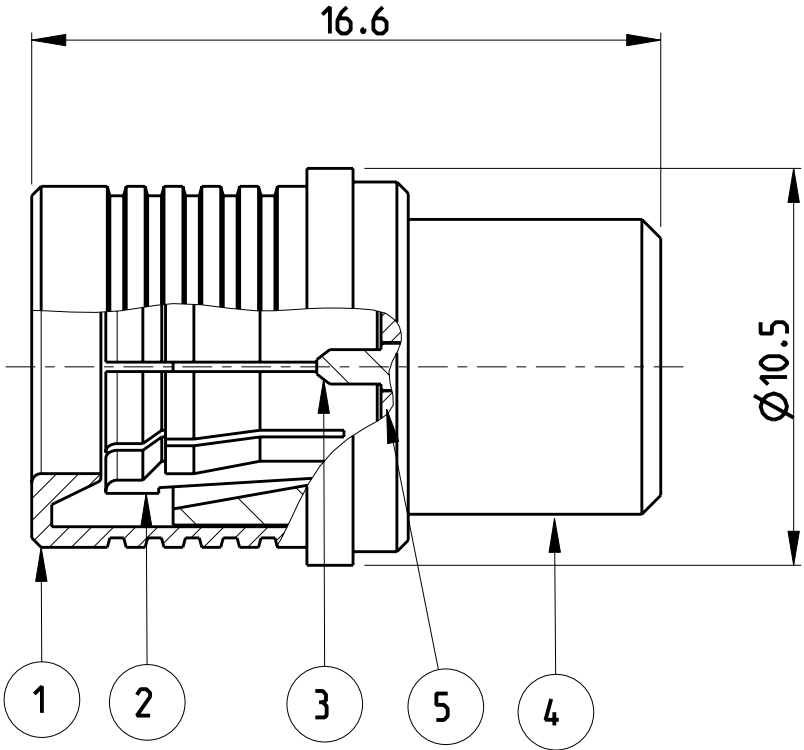


- 1

General tolerances acc. to ISO 2768-mH
- 2

Bulk packaging
- 3) CHARACTERISTIC IMPEDENCE 50 Ohm

619271-1 2	5	Dielectric	PTFE	None	1
	4	Housing	Brass	min. 0.15 µm Au over min. 2 µm NiP over min. 0.2 µm Cu	1
	3	Center conductor	Brass	min. 0.15 µm Au over min. 2 µm NiP over min. 0.2 µm Cu	1
	2	Outer conductor	CuBe/Bronze	min. 0.2 µm Au over min. 2 µm NiP over min. 0.5 µm Cu	1
	1	Release ring	Bronze/Brass	min. 2 µm CuSnZn alloy over min. 0.2 µm Cu	1
Part Nr	Item	Description	Material	Plating	Qty

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN R.Luppi	01JUN2006	tyco Electronics		tyco Electronics		
		CHK D.Bozzer	01JUN2006			Switzerland - Lugano		
DIMENSIONS: mm		APVD -	-	NAME QMA Plug Terminator				
		PRODUCT SPEC -						
MATERIAL -		APPLICATION SPEC -		SIZE A3		CAGE CODE 00779	DRAWING NO G-619271	RESTRICTED TO -
		WEIGHT -		CUSTOMER DRAWING		SCALE 5:1	SHEET 1	OF 1



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[619271-1](#)