


1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
ALL OVER 0.00127 [.000050] NICKEL ENTIRE POST.

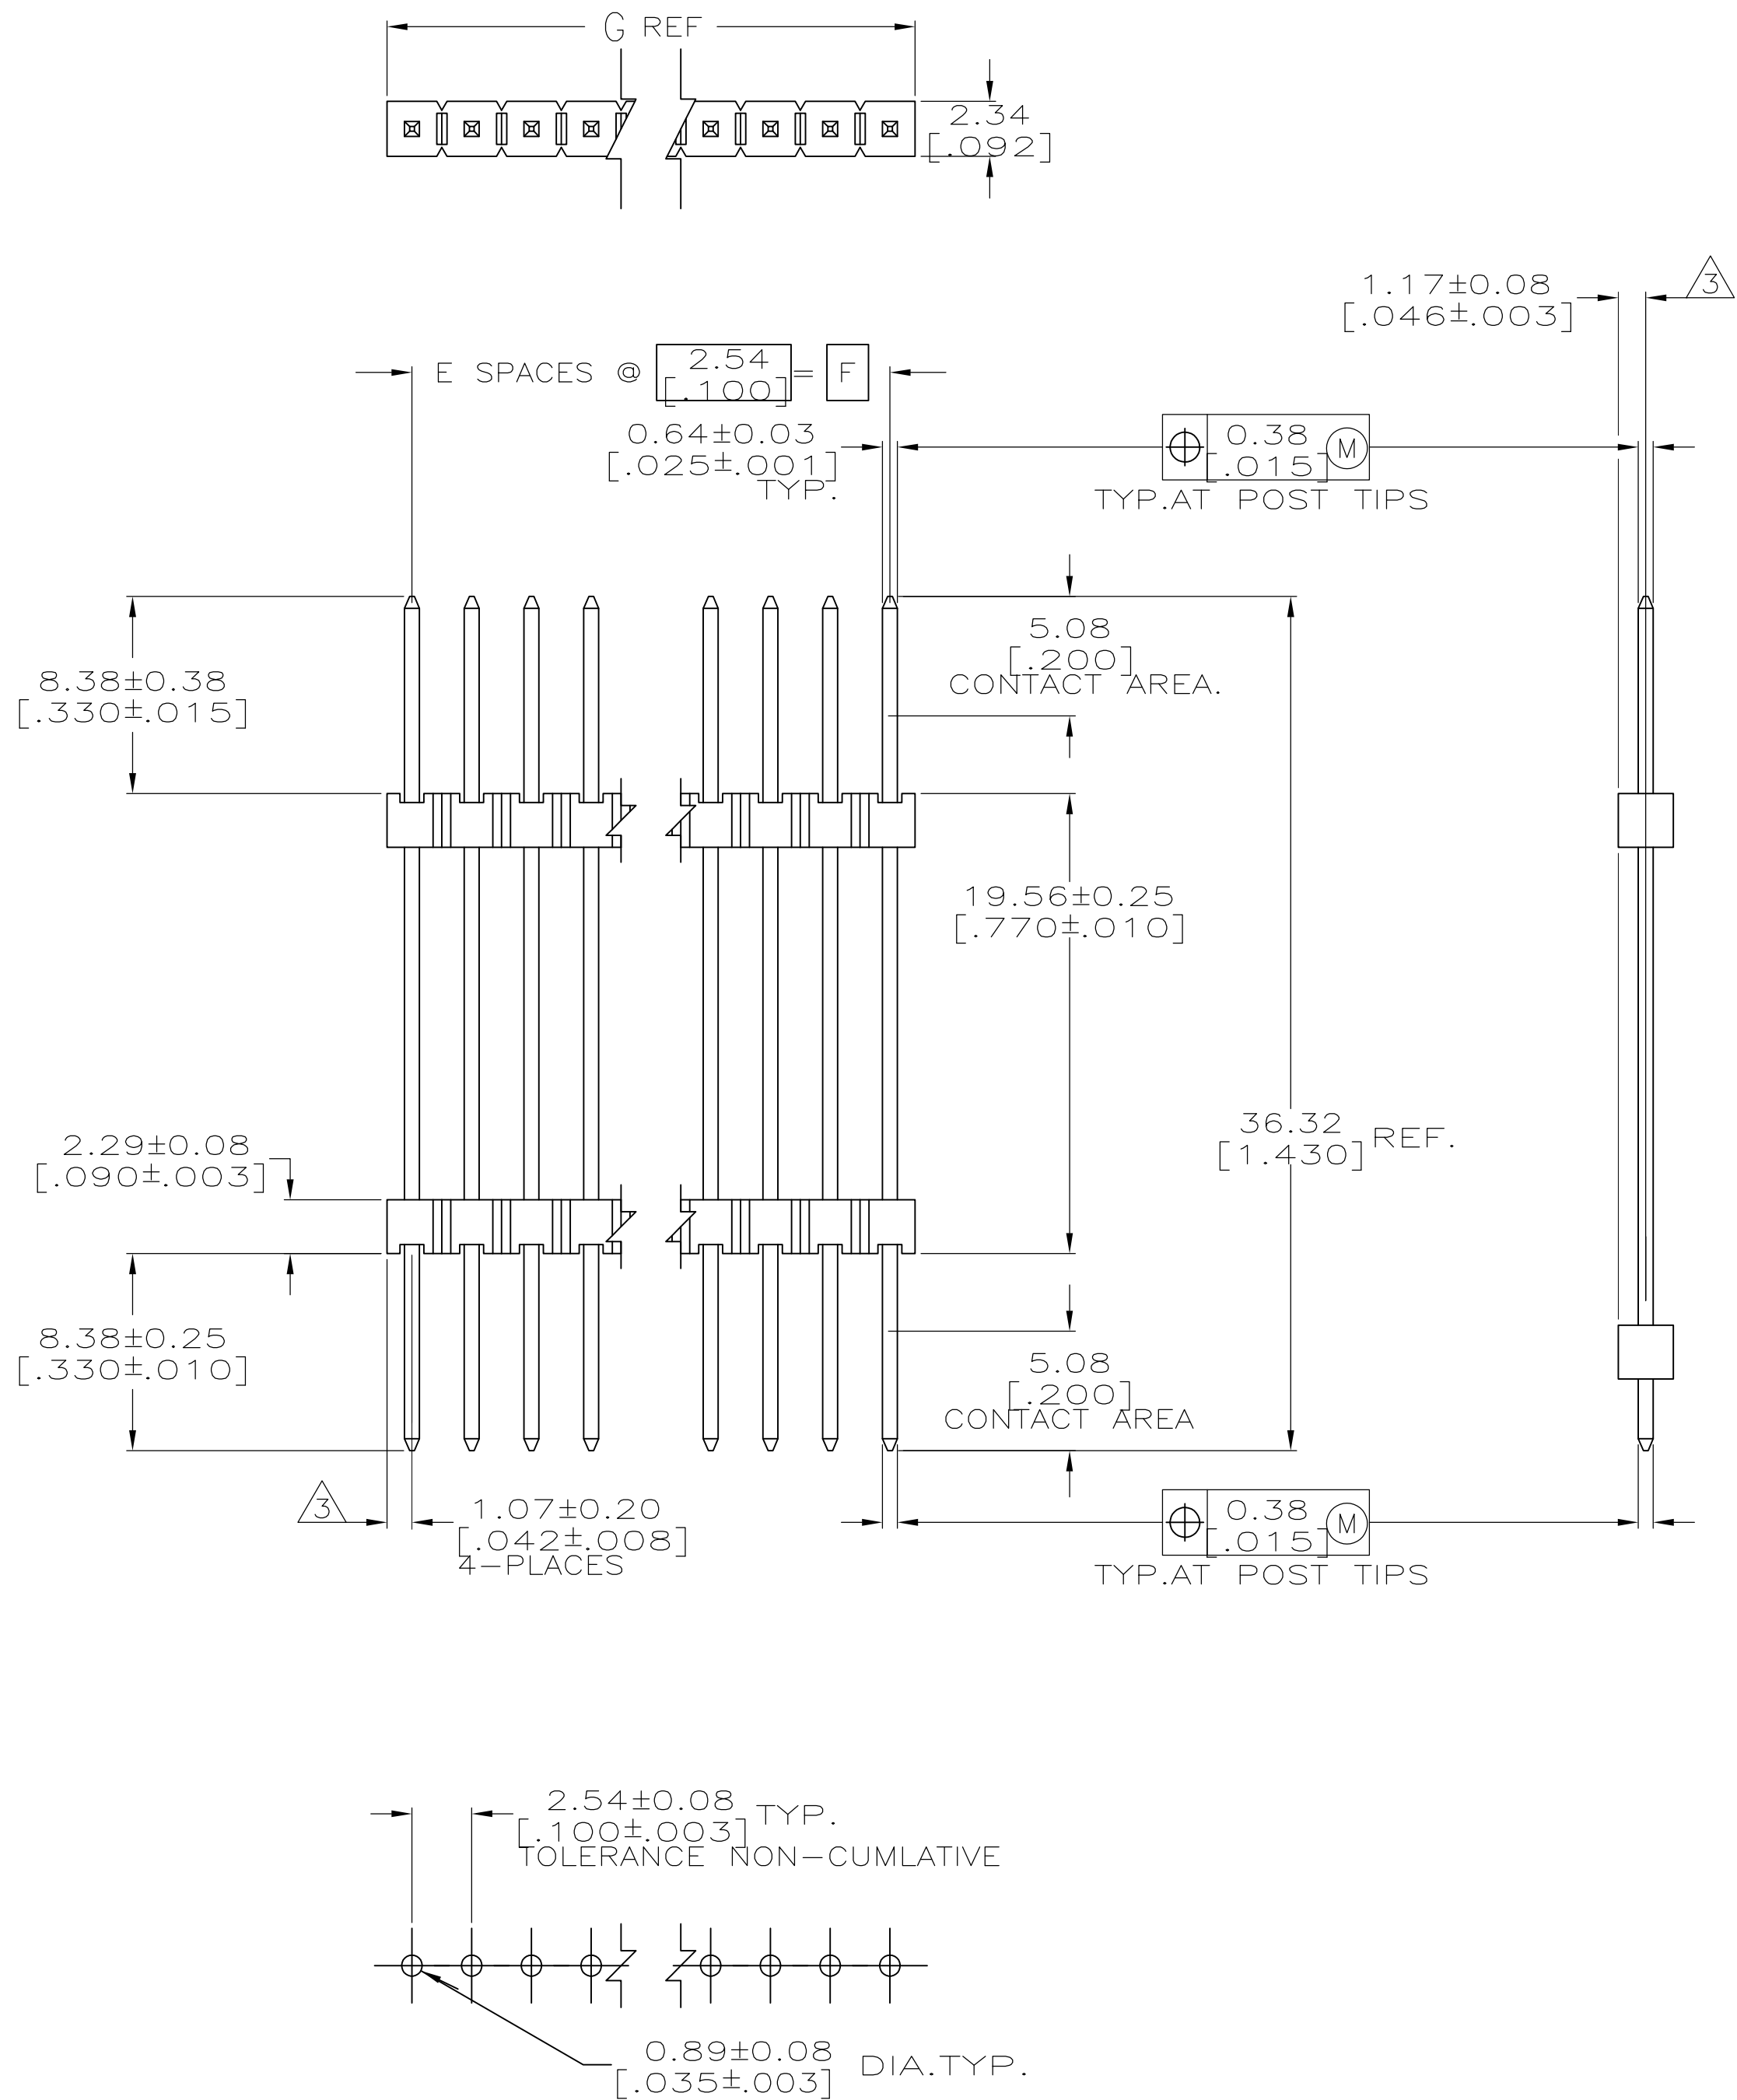

RECOMMENDED HOLE LAYOUT

99.06	39	40	4-146482-0
[3.984] [3.900]			
98.65	38	39	3-146482-9
[3.884] [3.800]			
96.11	37	38	3-146482-8
[3.784] [3.700]			
93.57	36	37	3-146482-7
[3.684] [3.600]			
91.03	35	36	3-146482-6
[3.584] [3.500]			
88.49	34	35	3-146482-5
[3.484] [3.400]			
85.95	33	34	3-146482-4
[3.384] [3.300]			
83.41	32	33	3-146482-3
[3.284] [3.200]			
80.87	31	32	3-146482-2
[3.184] [3.100]			
78.33	30	31	3-146482-1
[3.084] [3.000]			
75.79	29	30	3-146482-0
[2.984] [2.900]			
73.25	28	29	2-146482-9
[2.884] [2.800]			
70.71	27	28	2-146482-8
[2.784] [2.700]			
68.17	26	27	2-146482-7
[2.684] [2.600]			
65.63	25	26	2-146482-6
[2.584] [2.500]			
63.09	24	25	2-146482-5
[2.484] [2.400]			
60.55	23	24	2-146482-4
[2.384] [2.300]			
58.01	22	23	2-146482-3
[2.284] [2.200]			
55.47	21	22	2-146482-2
[2.184] [2.100]			
52.93	20	21	2-146482-1
[2.084] [2.000]			
50.39	19	20	2-146482-0
[1.984] [1.900]			
47.85	18	19	1-146482-9
[1.884] [1.800]			
45.31	17	18	1-146482-8
[1.784] [1.700]			
42.77	16	17	1-146482-7
[1.684] [1.600]			
40.23	15	16	1-146482-6
[1.584] [1.500]			
37.69	14	15	1-146482-5
[1.484] [1.400]			
35.15	13	14	1-146482-4
[1.384] [1.300]			
32.61	12	13	1-146482-3
[1.284] [1.200]			
30.07	11	12	1-146482-2
[1.184] [1.100]			
27.53	10	11	1-146482-1
[1.084] [1.000]			
24.99	9	10	1-146482-0
[.984] [.900]			
22.45	8	9	146482-9
[.884] [.800]			
19.91	7	8	146482-8
[.784] [.700]			
17.37	6	7	146482-7
[.684] [.600]			
14.83	5	6	146482-6
[.584] [.500]			
12.29	4	5	146482-5
[.484] [.400]			
9.75	3	4	146482-4
[.384] [.300]			
7.21	2	3	146482-3
[.284] [.200]			
4.67	1	2	146482-2
[.184] [.100]			
2.13	-	1	146482-1
[.084] -	-		
G	F	E	NO. OF POSITIONS
			PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.						DWG 14-MAR-97			TE Connectivity				
						CHK G. DUBNICZKI	14-MAR-97						
						APPV G. DUBNICZKI	14-MAR-97						
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED							
		0 PLOC ± .		PRODUCT SPEC		APPLICATION SPEC							
		2 PLOC ± .											
		2 PLOC ± 0.01[.003]		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
		0.01[0.015][.003]											
		4 PLOC ± 0.012[.005][.0005]		WEIGHT		A1		00779		146482			
		ANGLES ± .											
MATERIAL		FINISH		CUSTOMER DRAWING		SCALE		4:1		SHEET	1 OF 1	REV	P

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-146482-5](#)