

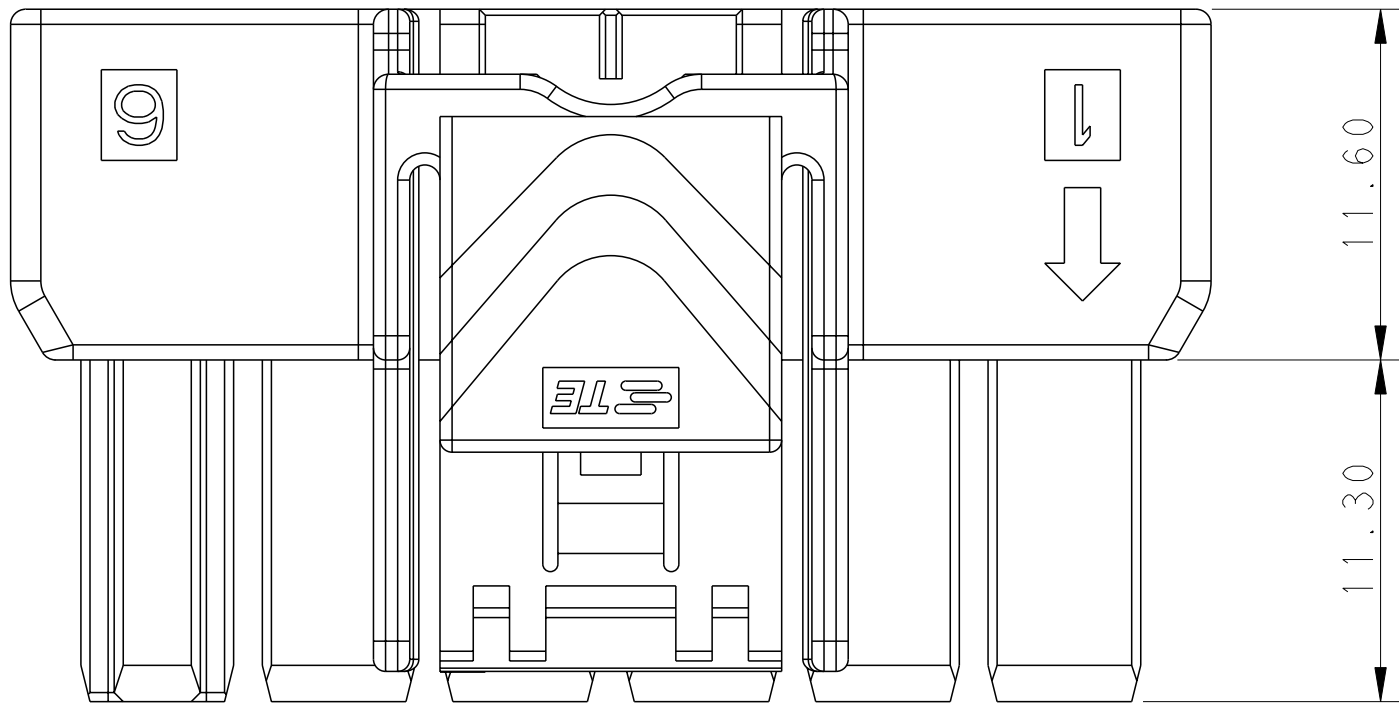
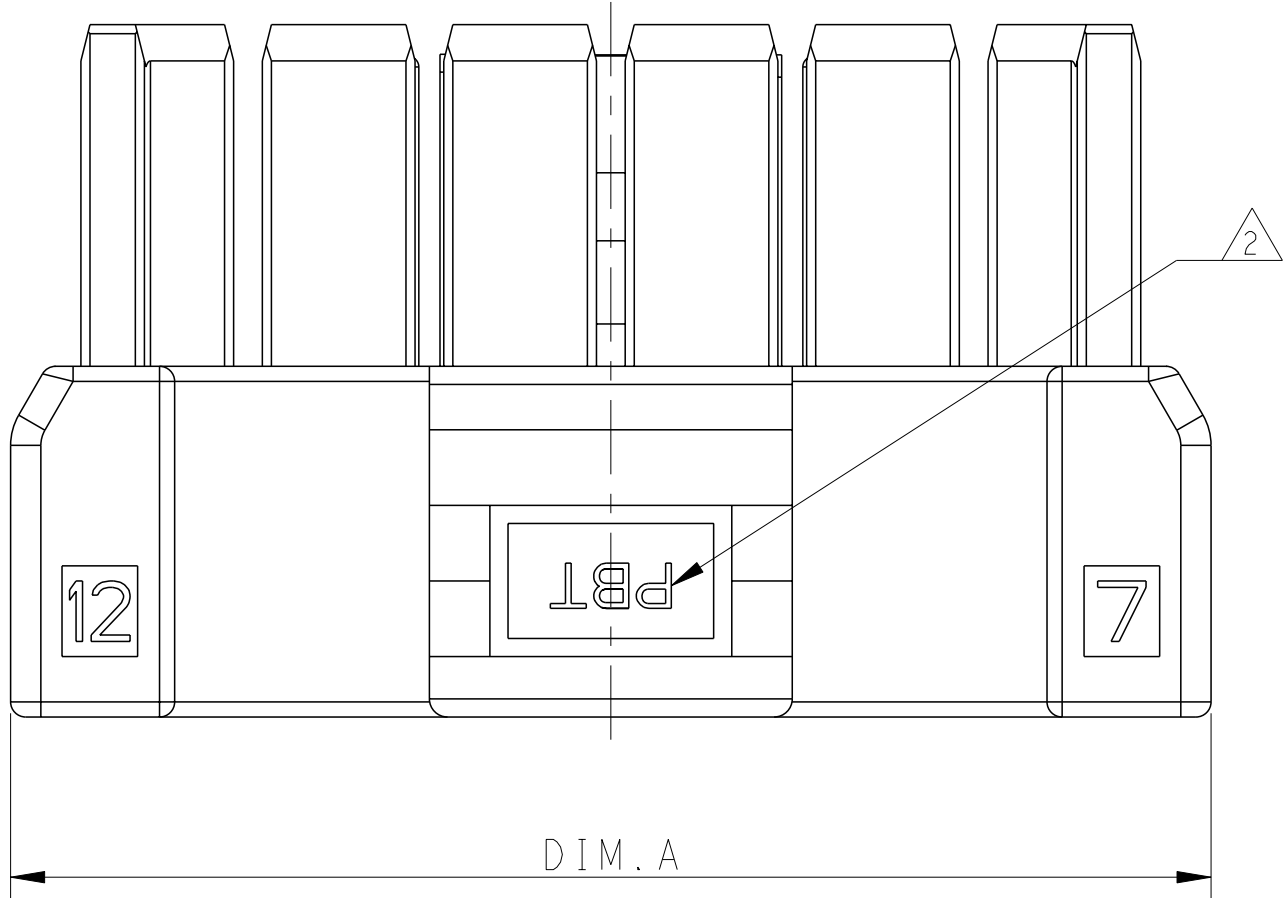
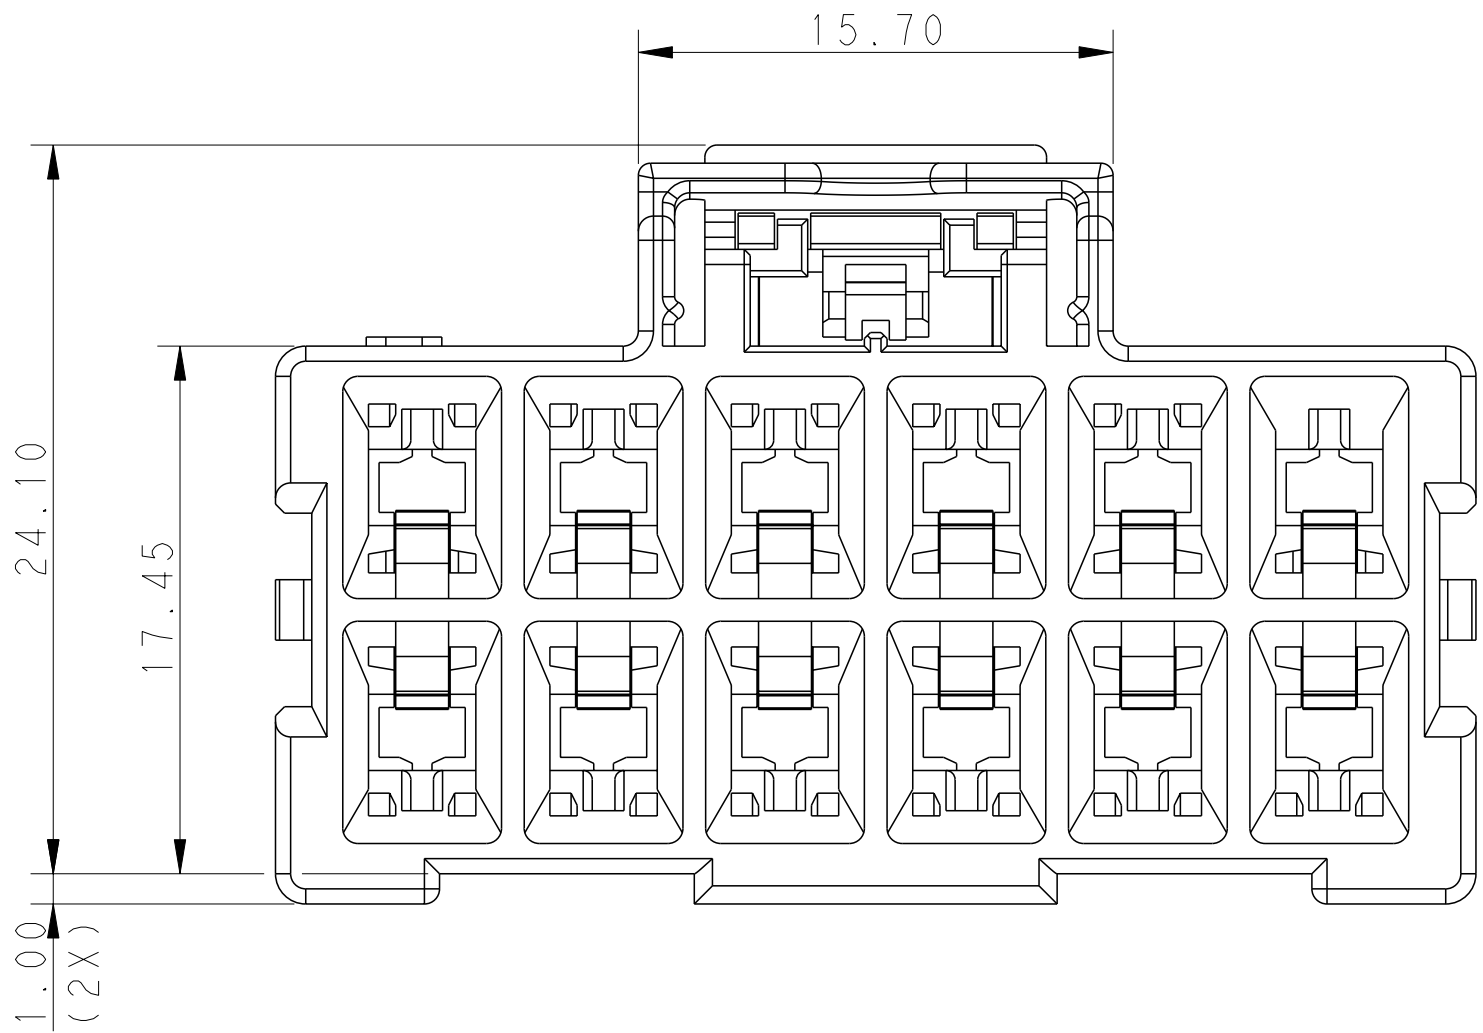


LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION		DATE	DWN	APVD	
		D		REVISED PER ECO-16-009784	30 JUN 16	RS	GJ

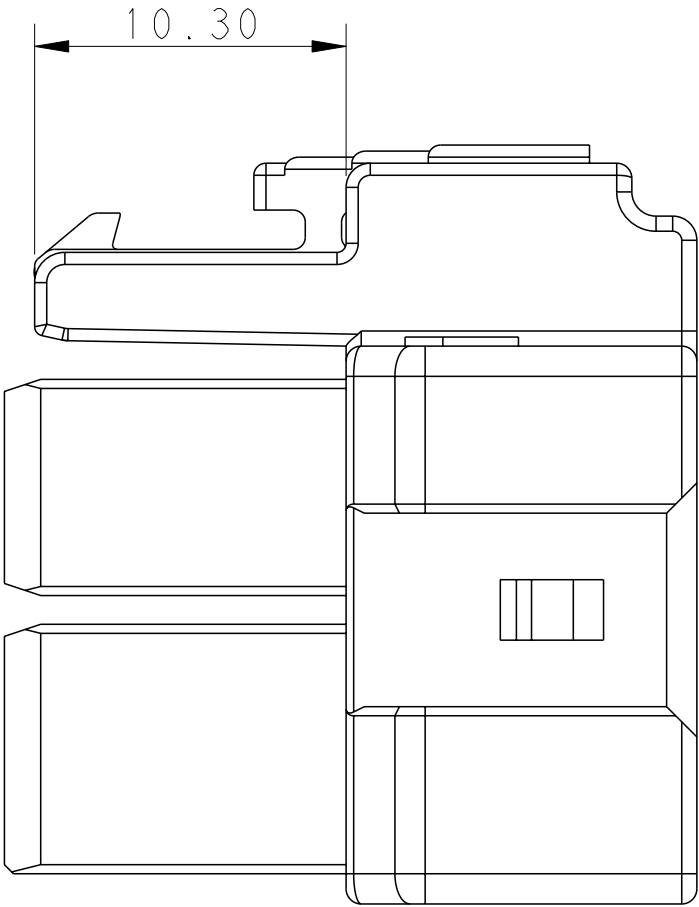


POS.	DIM. A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

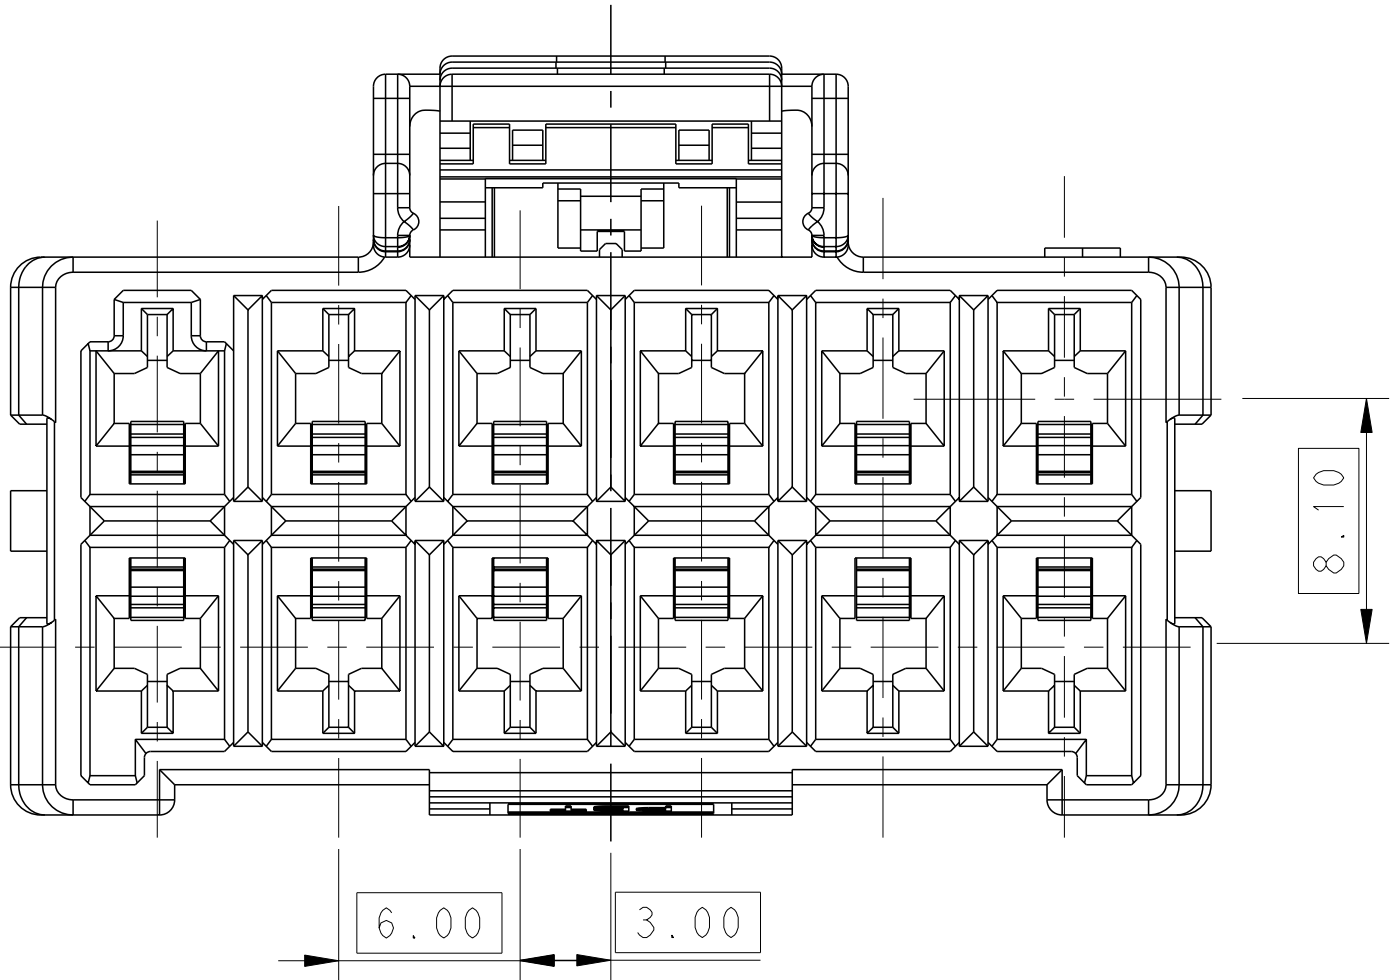


- 1 MATERIAL:
LEVEL 1:PBT,STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

LEVEL 2:NYLON,HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL
- 2 MATERIAL MARK:
LEVEL 1:PBT,LEVEL 2:HDT
- 3 APPLICABLE CONTACT P/N
RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*, 2238066-*
- 4 MATING CONN, P/N
CAP HSG:*-1971774/5-
TPA (LOCKING PLATE):*-1971778-*


5 This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012		 TE Connectivity	
DIMENSIONS:		CHK HAPYE WU 09JUL2012			
mm		APVD YUHONG MAO 09JUL2012		NAME	
		PRODUCT SPEC		PLUG HOUSING, DOUBLE ROW	
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	108-106118		POWER TRIPLE LOCK	
		APPLICATION SPEC		-	
MATERIAL	FINISH	114-106118		SIZE	
		WEIGHT		A100779C=1971776	
		Customer Drawing			
		SCALE 4:1			
		SHEET 1 OF 2			
				REV D	


LOC	DIST	REVISIONS					
		P	LYR	DESCRIPTION	DATE	DWN	APVD
-	-	-	-	SEE SHEET 1	-	-	-

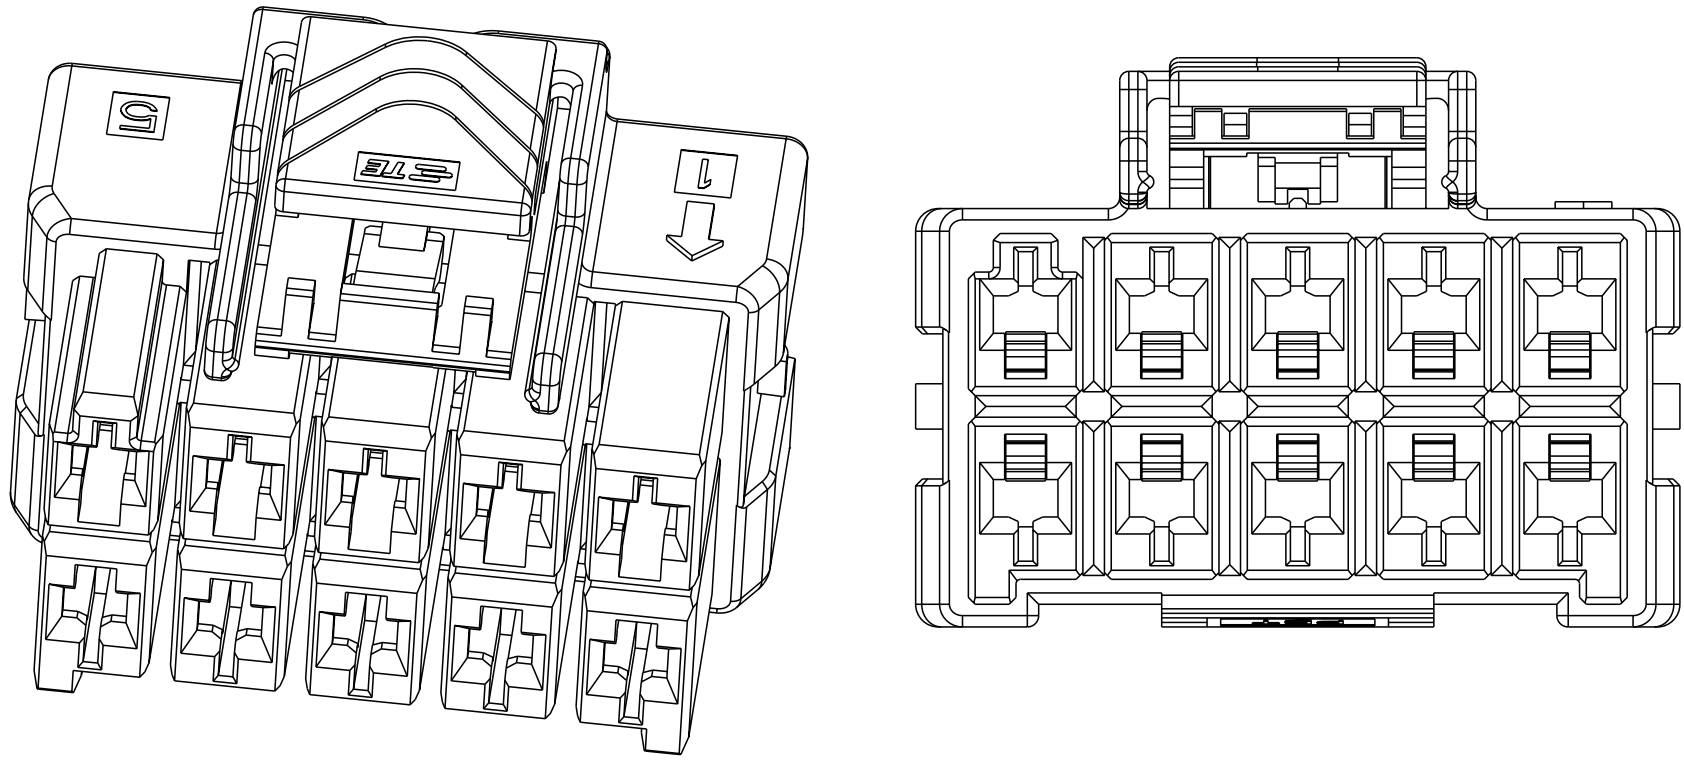


2*5 POSITIONS

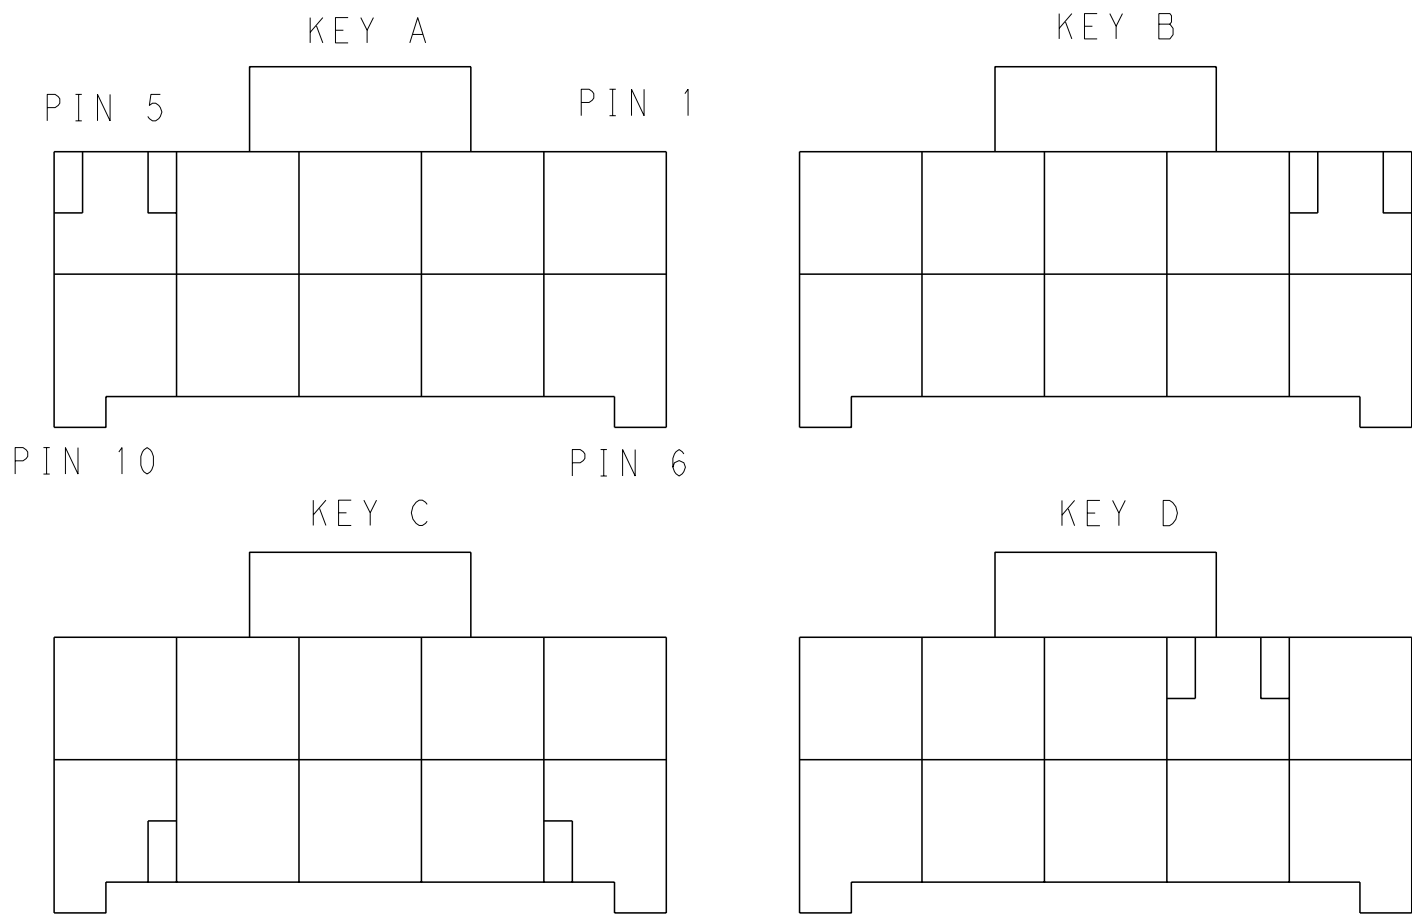


KEYING FOR 2*5 POS.

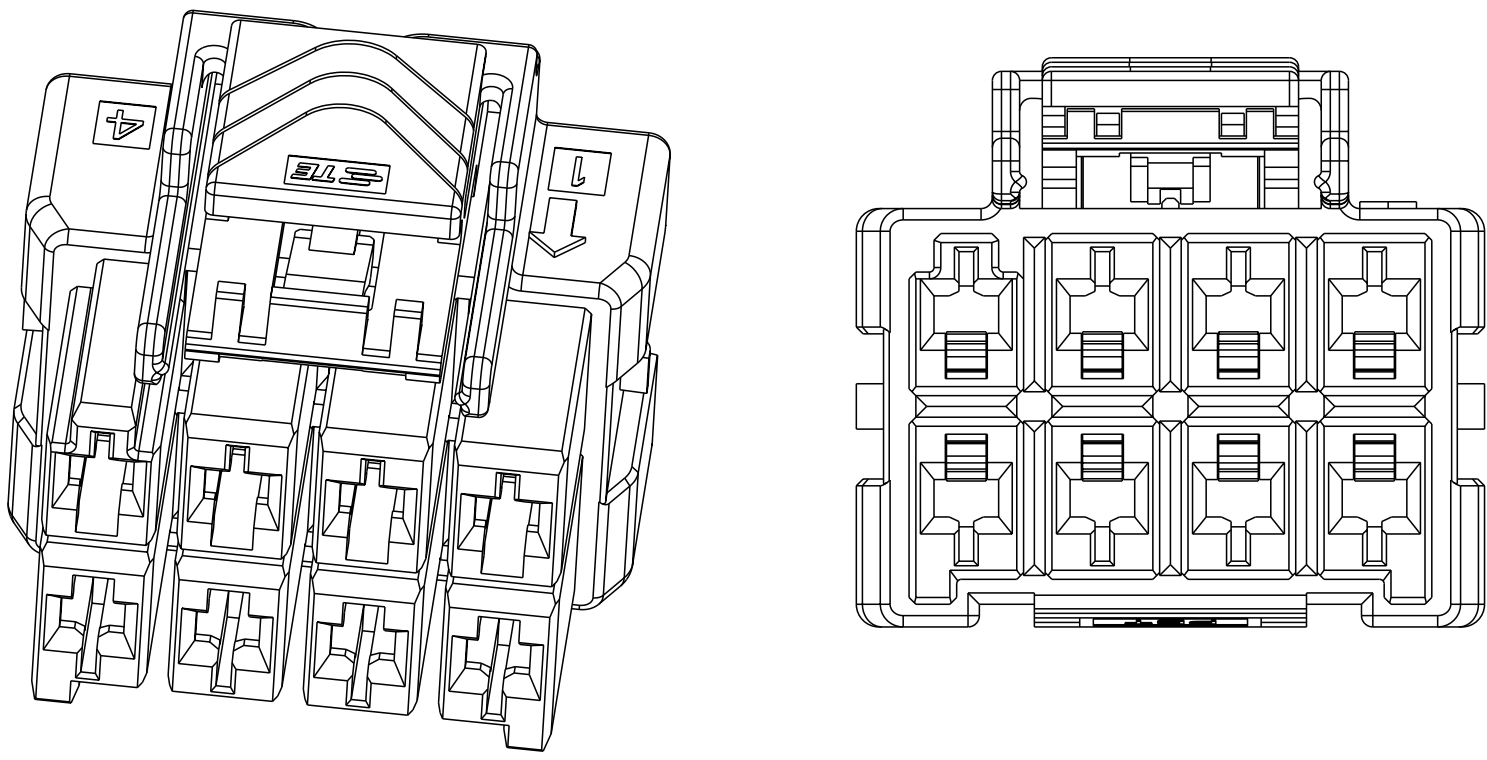


2*4 POSITIONS

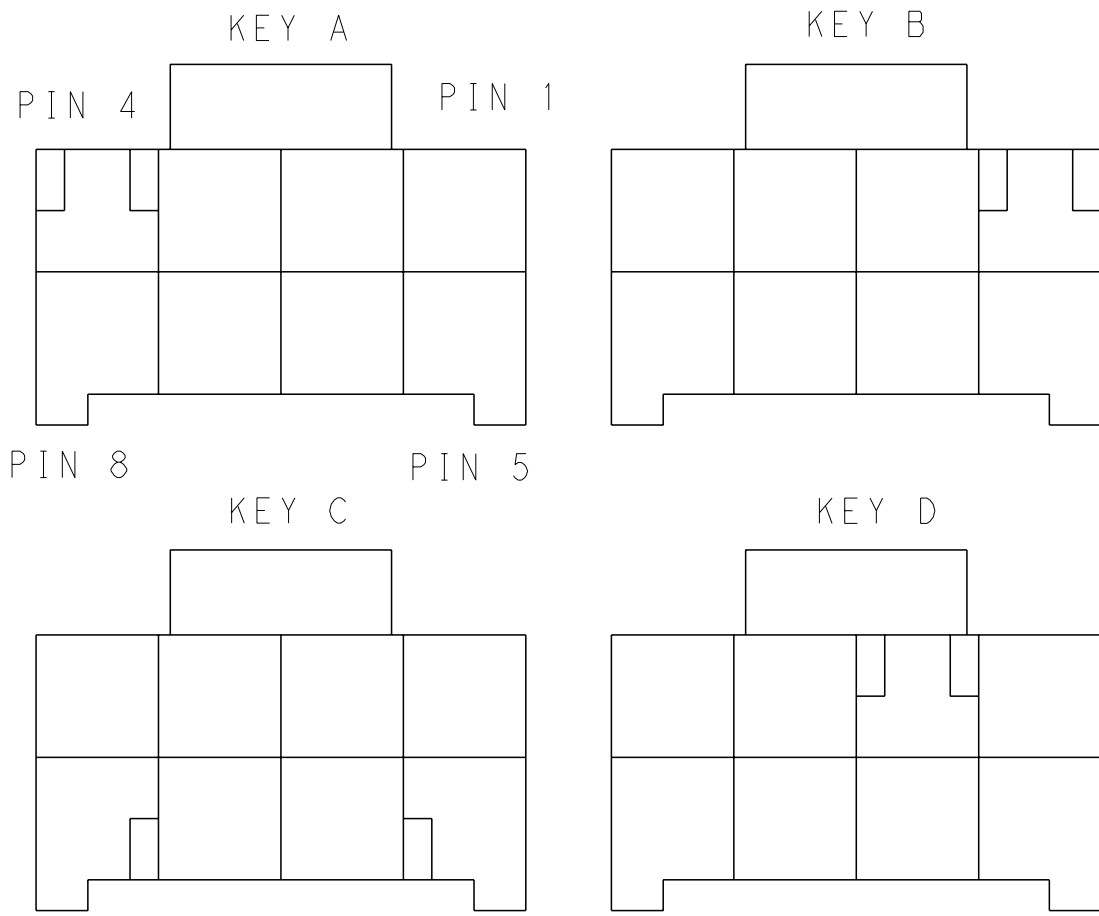


KEYING FOR 2*4 POS.

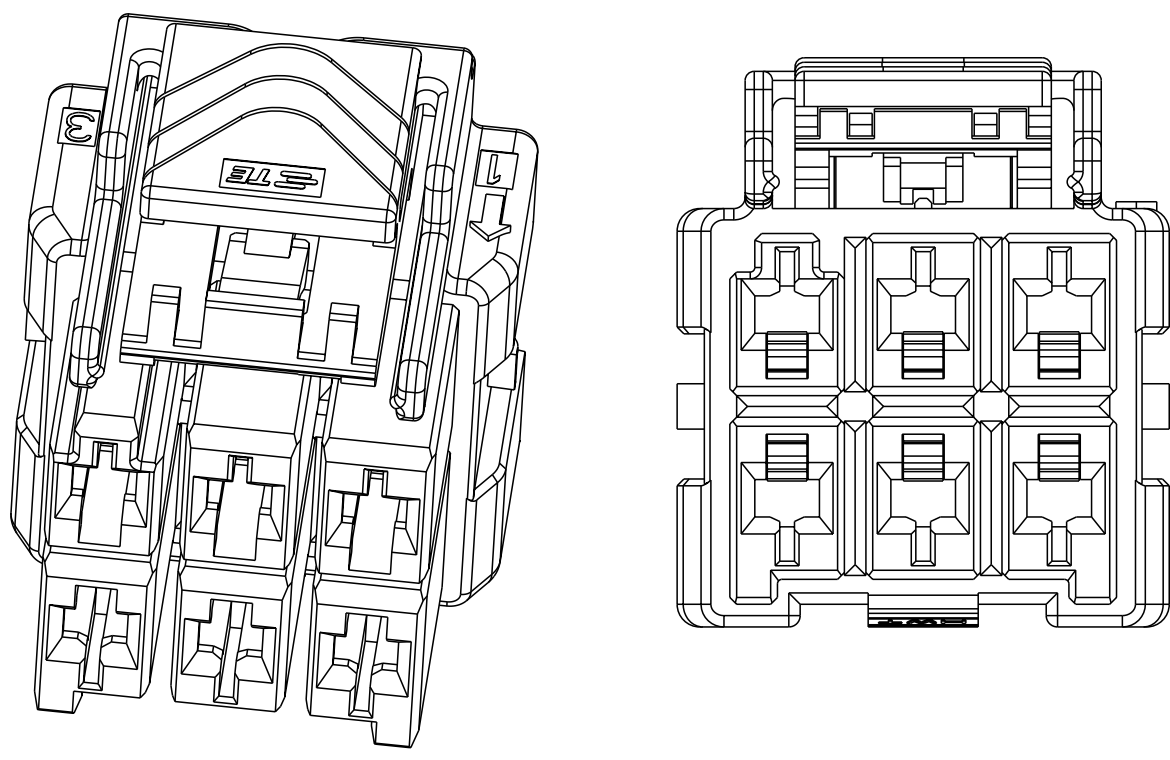


2*3 POSITIONS

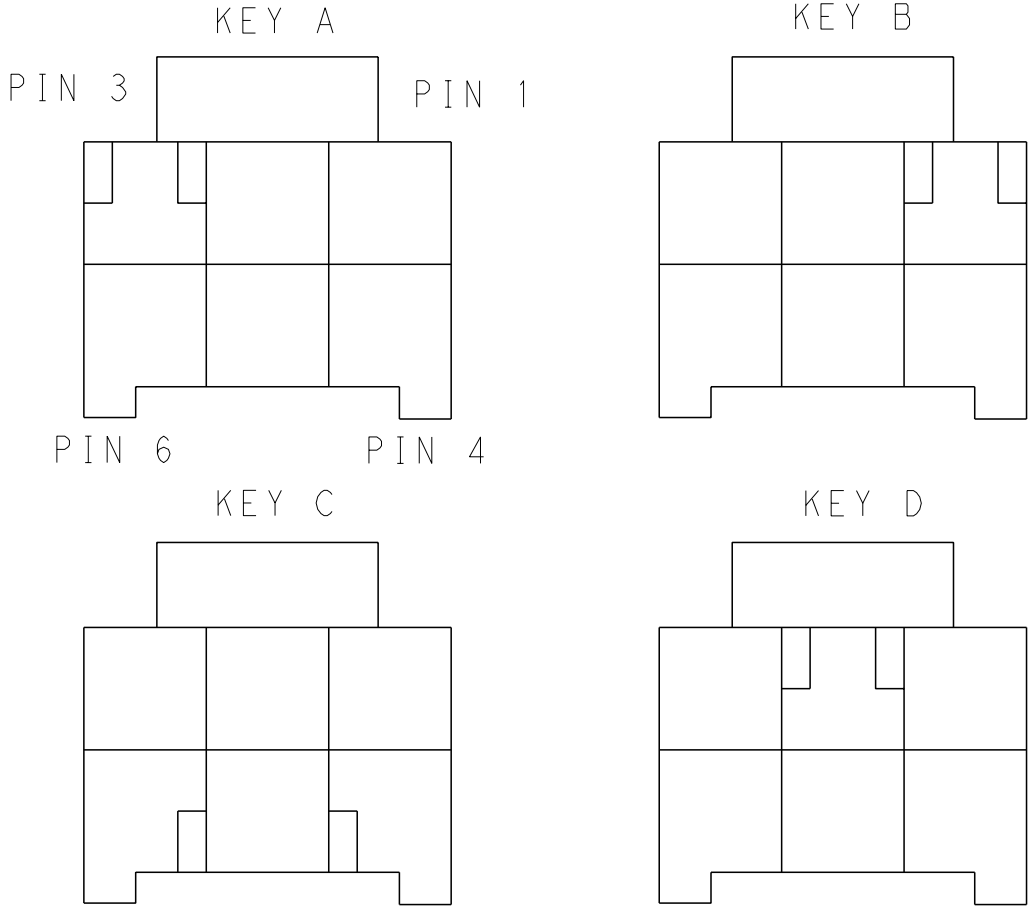

KEYING FOR 2*3 POS.

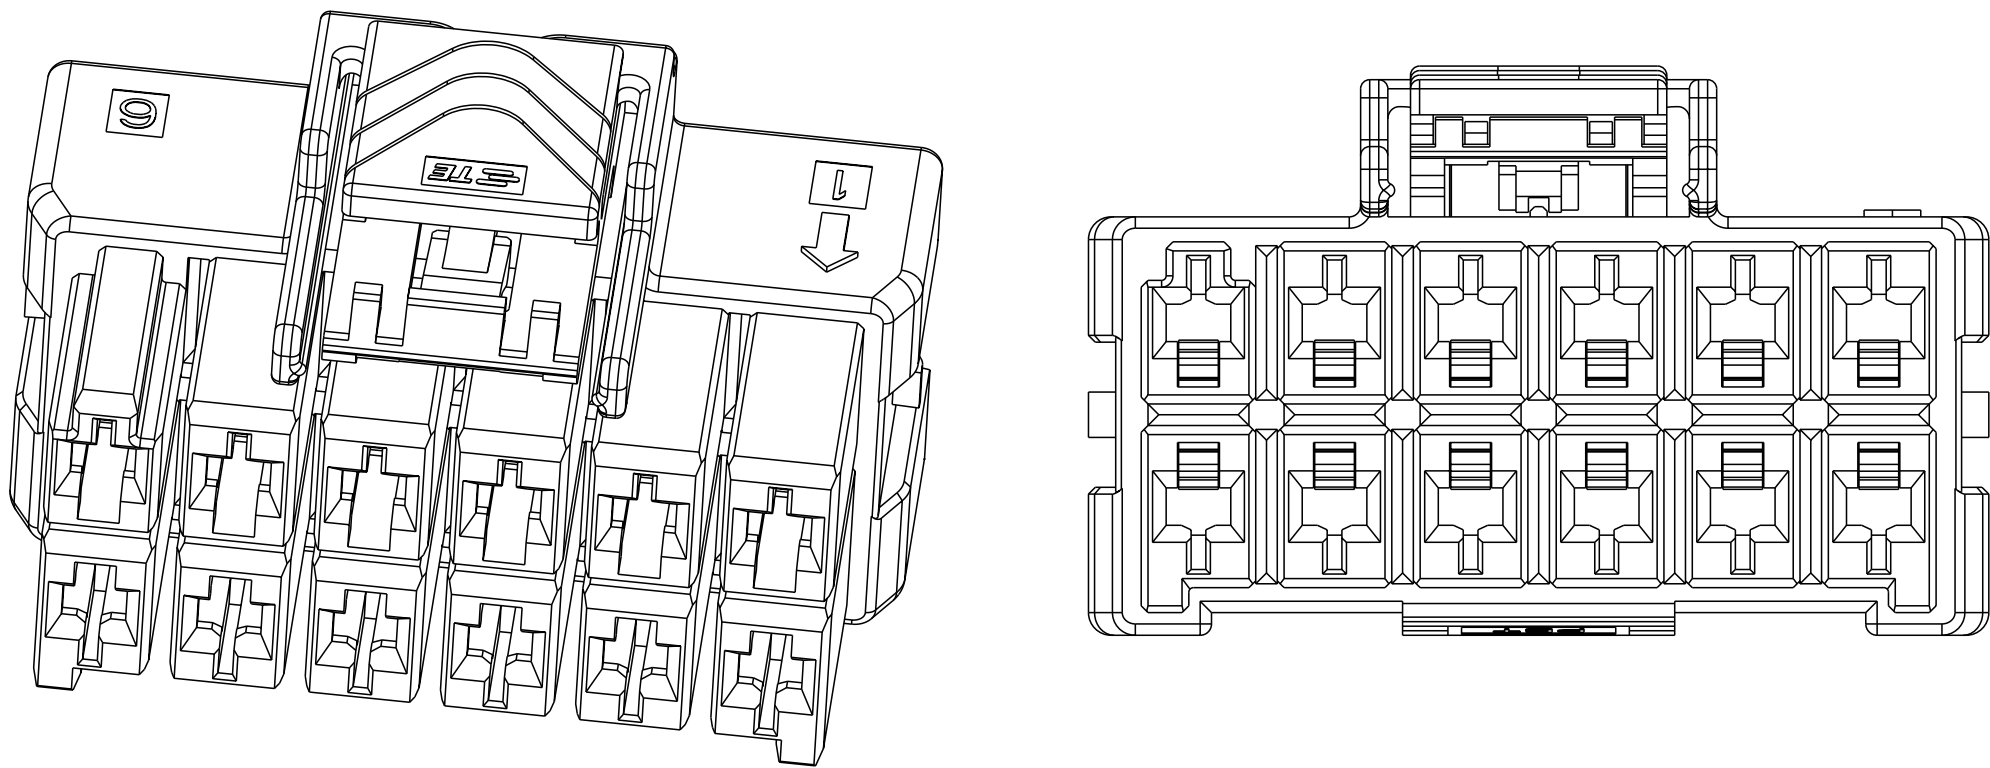

2*6 POSITIONS

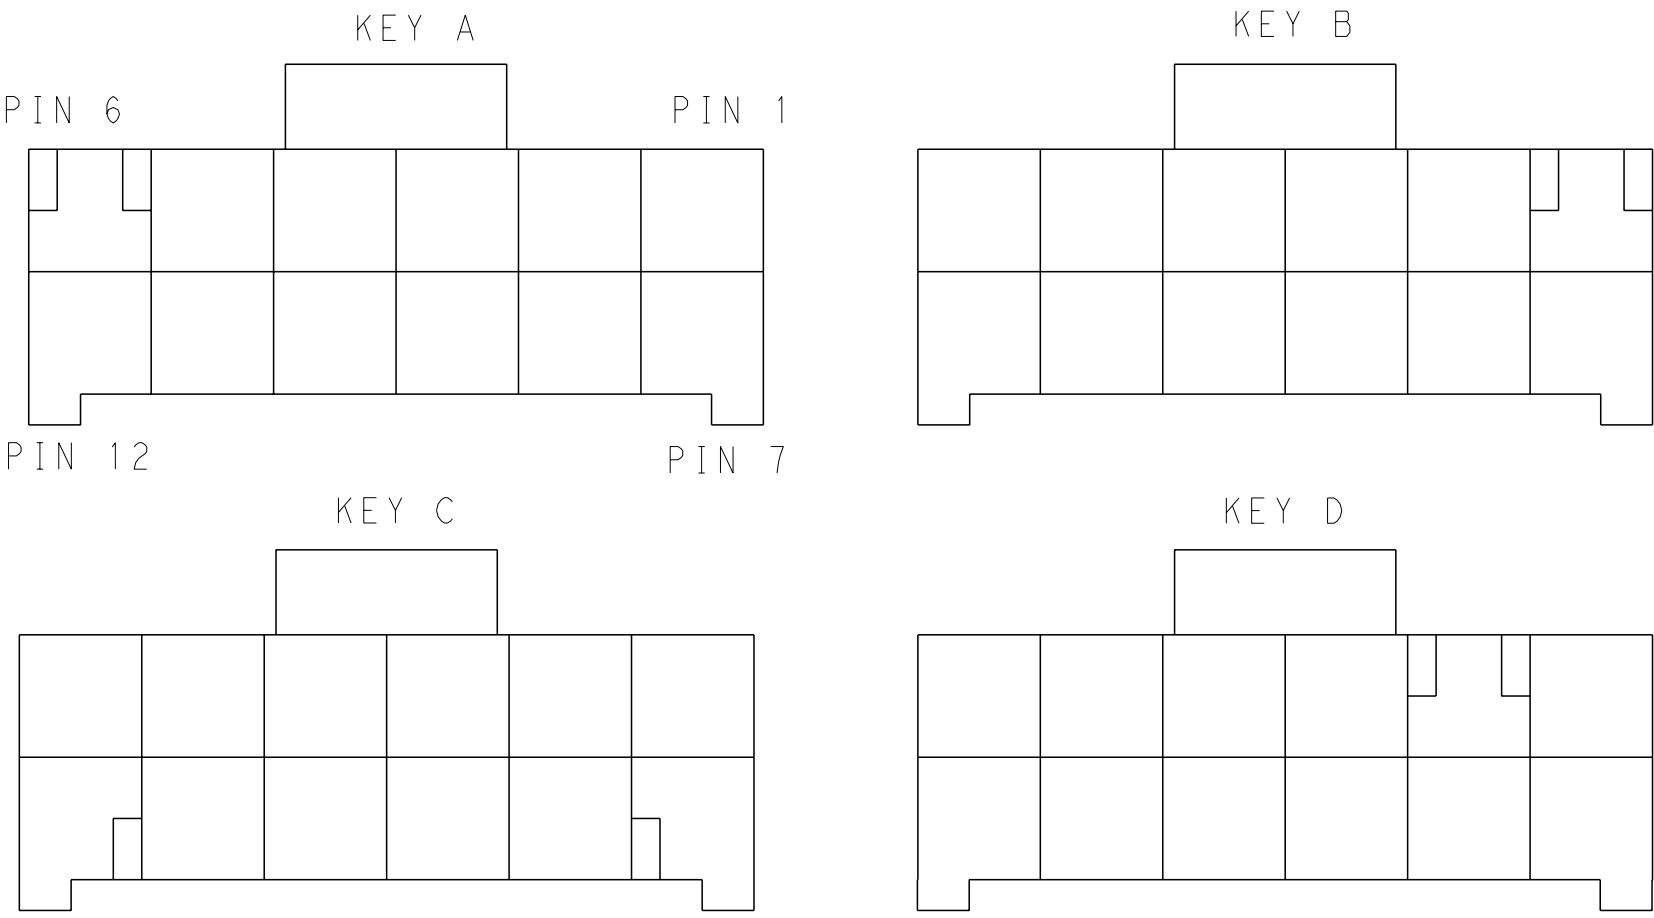

KEYING FOR 2*6 POS.

2*6	LEVEL 1	KEY A	1-1971776-6
		KEY B	2-1971776-6
		KEY C	3-1971776-6
		KEY D	4-1971776-6
	LEVEL 2	KEY A	5-1971776-6
		KEY B	6-1971776-6
		KEY C	7-1971776-6
		KEY D	8-1971776-6
2*5	LEVEL 1	KEY A	1-1971776-5
		KEY B	2-1971776-5
		KEY C	3-1971776-5
		KEY D	4-1971776-5
	LEVEL 2	KEY A	5-1971776-5
		KEY B	6-1971776-5
		KEY C	7-1971776-5
		KEY D	8-1971776-5
POS.	MATERIAL	KEY	P/N

2*4	LEVEL 1	KEY A	1-1971776-4
		KEY B	2-1971776-4
		KEY C	3-1971776-4
		KEY D	4-1971776-4
	LEVEL 2	KEY A	5-1971776-4
		KEY B	6-1971776-4
		KEY C	7-1971776-4
		KEY D	8-1971776-4
2*3	LEVEL 1	KEY A	1-1971776-3
		KEY B	2-1971776-3
		KEY C	3-1971776-3
		KEY D	4-1971776-3
	LEVEL 2	KEY A	5-1971776-3
		KEY B	6-1971776-3
		KEY C	7-1971776-3
		KEY D	8-1971776-3
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWG

CHK

APVD

YUZHONG MAO

09JUL2012

09JUL2012

09JUL2012

TOMMY WU

HAPYE WU

YUZHONG MAO

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

Customer Drawing

108-106118

114-106118

114-106118

114-106118

100779

1971776

1971776

1971776

TE Connectivity

PLUG HOUSING, DOUBLE ROW

POWER TRIPLE LOCK

-

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A1

00779

1971776

-

SCALE

4:1

SHEET

2

OF

2

REV

D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-1971776-4](#)