
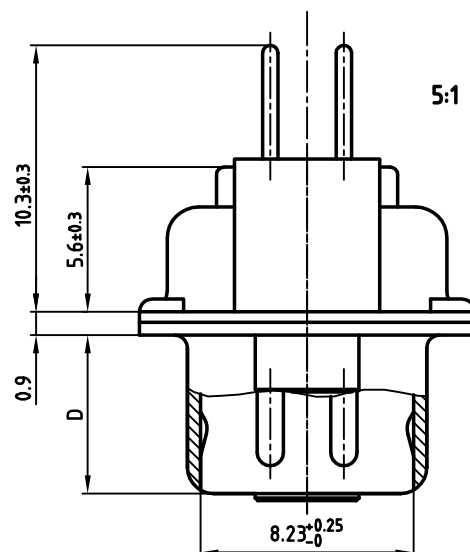

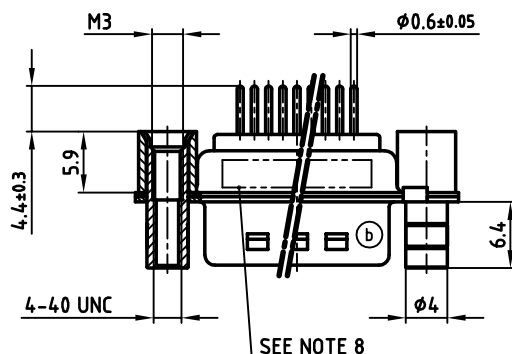


used for: D-SUB

No. of pos.	A -0.76	B $+0.25$	C	D -0.3	PART NO.
9	31.19	16.79	25.00 $+0.12$ -0.13	6.12	163A14439X
15	39.52	25.42	33.30 $+0.15$ -0.1	6.42	163A14440X
25	53.42	38.84	47.04 $+0.2$ -0.15	5.99	163A14459X
37	69.70	55.30	63.50 $+0.13$ -0.1	5.99	163A14469X

16K1A3718

16K1A3717

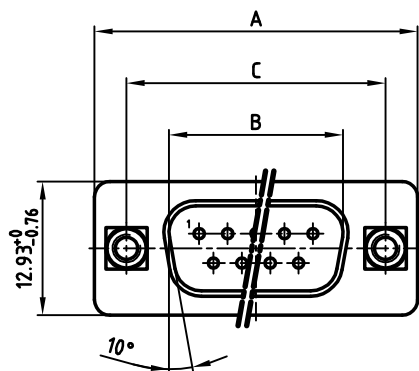

NOTES:

1. METALSHELLS: STEEL; min. 315pin TIN over 40-80pin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8pin HARD GOLD over min. 50pin NICKEL
4. THREADED REAR SPACER/FRONT THREADED LOCK:
COPPER ALLOY; min. 200pin TIN over 80pin NICKEL
5. SLEEVE: COPPER ALLOY; min. 200pin TIN over 80pin NICKEL
6. P.C.B. HOLE DRILLINGS ON SHEET 2
7. MAXIMUM TORQUE VALUE FOR THREAD: 6in. LB
8. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	


THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
1 x b	Ä3721	18.08.2010	K.H.
a	Origin		


tolerance	
2006	date
drawn	07.02.
appd.	07.02.
norm	DIN 41652
d-old	

scale:	2:1 (5:1)
material:	SEE NOTES
title:	
D-SUB MALE	
9-37pos. SOLDER PIN STRAIGHT	
with threaded rear spacer, front threaded lock	
dwg no:	AutoCAD 2004
16K1A1729	
part no:	SEE TABLE


9 pos.

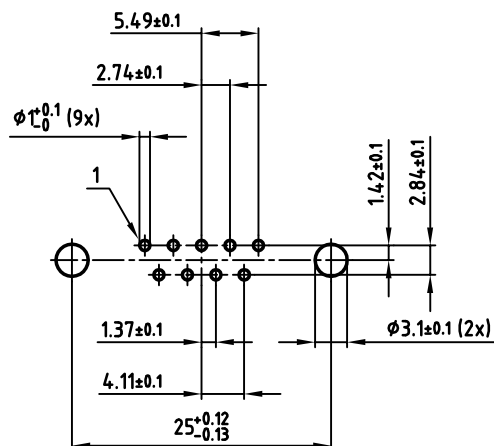


15 pos.

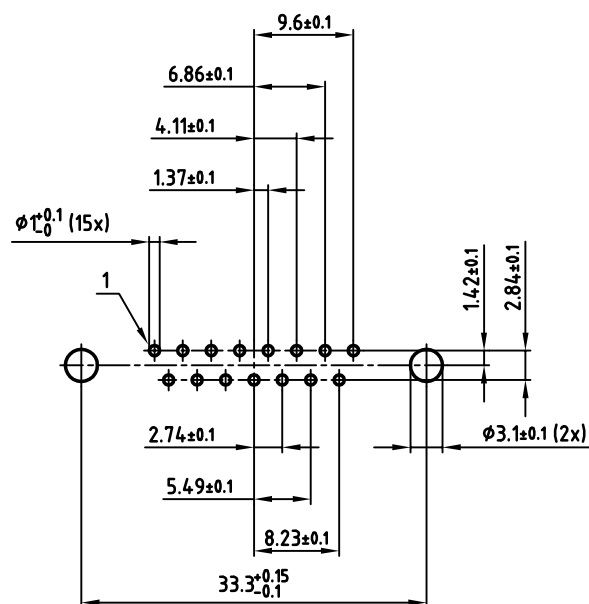

25 pos.

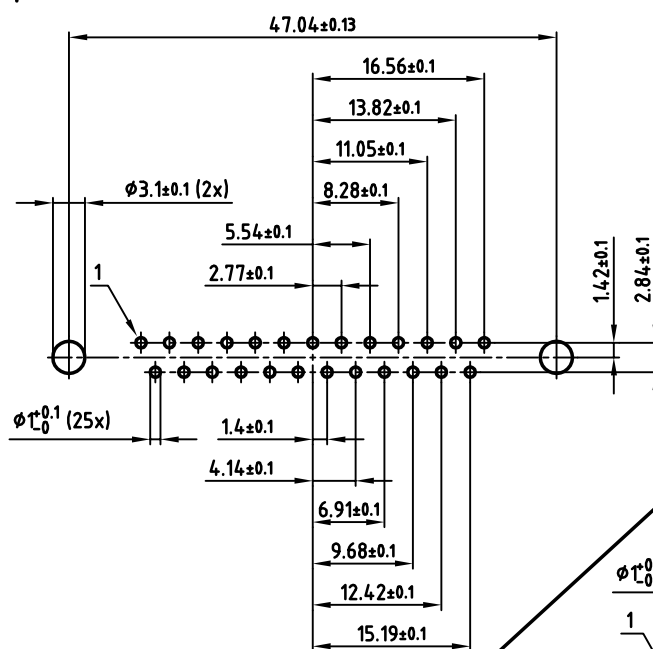

37 pos.

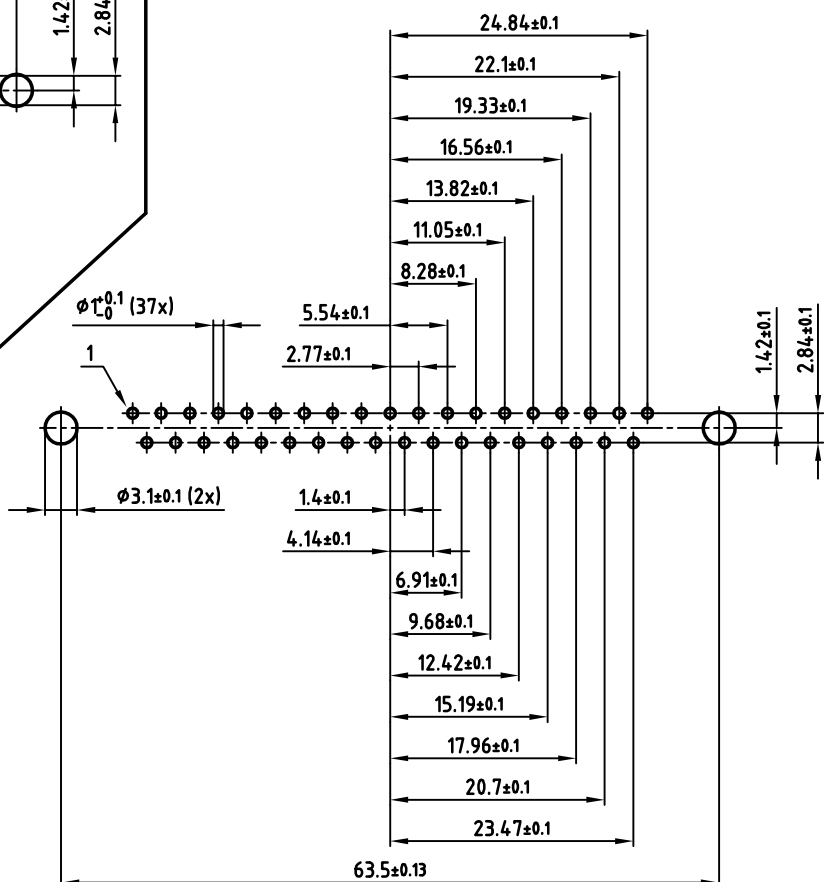

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GMBH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	dim. in mm
2006	date
drawn	07.02. Lehmenkühler
appd.	07.02. Mickenbecker
norm	DIN 41652
d-old	

scale:	2:1
material:	SEE SHEET 1
title:	
P.C.B. HOLE DRILLINGS	
D-SUB MALE 9-37pos. SOLDER PIN	
with threaded rear spacer, front threaded lock	
dwg no:	AutoCAD 2004
16K1A1729	
part no:	SEE SHEET 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CONEC:

[163A14439X](#) [163A14449X](#)