
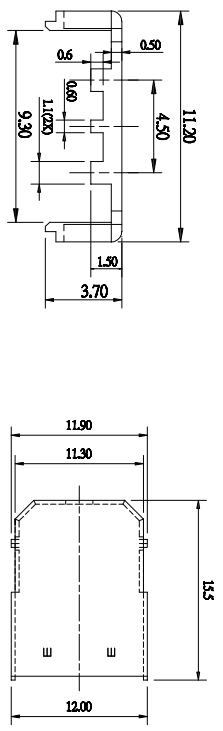
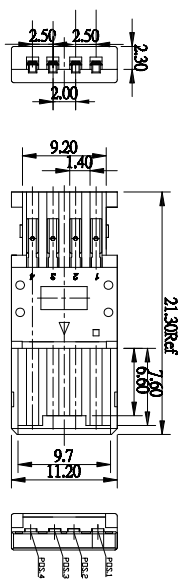


1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	B
1	2	3	4	5	6	7	C
1	2	3	4	5	6	7	D
1	2	3	4	5	6	7	E
1	2	3	4	5	6	7	F
1	2	3	4	5	6	7	G
1	2	3	4	5	6	7	H

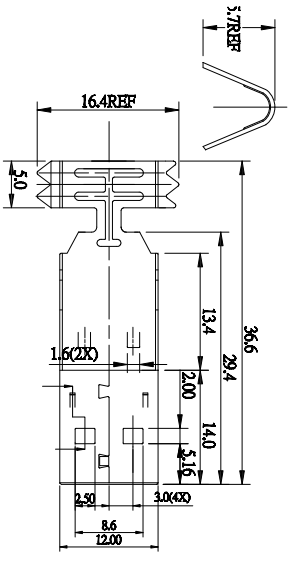

NOTES:

- 1. Material:
- 1.1 Housing: PBT+30%GF UL94V-0, Color White
- 1.2 Shell: SPCC
- 1.3 Contact :Brass
- 2. FINISH:
- 2.1 Contact Area: Selective 5u"Au
Solder Area: Tin Plated
Under: Ni Plated
- 3. MECHANICAL:
- 3.1 Mating Force: 3.57kgf Max.
- 3.2 Unmating Force: 1.02kgf Min
- 3.3 Durability: 1500 cycles Min
- 4. ELECTRICAL:
- 4.1 Current Rating: 1.5A
- 4.2 Dielectric Strength: 500V AC FOR 1 MINUTE
- 4.3 Contact Resistance: 30mΩ Max
- 4.4 Insulation Resistance: 1000 MΩ Min
- 5. Operating temperature: -55°C TO +85°C
- 6. PACKING: PE Bag

RoHS compliant

Scale	Free				
TOLERANCE					
.X	±0.30				
.XX	±0.20				
.XXX	±0.10				
DIM					
X. °	±5°				
Angle	TOL				
UNIT	mm				

Customer-No.	Date	Name	
	07.06.2013	Winnie	Drawn
	15.03.2018	Winnie	Approved



ASSMANN WSW-No.
A-USBPA

Drawing-No.
ASS 5769 CO

Replace
rev01

SHEET

G

H