

Printed-circuit board connector - MSTBA 2,5/ 4-G-5,08 GY7035 - 1702863

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB headers, nominal current: 12 A, rated voltage (III/2): 320 V, nominal cross section: 2.5 mm², number of positions: 4, pitch: 5.08 mm, color: light gray, contact surface: Tin, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.5 mm



The figure shows a 10-position version of the product

Your advantages

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Well-known mounting principle allows worldwide use
- ✓ Plug-in direction parallel to the PCB
- ✓ Closed contour for optimum stability of the plug-in connection
- ✓ Easy PCB replacement thanks to plug-in modules



Key Commercial Data

Packing unit	50 pc
GTIN	
GTIN	4046356621908

Technical data

Dimensions

Length [l]	12 mm
Width	22.32 mm
Pitch	5.08 mm
Dimension a	15.24 mm
Width [w]	22.32 mm
Height [h]	12.1 mm
Height	8.6 mm
Length of the solder pin	3.5 mm
Pin dimensions	1 x 1 mm

Printed-circuit board connector - MSTBA 2,5/ 4-G-5,08 GY7035 - 1702863

Technical data

Dimensions

Length	12 mm
--------	-------

General

Range of articles	MSTBA 2,5/...-G
Rated voltage (III/3)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	12 A
Color	light gray
Number of positions	4

Standards and Regulations


Connection in acc. with standard	EN-VDE
----------------------------------	--------

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings


Diagram

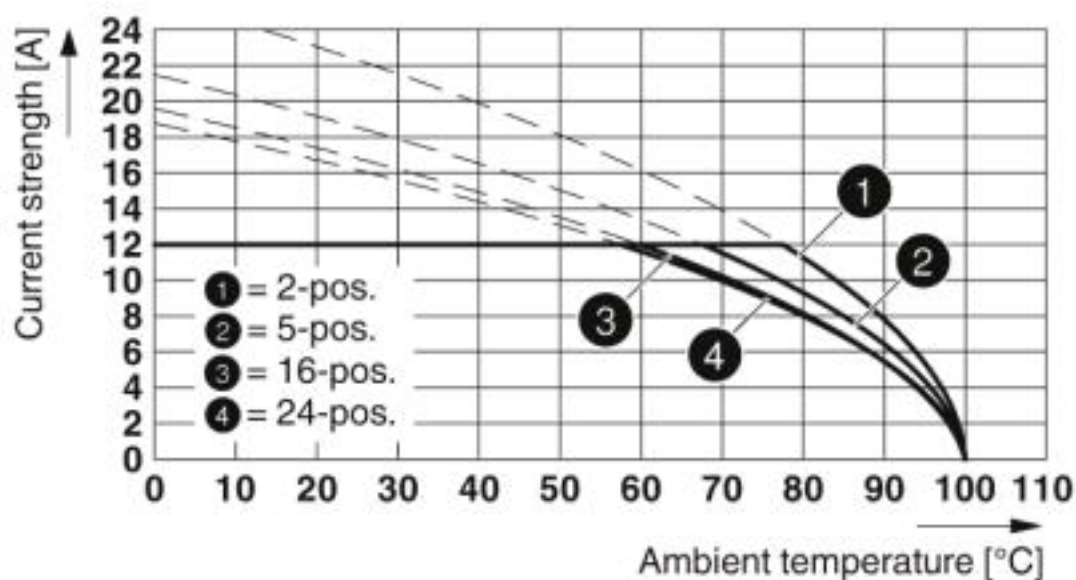

Type: FRONT-MSTB 2,5/...-ST-5,08 with MSTBA 2,5/...-G-5,08


Printed-circuit board connector - MSTBA 2,5/ 4-G-5,08 GY7035 - 1702863

Diagram

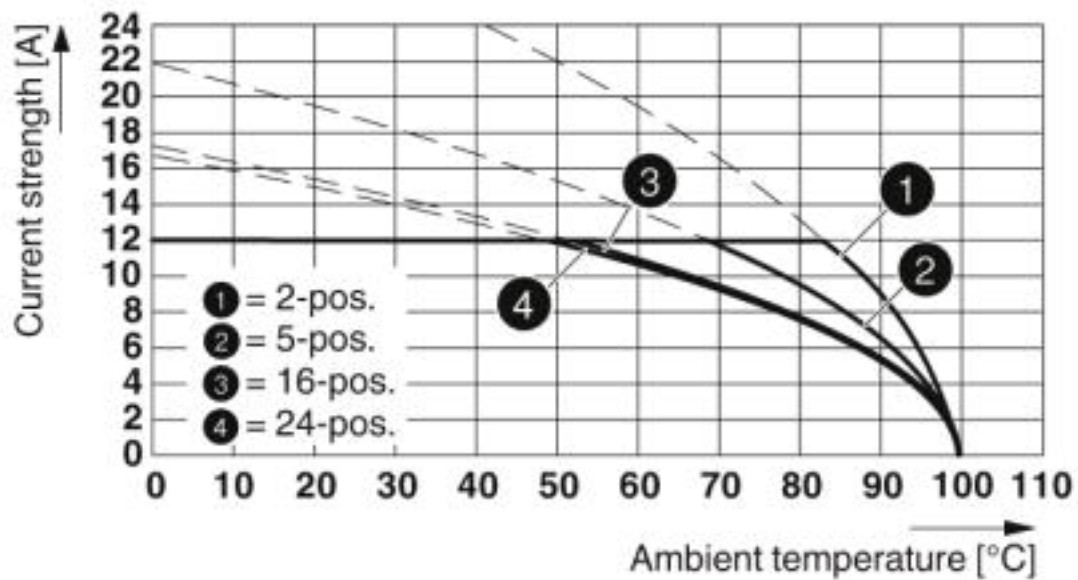

Type: IC 2,5/...-G-5,08 with MSTBA 2,5/...-G-5,08


Diagram

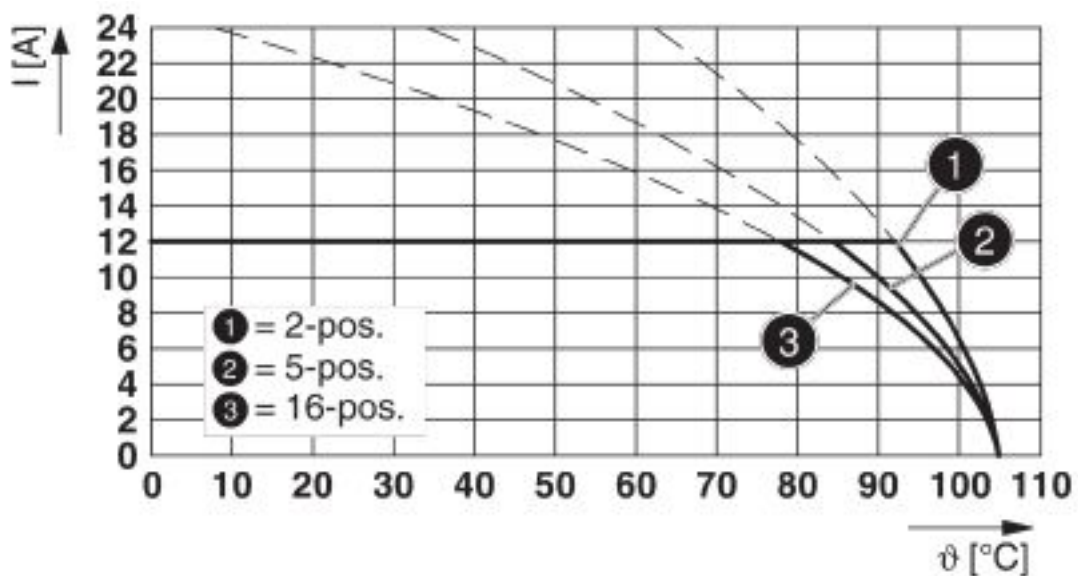

Type: FKCVR 2,5/...-ST-5,08 with MSTBA 2,5/...-G-5,08


Printed-circuit board connector - MSTBA 2,5/ 4-G-5,08 GY7035 - 1702863

Diagram

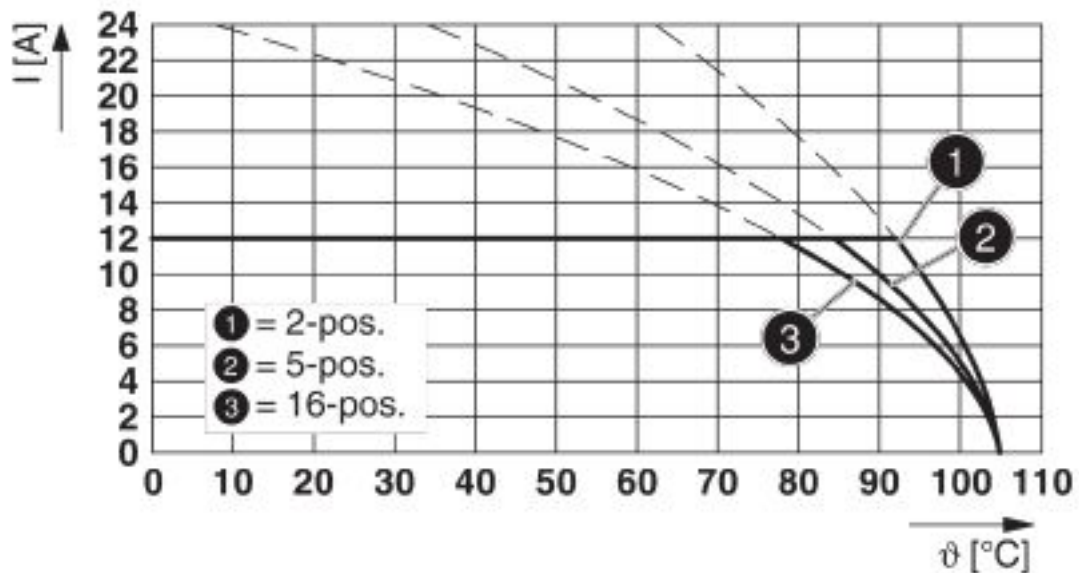

Type: FKCVW 2,5/...-ST-5,08 with MSTBA 2,5/...-G-5,08


Diagram

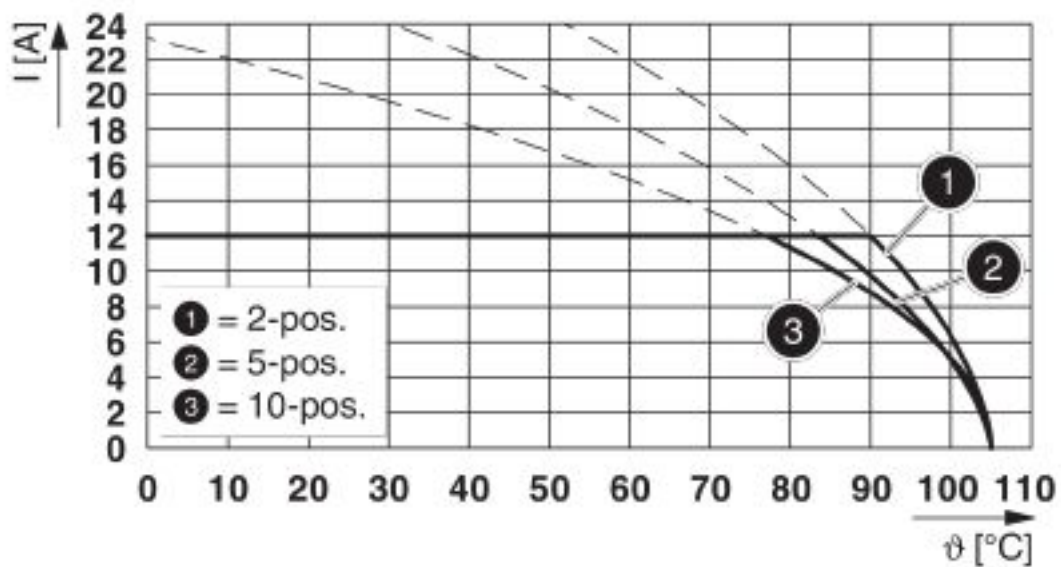

Type: TFKC 2,5/...-ST-5,08 with MSTBA 2,5/...-G-5,08


Printed-circuit board connector - MSTBA 2,5/ 4-G-5,08 GY7035 - 1702863

Diagram

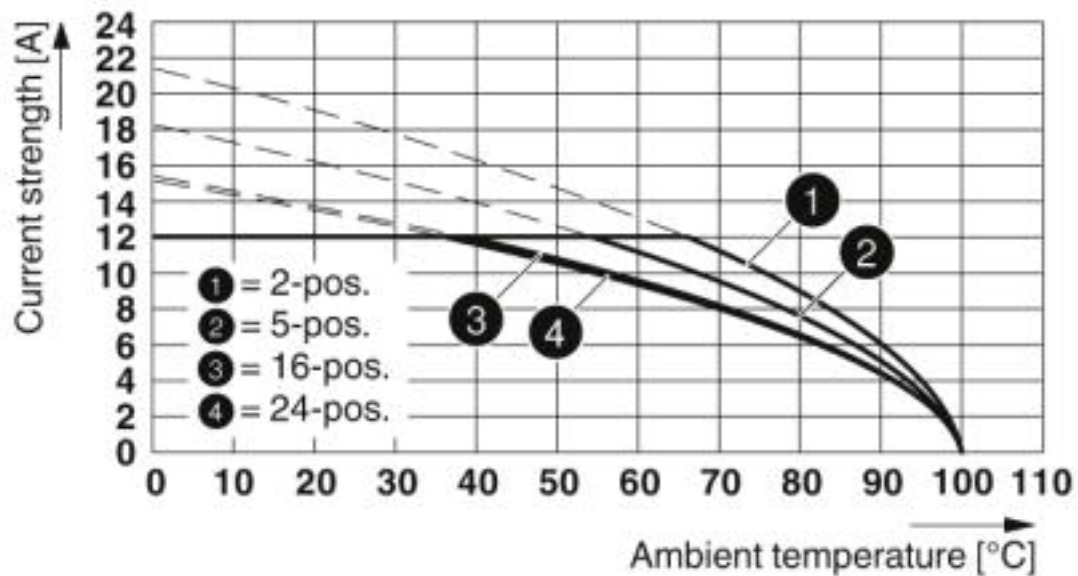

Type: MSTBP 2,5/...-ST-5,08 with MSTBW 2,5/...-G-5,08


Diagram

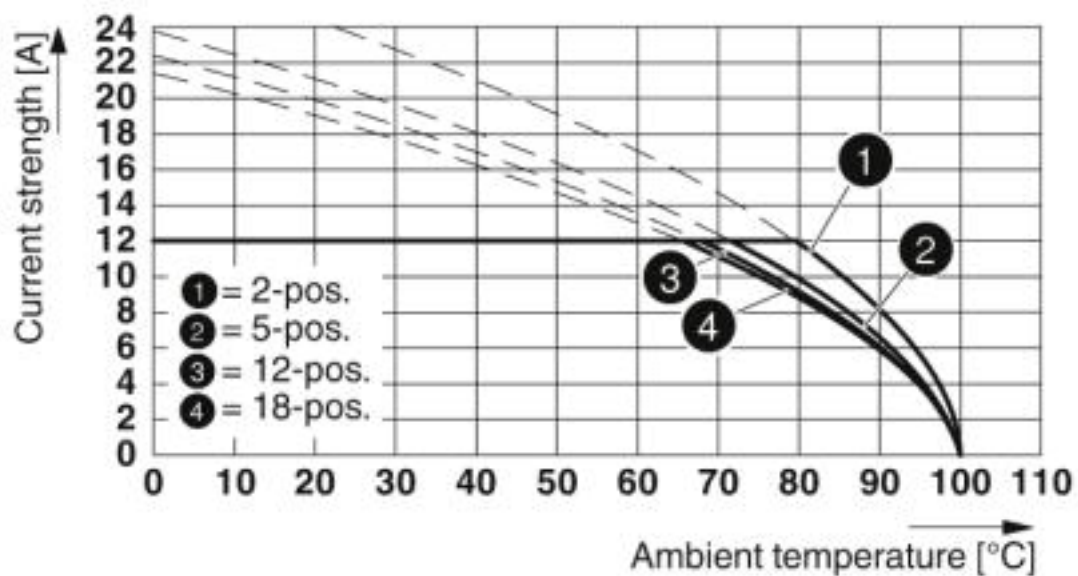

Type: MSTBT 2,5/...-ST-5,08 with MSTBA 2,5/...-G-5,08-5,08


Printed-circuit board connector - MSTBA 2,5/ 4-G-5,08 GY7035 - 1702863

Diagram

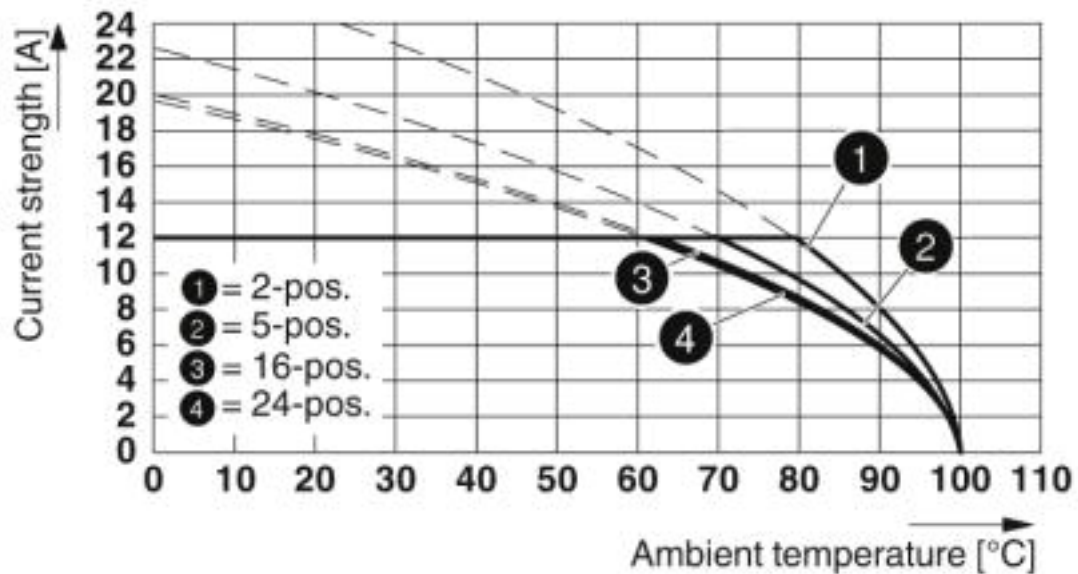

Type: MSTBP 2,5/...-ST-5,08 with MSTBA 2,5/...-G-5,08-5,08


Diagram

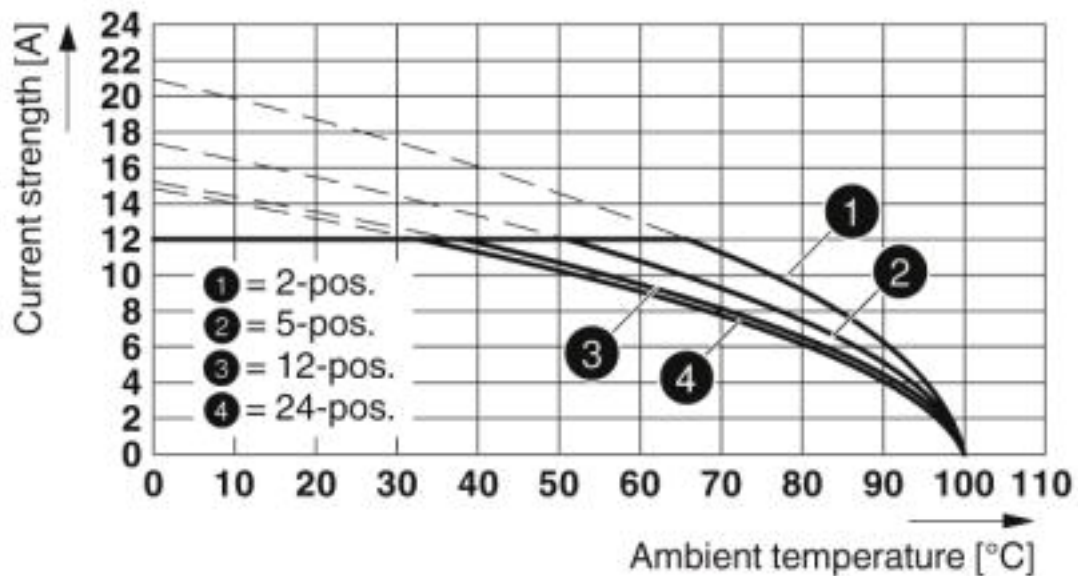

Type: MVSTBR 2,5/...-ST-5,08 with MSTBA 2,5/...-G-5,08

Printed-circuit board connector - MSTBA 2,5/ 4-G-5,08 GY7035 - 1702863

Diagram

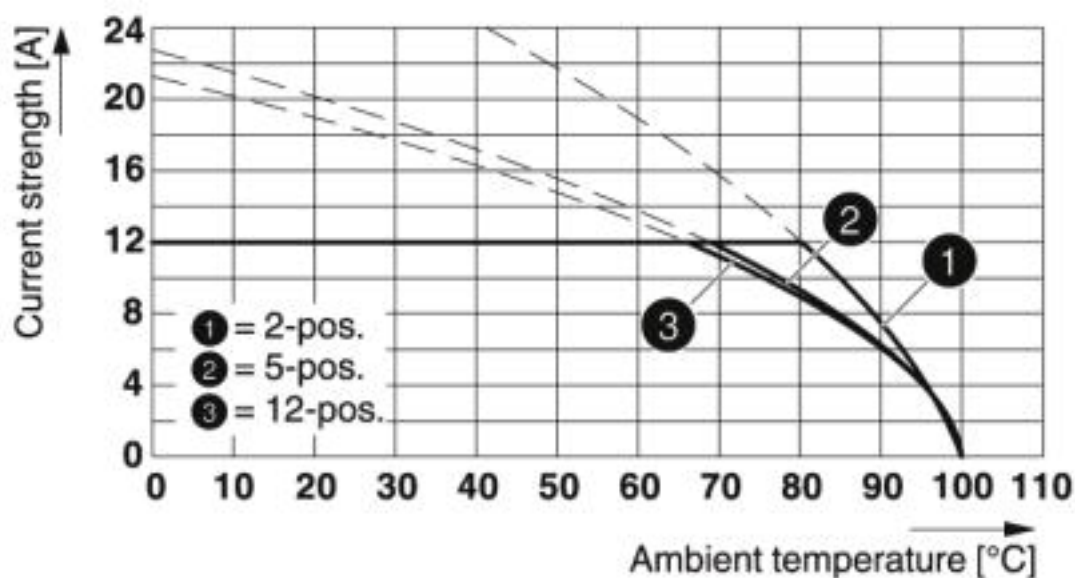

Type: FKCN 2,5/...-ST-5,08 with MSTBA 2,5/...-G-5,08

Classifications

eCl@ss

eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 4.0	EC002637
ETIM 5.0	EC002637
ETIM 6.0	EC002637
ETIM 7.0	EC002637

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409

Printed-circuit board connector - MSTBA 2,5/ 4-G-5,08 GY7035 - 1702863

Classifications

UNSPSC

UNSPSC 13.2	39121409
UNSPSC 18.0	39121409
UNSPSC 19.0	39121409
UNSPSC 20.0	39121409
UNSPSC 21.0	39121409

Approvals

Approvals

Approvals

EAC / CSA / IEC EE CB Scheme / cULus Recognized / VDE Zeichengenehmigung

Ex Approvals

Approval details

EAC		B.01742
-----	---	---------

CSA		http://www.csagroup.org/services-industries/product-listing/	LR13631-2585950
	B	D	
Nominal voltage UN	300 V	300 V	
Nominal current IN	10 A	10 A	

IECEE CB Scheme		http://www.iecee.org/	DE1-60988-B1B2
Nominal voltage UN	250 V		
Nominal current IN	12 A		

Printed-circuit board connector - MSTBA 2,5/ 4-G-5,08 GY7035 - 1702863

Approvals

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E60425-19931011
	B	D	
Nominal voltage UN	300 V	300 V	
Nominal current IN	15 A	10 A	

VDE Zeichengenehmigung		http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx	40050648
Nominal voltage UN	250 V		
Nominal current IN	12 A		

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>