

Disassembly tool for LUMOTAST 25, RAFIX 16

5.05.800.042/0000



General information

| | |
|-------------|-----------------------|
| Fitting for | LUMOTAST 25, RAFIX 16 |
|-------------|-----------------------|

Other specifications

| | |
|---|--|
| Shock resistance acc. to IEC 60068-2-27 | amplitude < 50g, 11ms, half sinusoidal |
|---|--|

| | |
|------------------------------|--------|
| Ambient temp. operating min. | -25 °C |
|------------------------------|--------|

| | |
|---|--------|
| Ambient temp. operating max. with lamp /LED | +55 °C |
|---|--------|

| | |
|--------------------------|--------|
| Storage temperature min. | -40 °C |
|--------------------------|--------|

| | |
|--------------------------|--------|
| Storage temperature max. | +85 °C |
|--------------------------|--------|



| | |
|--------------------------|--|
| Environmental resistance | acc. to IEC 60068-2-14, -30, -33 and -78 |
|--------------------------|--|

| | |
|---|-----|
| Hot wire ignition acc. to IEC 60695-2-1 | yes |
|---|-----|

| | |
|--|-----------------------|
| Resistance to vibrations acc. to IEC 60068-2-6 | 10 g at 20 ... 500 Hz |
|--|-----------------------|

| | |
|----------------|-----|
| ROHS compliant | yes |
|----------------|-----|

| | |
|-----------------|-----|
| REACH compliant | yes |
|-----------------|-----|

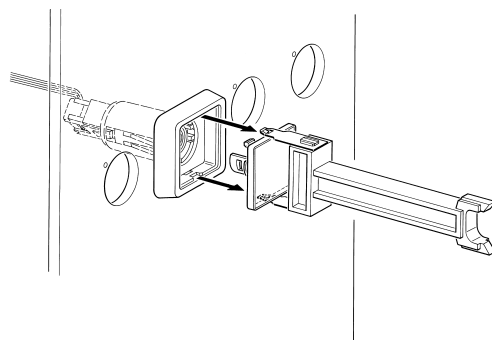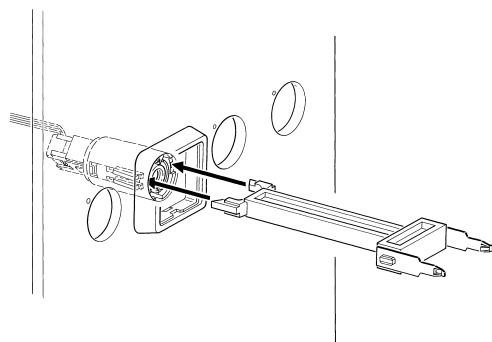

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RAFI:](#)

[5.05.800.042/0000](#)