
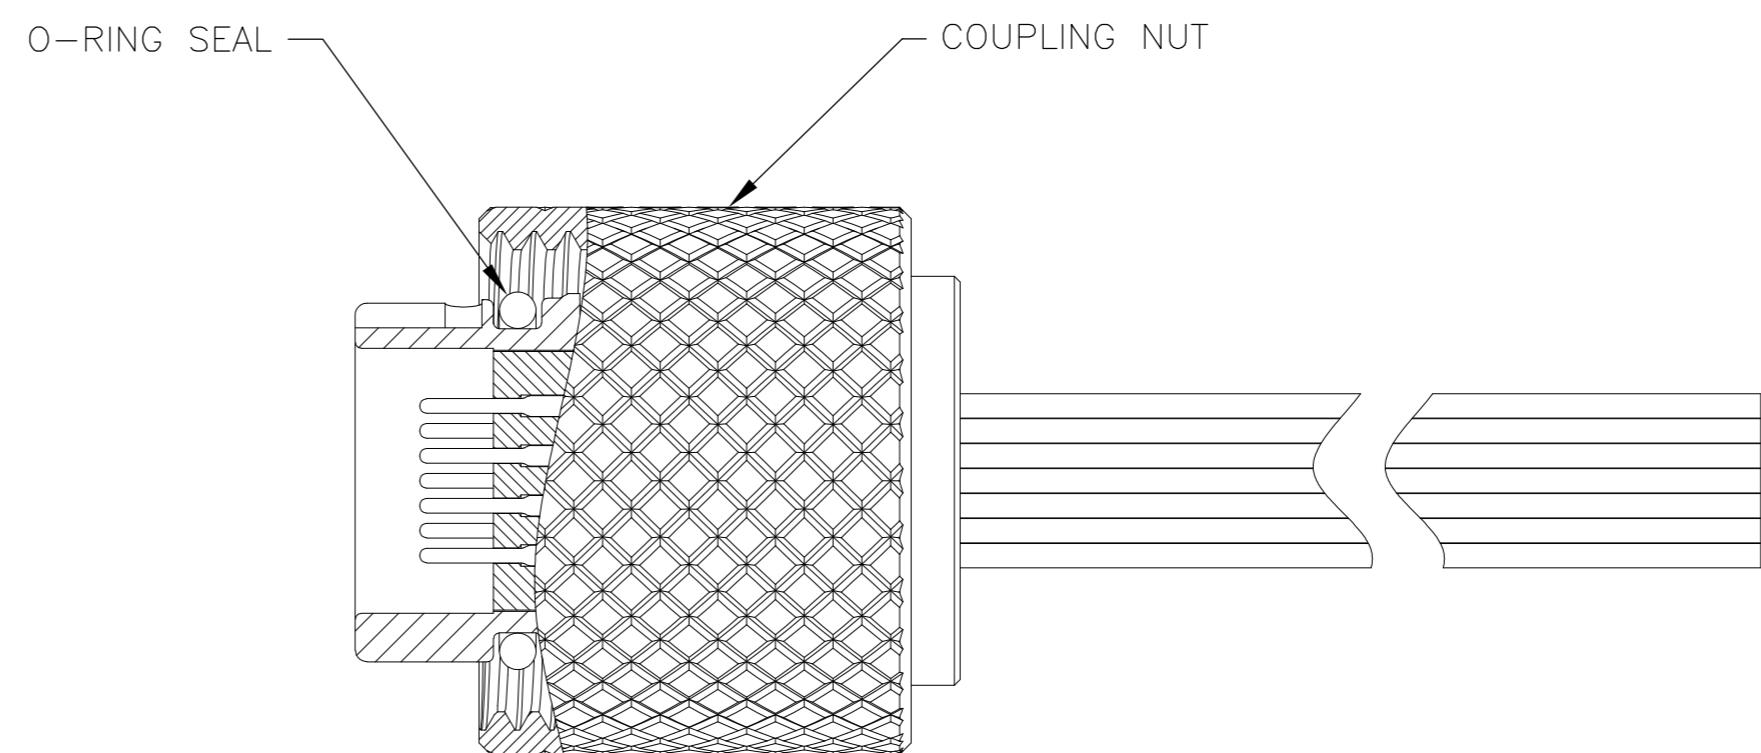
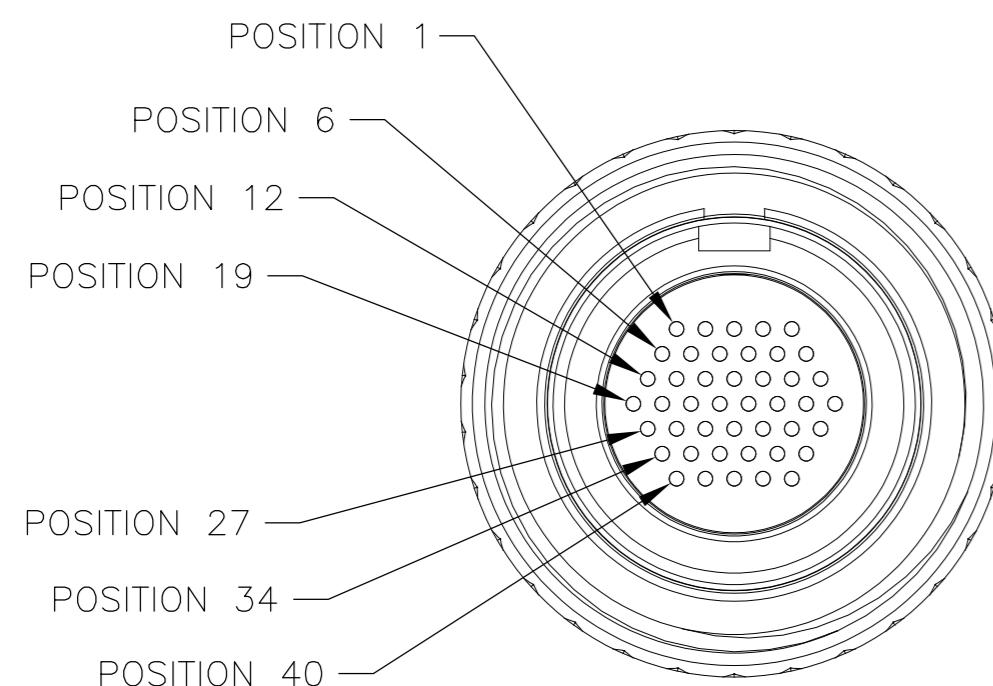
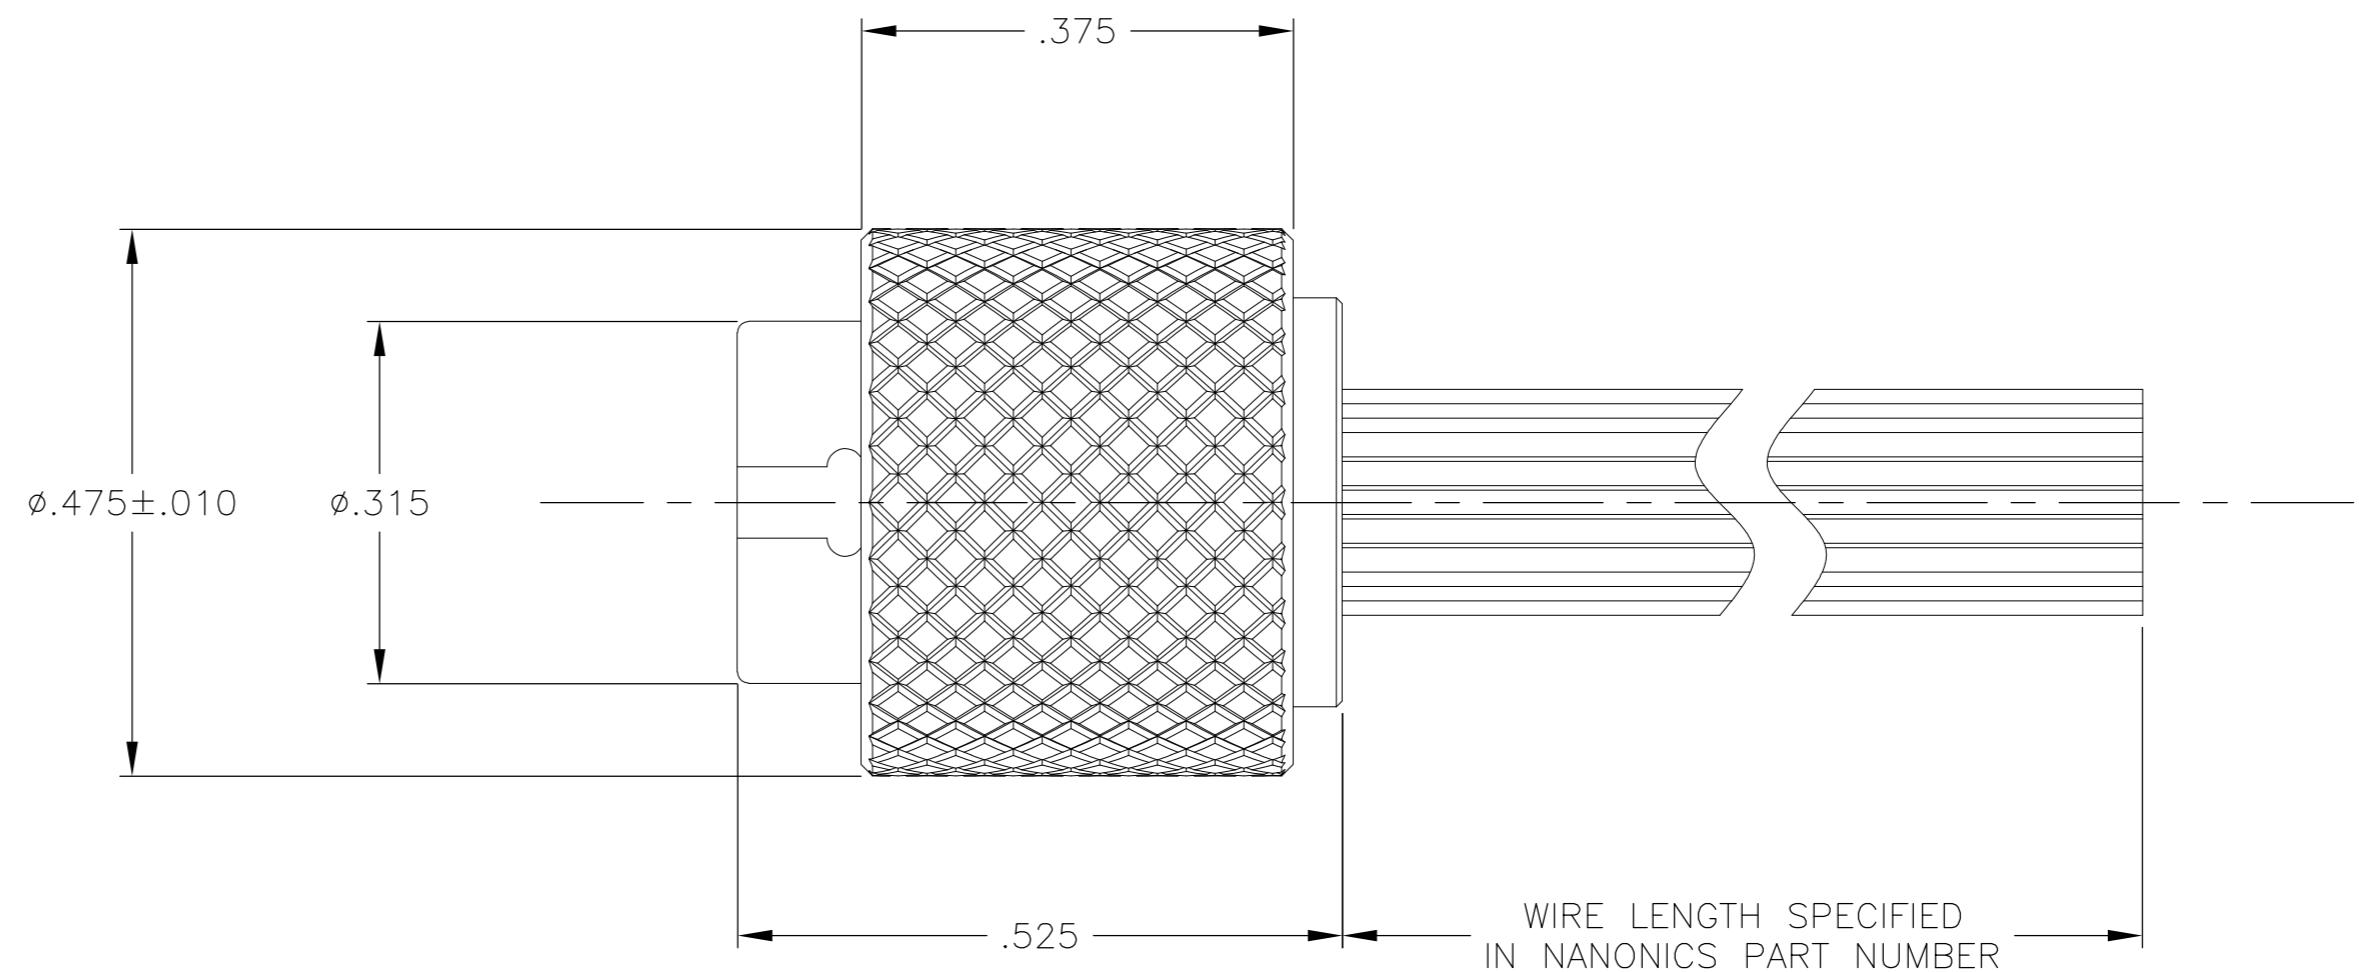


THIS DRAWING IS UNPUBLISHED.  
RELEASED FOR PUBLICATION  
ALL RIGHTS RESERVED.  
© COPYRIGHT - By -

REVISIONS  
LOC — DIST —  
P LTR —  
H UPDATE PER ECO-11-013056  
23 JUN 11 CAS MKS

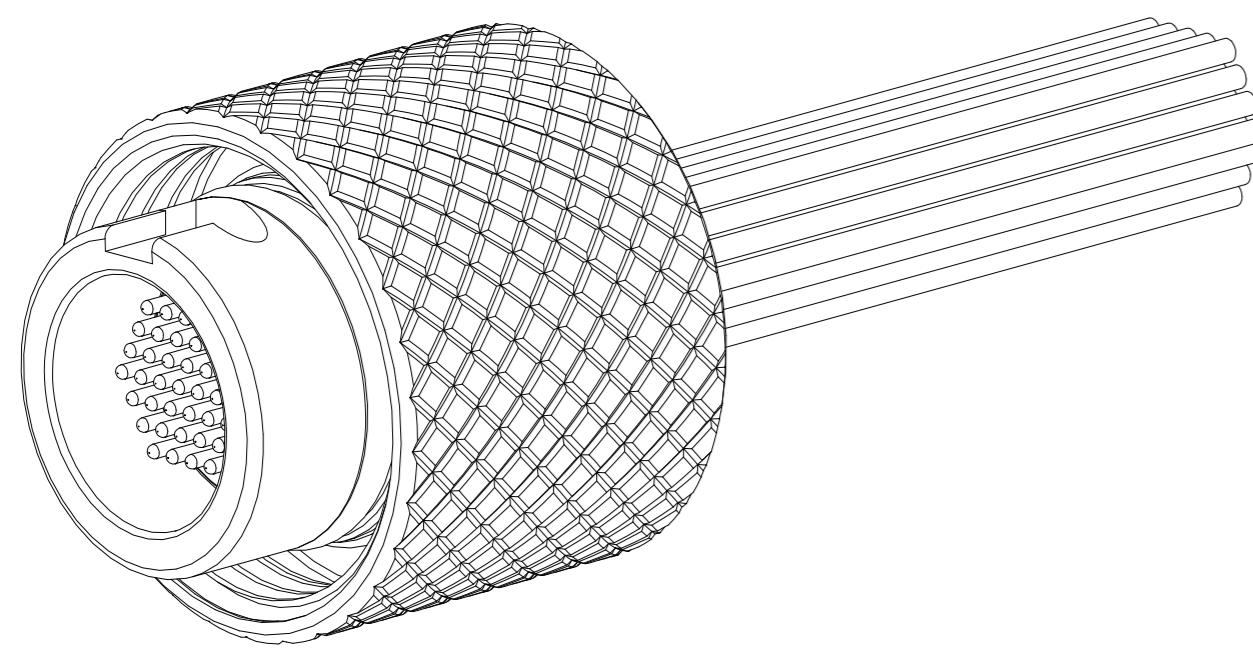

1 CONNECTOR BODY AND COUPLING NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E  
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E  
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067  
O-RING MATERIAL: FLUOROSILICONE

2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER

3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION

4 THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0034

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 20 MAY 99  
M. STORRY  
CHK 11 JUN 99  
E. PAULUS



TE Connectivity

PLUG ASSEMBLY,  
CIRCULAR, THREADED COUPLING,  
METAL, 44 POSITION

SIZE CAGE CODE DRAWING NO  
A2 OPJN9 C-1589065

RESTRICTED TO

1471-9 (3/11)

DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	± -		
1 PLC	± -		
2 PLC	± .010		
3 PLC	± .005		
4 PLC	± -	ANGLES ± 1°	
		APPLICATION SPEC	
		—	
MATERIAL	FINISH	WEIGHT	
SEE NOTES	SEE NOTES	—	
		CUSTOMER DRAWING	

SCALE 6:1 SHEET 1 OF 1 REV H

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[TCM044PC2DC003](#)