
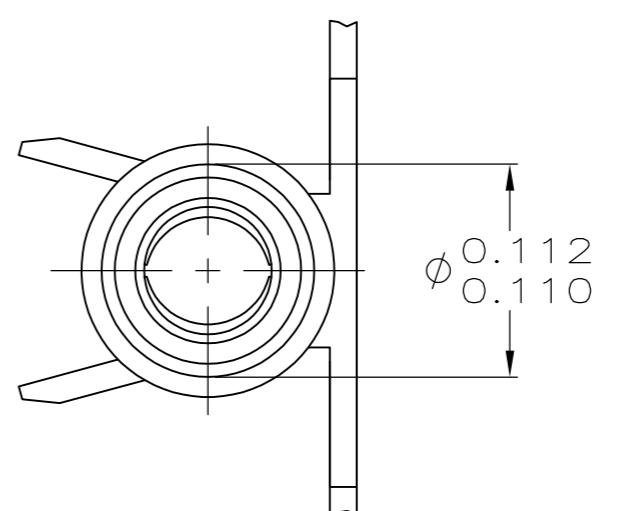


THIS DRAWING IS UNPUBLISHED.  
RELEASED FOR PUBLICATION  
ALL RIGHTS RESERVED.  
© COPYRIGHT - By -

LOC GE 00 DIST B1  
P LTR  
DESCRIPTION REVISED PER ECO-11-005030  
DATE 11MAR11 DWN APVD RK HMR

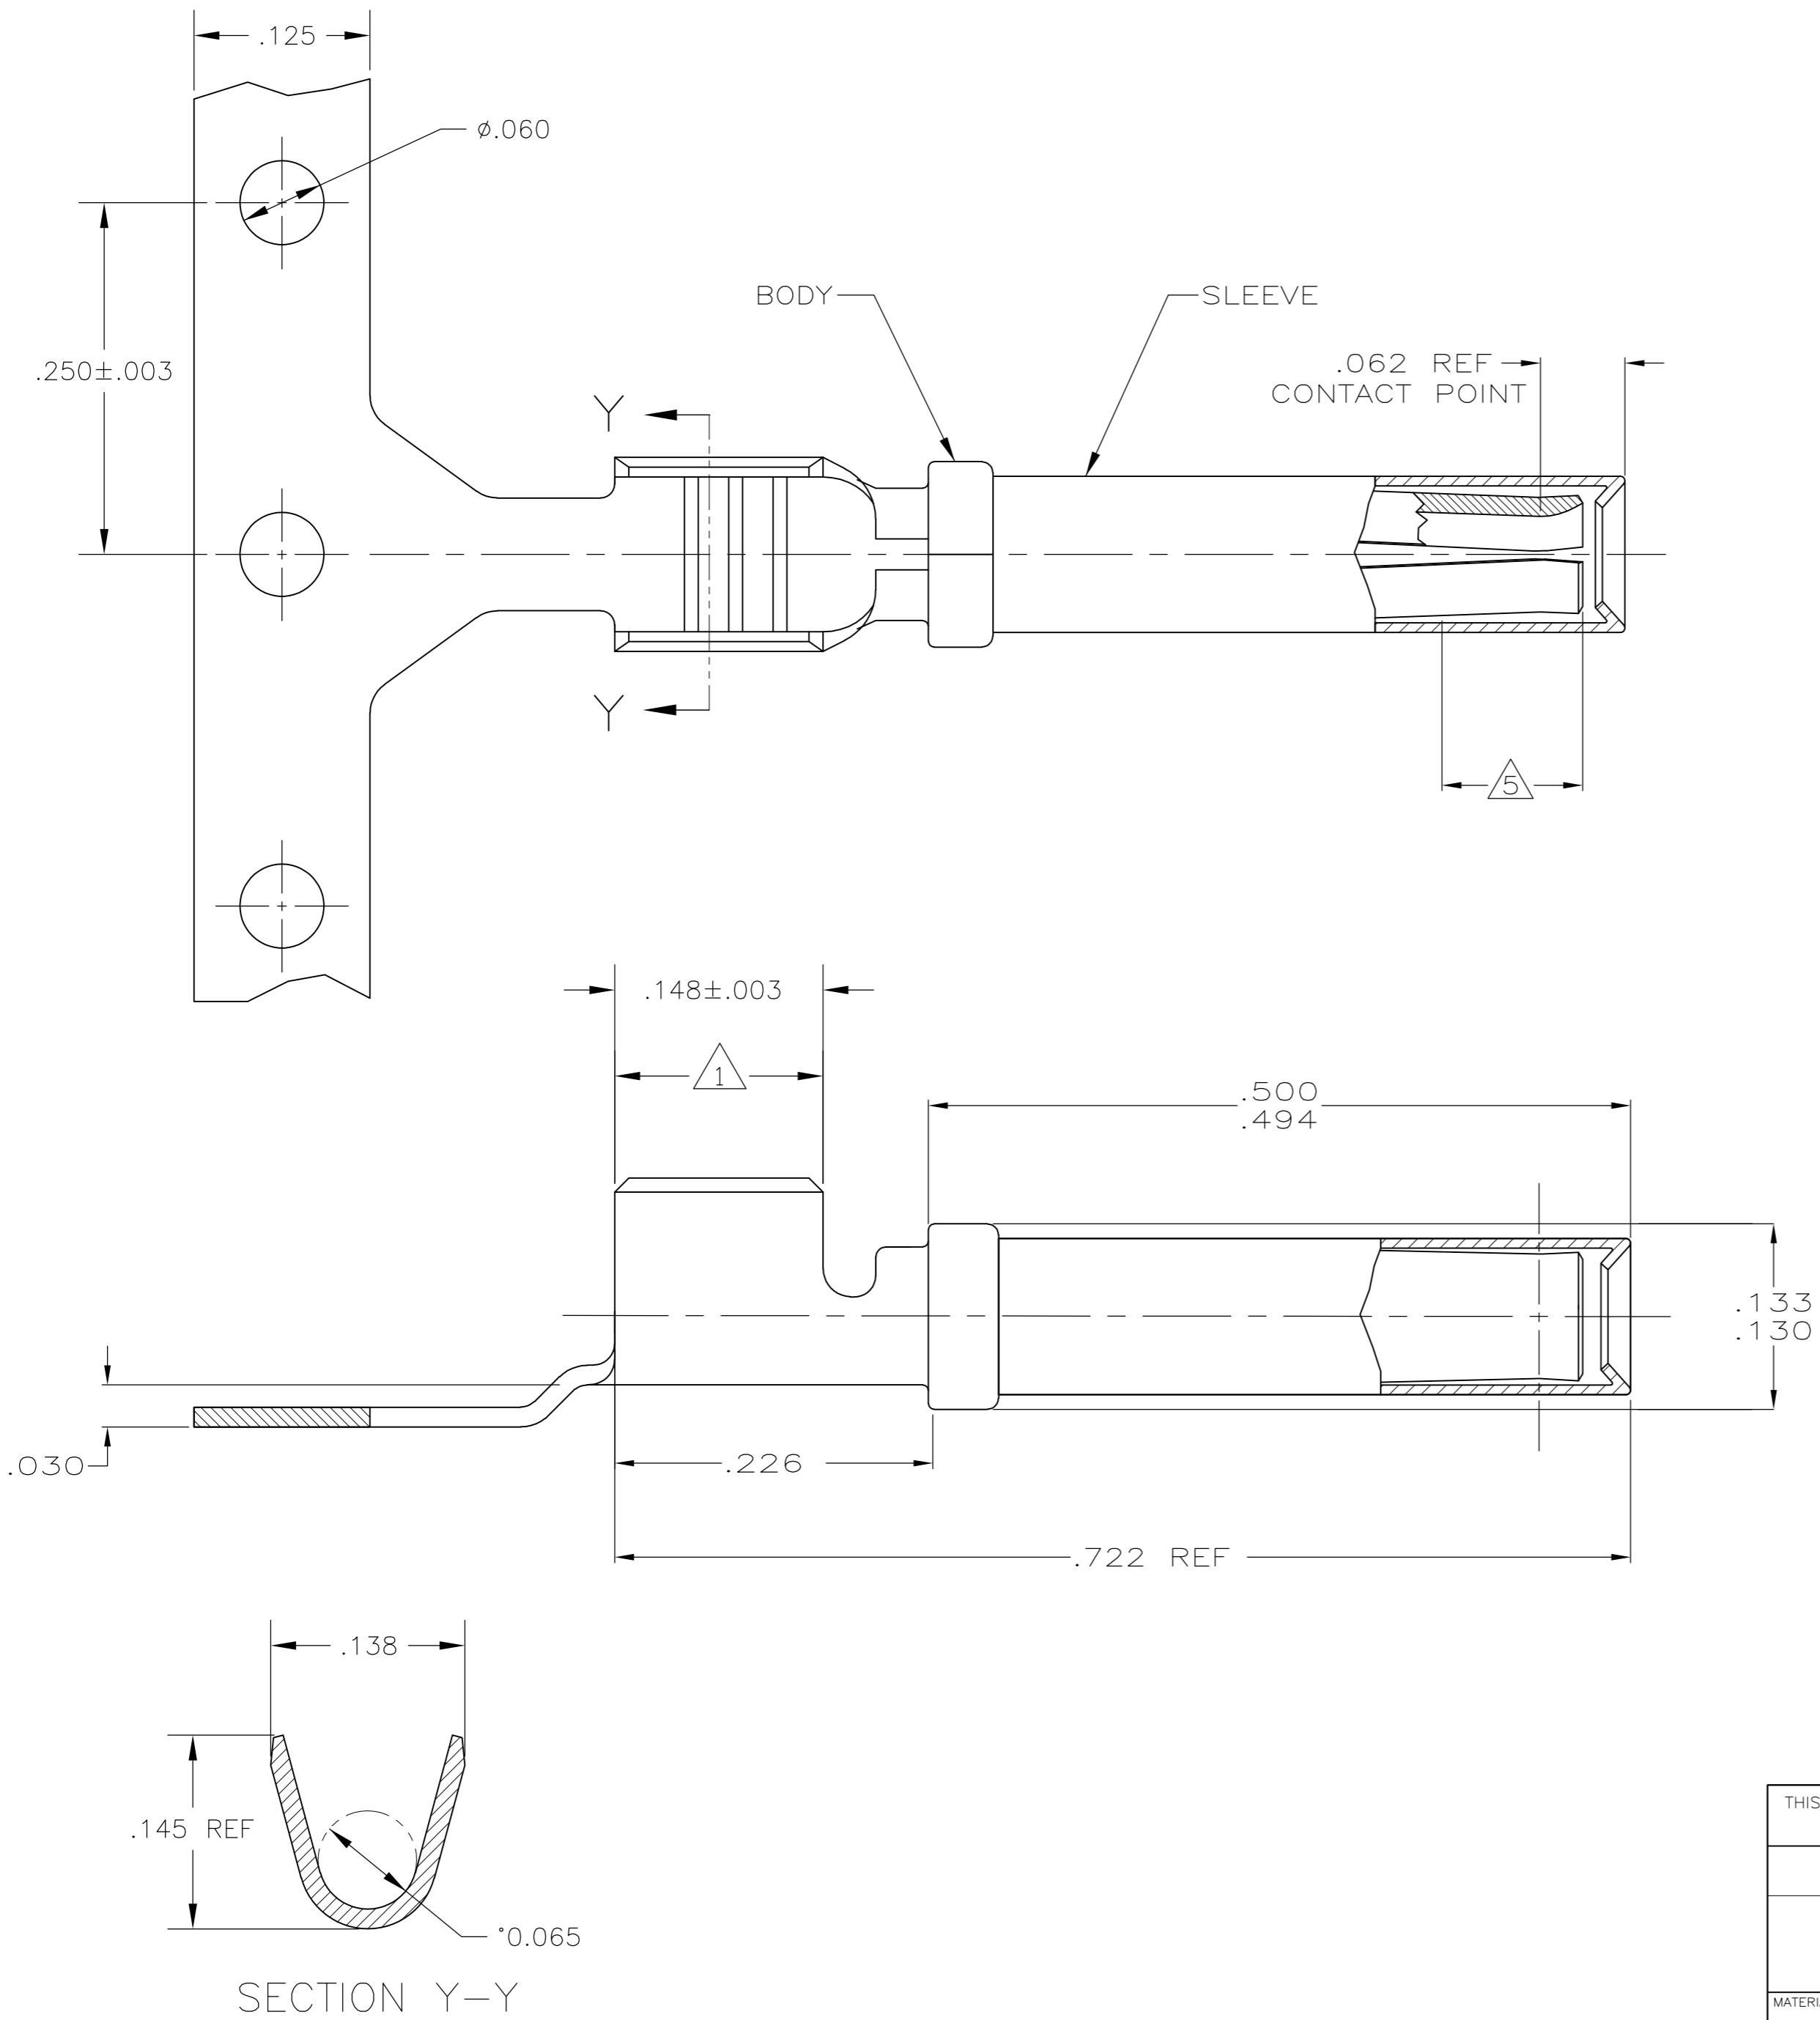

△ FINISH: PLATE 0.000100–0.000200 THK TIN IN LOCALIZED TIN PLATE AREA, ALL OVER 0.000030–0.000070 THK NICKEL.

△ SLEEVE: PASSIVATE PER SPEC. 112–230–2, METHOD I.

2. CONTACT WILL BE LUBED WITH LUBRICANT PER P/N 22014–4.

3. WIRE RANGE: 18–14 AWG SXL, GXL, AND TXL WIRE WITH INSL DIAMETERS OF 0.077–0.155 INCHES.

4. SLEEVE MUST WITHSTAND PULL-OFF FORCE IN DIRECTION PARALLEL TO CENTER OF TERMINAL OF 10 LBS. MINIMUM.

△ PLATE 0.000030 MIN THK SELECT GOLD IN LOCALIZED PLATE AREA.

△ FINISH: PLATE 0.000100–0.000200 THK TIN IN LOCALIZED TIN PLATE AREA, ALL OVER 0.000040–0.000080 THK NICKEL.

△ BODY MATERIAL: 0.014 THK COPPER ALLOY  
SLEEVE MATERIAL: 0.007 THK STAINLESS STEEL

THIS DRAWING IS A CONTROLLED DOCUMENT.		776491–2	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	± -	JR BUSSARD	13DEC2002
1 PLC	± -	CHK	13DEC2002
2 PLC	.02	MP TRULL	13DEC2002
3 PLC	.005	APVD	MP TRULL
4 PLC	± -	PRODUCT SPEC	—
		APPLICATION SPEC	—
MATERIAL	FINISH	WEIGHT	RESTRICTED TO
△ 7	△ 5 △ 6	—	A2 00779 C-776491
			ASSEMBLY, SOCKET CONTACT, TXL WIRE
			SIZE CAGE CODE DRAWING NO
			10:1 SHEET 1 OF 1 REV B1
			CUSTOMER DRAWING

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[776491-2](#)