

# SMT Power Inductors

Flat Coils – PG0871NL series



- Current Rating:** up to 28A<sub>pk</sub>
- Inductance Range:** 0.46μH to 10.5μH
- Height:** 6.4mm Max
- Footprint:** 7.6mm x 7.4mm Max

## Electrical Specifications @ 25°C — Operating Temperature - 40°C to +130°C<sup>1</sup>

Part Number	Inductance @ I <sub>rated</sub> <sup>2</sup> (μH TYP)	I <sub>rated</sub> <sup>3</sup> (A)	Controlled Electrical Specs		Saturation Current I <sub>sat</sub> <sup>5</sup> (A TYP)		Heating Current <sup>6</sup> I <sub>dc</sub> (A TYP)	Core Loss <sup>7</sup> Factor (K2)
			DCR <sup>4</sup> (mΩ) ±8%	Inductance @ 0A <sub>dc</sub> (μH ± 20%)	25°C	100°C		
PG0871.461NL	0.42	24.0	1.5	0.46	28.0	25.0	24.0	14.196
PG0871.681NL	0.64	19.0	2.3	0.68	24.5	20.0	19.0	10.647
PG0871.821NL	0.71	19.0	2.3	0.82	21.0	18.0	19.0	10.647
PG0871.102NL	0.80	17.5	2.3	1.00	17.5	15.5	19.0	10.647
PG0871.152NL	1.20	13.5	4.4	1.5	14	12.5	13.5	8.517
PG0871.222NL	2.00	9.5	7.6	2.20	12.0	10.5	9.5	7.098
PG0871.332NL	3.00	7.1	13.5	3.30	10.5	9.5	7.1	5.324
PG0871.472NL	4.50	6.7	17.0	4.70	9.3	8.0	6.7	4.259
PG0871.682NL	6.40	5.8	20.0	6.80	7.8	6.5	5.8	3.549
PG0871.922NL	8.80	4.9	30.0	9.20	6.7	5.5	4.9	3.042
PG0871.103NL	9.50	4.7	31.5	10.50	6.3	5.3	4.7	2.839

### NOTES:


- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- Inductance at I<sub>rated</sub> is a typical inductance value for the component taken at rated current.
- The rated current as listed is either the saturation current (@ 25°C) or the heating current depending on which value is lower.
- The DCR of the part is measured at an ambient temperature of 20°C±3°C from point a and b as shown below on the mechanical drawing.
- The saturation current, I<sub>sat</sub>, is the current at which the component inductance drop by 20% (typical) at an ambient temperature of 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- The heating current, I<sub>dc</sub>, is the DC current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical pcb and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test. Take note that the components' performance varies depending on the system condition. IT is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- Core loss approximation is based on published core data:  
 $Core\ Loss = K1 * (f)^{1.524} * (\Delta B)^{2.422}$  in mW  
 K1 = 71.56 E-4  
 $\Delta B = K2 * V_{usec}$  in mT  
 f = switching frequency in MHz  
 K1 & K2 = core loss factors  
 V = Voltage across the component in V  
 $V_{usec} = V * D / f$   
 D = Duty cycle
- Unless otherwise specified, all testing is made at 100kHz, 0.1Vac
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PG0871.222NL becomes PG0871.222NLT). Pulse complies to industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=16.0mm), pitch (Po=12.0mm) and depth (Ko=6.8 mm).
- The core is a conductive material so care should be taken when mounting this component over an exposed via or if the voltage across the terminals exceeds 24V. Trickle current through the core material may generate additional losses and potential overheating. Please contact Pulse to discuss an alternative solution if required.

# SMT Power Inductors


Flat Coils - PG0871NL series



## Mechanicals

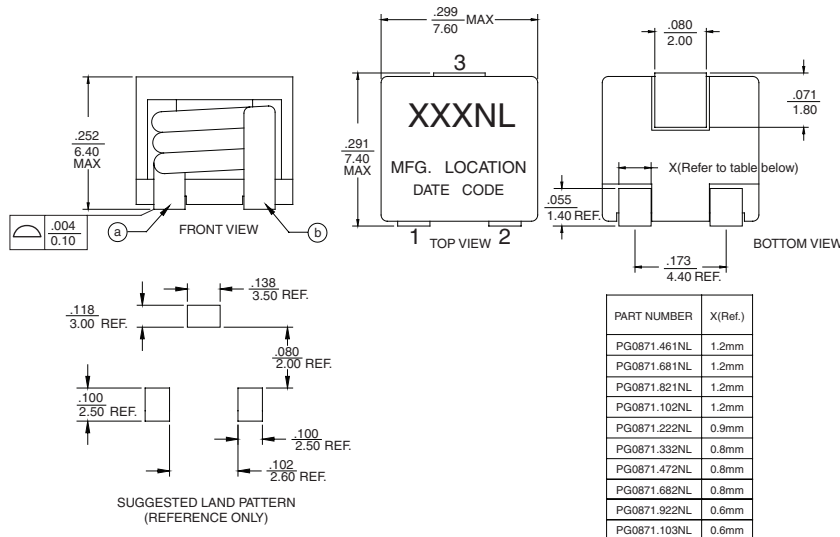

## Schematics




\* Pin 3 is for mechanical support only and has no internal electrical connection.


Weight ..... 1.1 grams  
Tape & Reel ..... .700/reel

Dimensions:      Inches  
                       mm  
Unless otherwise specified,  
all tolerances are ± .010  
  0,25

## Typical Inductance vs DC Bias @25°C and 100°C

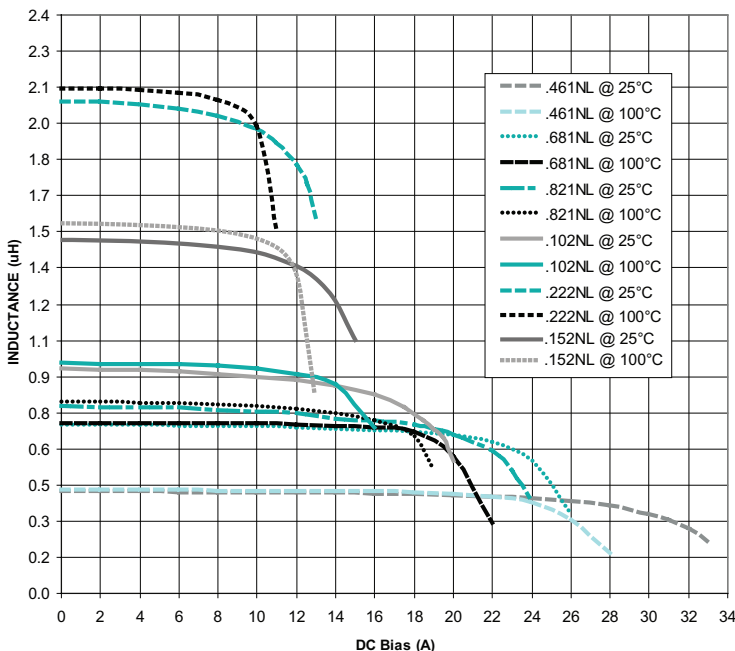

## Typical Inductance vs DC Bias @25°C and 100°C

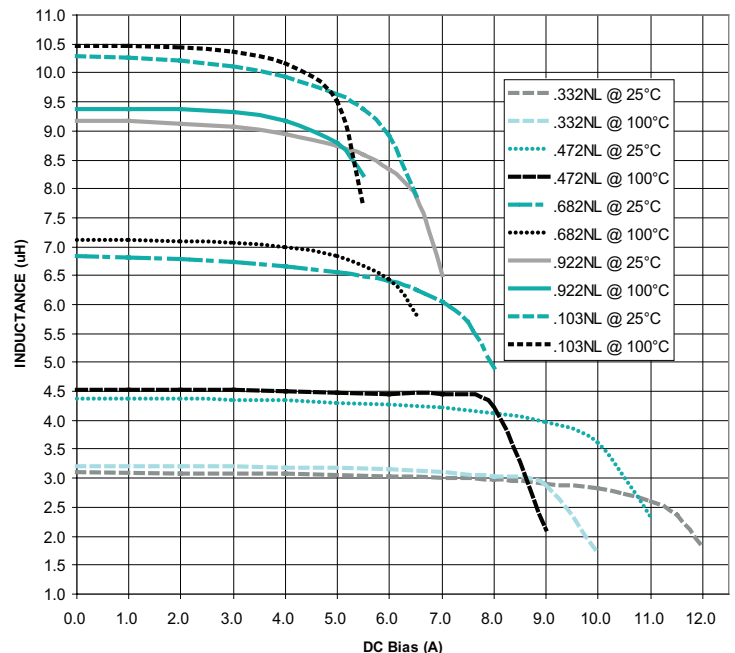

## For More Information

**Pulse Worldwide Headquarters**  
12220 World Trade Drive  
San Diego, CA 92128  
U.S.A.

**Pulse Europe**  
Pulse Electronics GmbH Am  
Rottland 12  
58540 Meinerzhagen  
Germany

**Pulse China Headquarters**  
B402, Shenzhen Academy of  
Aerospace Technology Bldg.  
10th Kejinan Road  
High-Tech Zone  
Nanshan District  
Shenzhen, PR China 518057

**Pulse North China**  
Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Road West  
Shanghai 200336  
China

**Pulse South Asia**  
135 Joo Seng Road  
#03-02  
PM Industrial Bldg.  
Singapore 368363

**Pulse North Asia**  
3F, No. 198  
Zhongyuan Road  
Zhongli City  
Taoyuan County 320  
Taiwan R. O. C.

TEL: 858 674 8100  
FAX: 858 674 8262

Tel: 49 2354 777 100  
Fax: 49 2354 777 168

Tel: 86 755 33966678  
Fax: 86 755 33966700

Tel: 86 21 62787060  
Fax: 86 2162786973

Tel: 65 6287 8998  
Fax: 65 6287 8998

Tel: 886 3 4356768  
Fax: 886 3 4356823 (Pulse)  
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2016. Pulse Electronics, Inc. All rights reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PG0871.922NLT](#) [PG0871.152NLT](#) [PG0871.461NLT](#) [PG0871.821NLT](#) [PG0871.682NLT](#) [PG0871.103NLT](#)  
[PG0871.681NLT](#) [PG0871.332NLT](#) [PG0871.222NLT](#) [PG0871.102NLT](#) [PG0871.472NLT](#)