

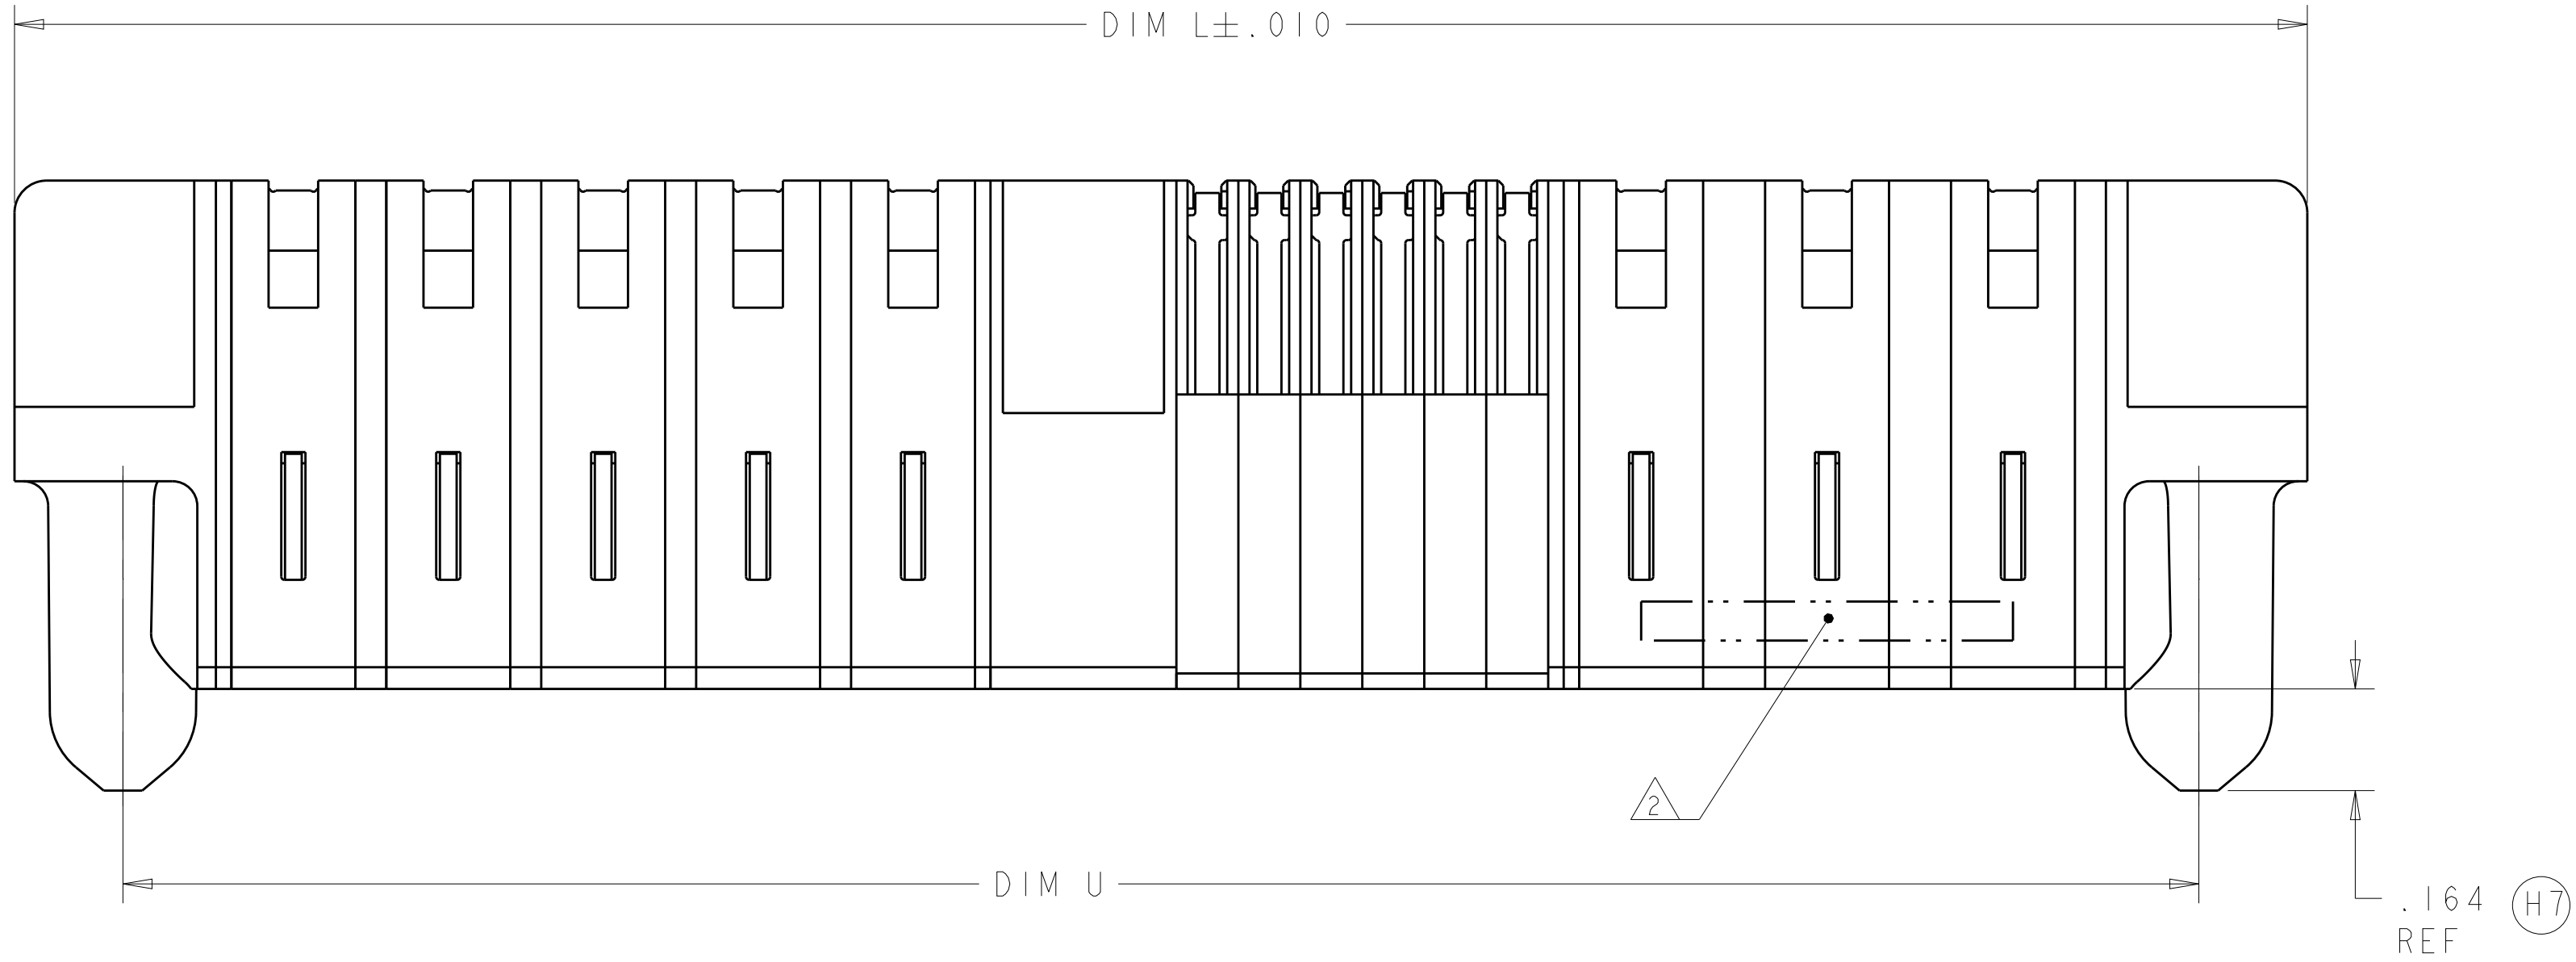
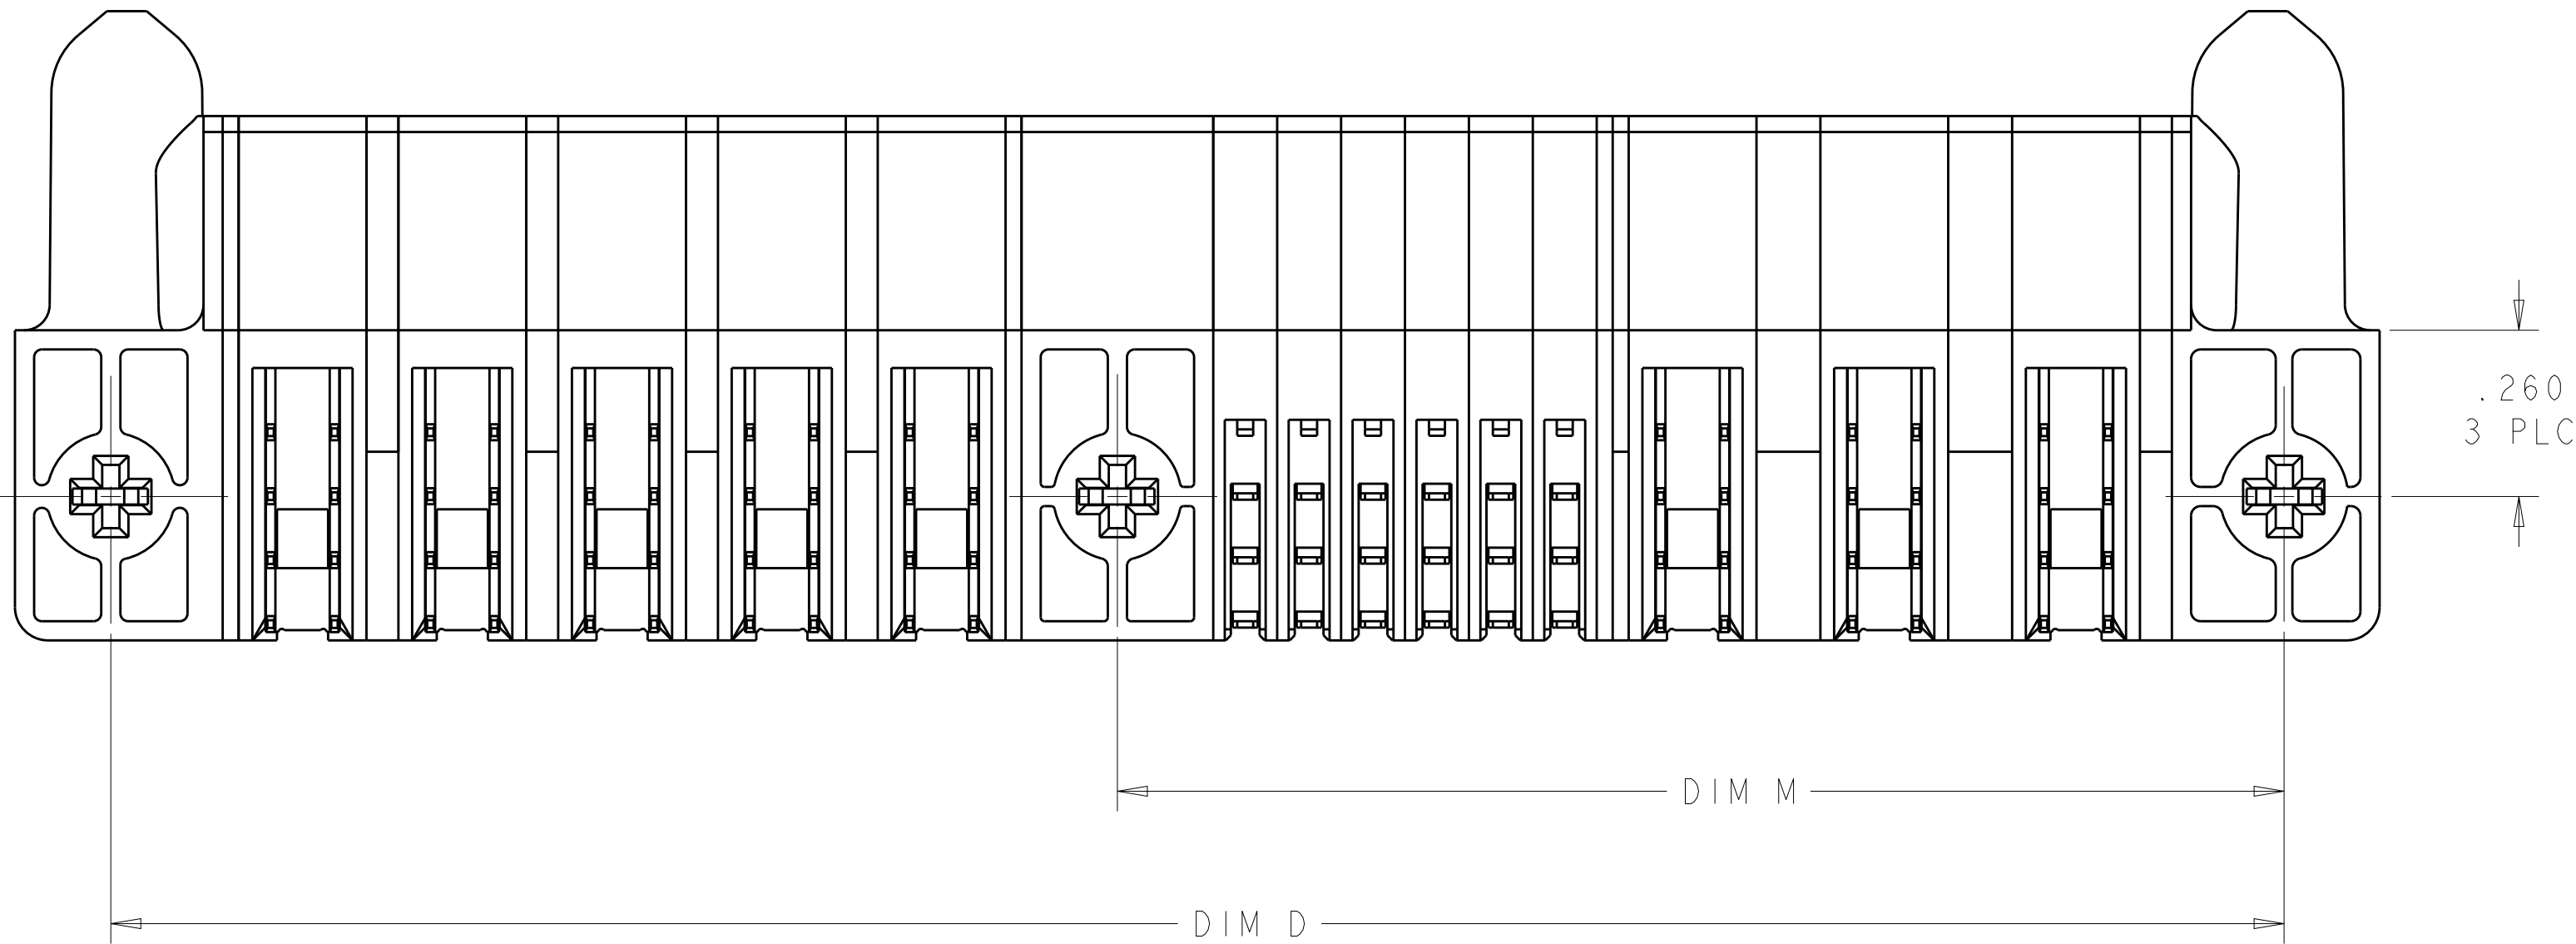


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00		J1	REV PER ECR-12-016975	25SEP2012	CZ
			J3	ADDED NEW DASH NUMBER 4-0	01FEB2013	SZ
			J5	ADDED NEW DASH NUMBER 4-1	25FEB2014	SZ

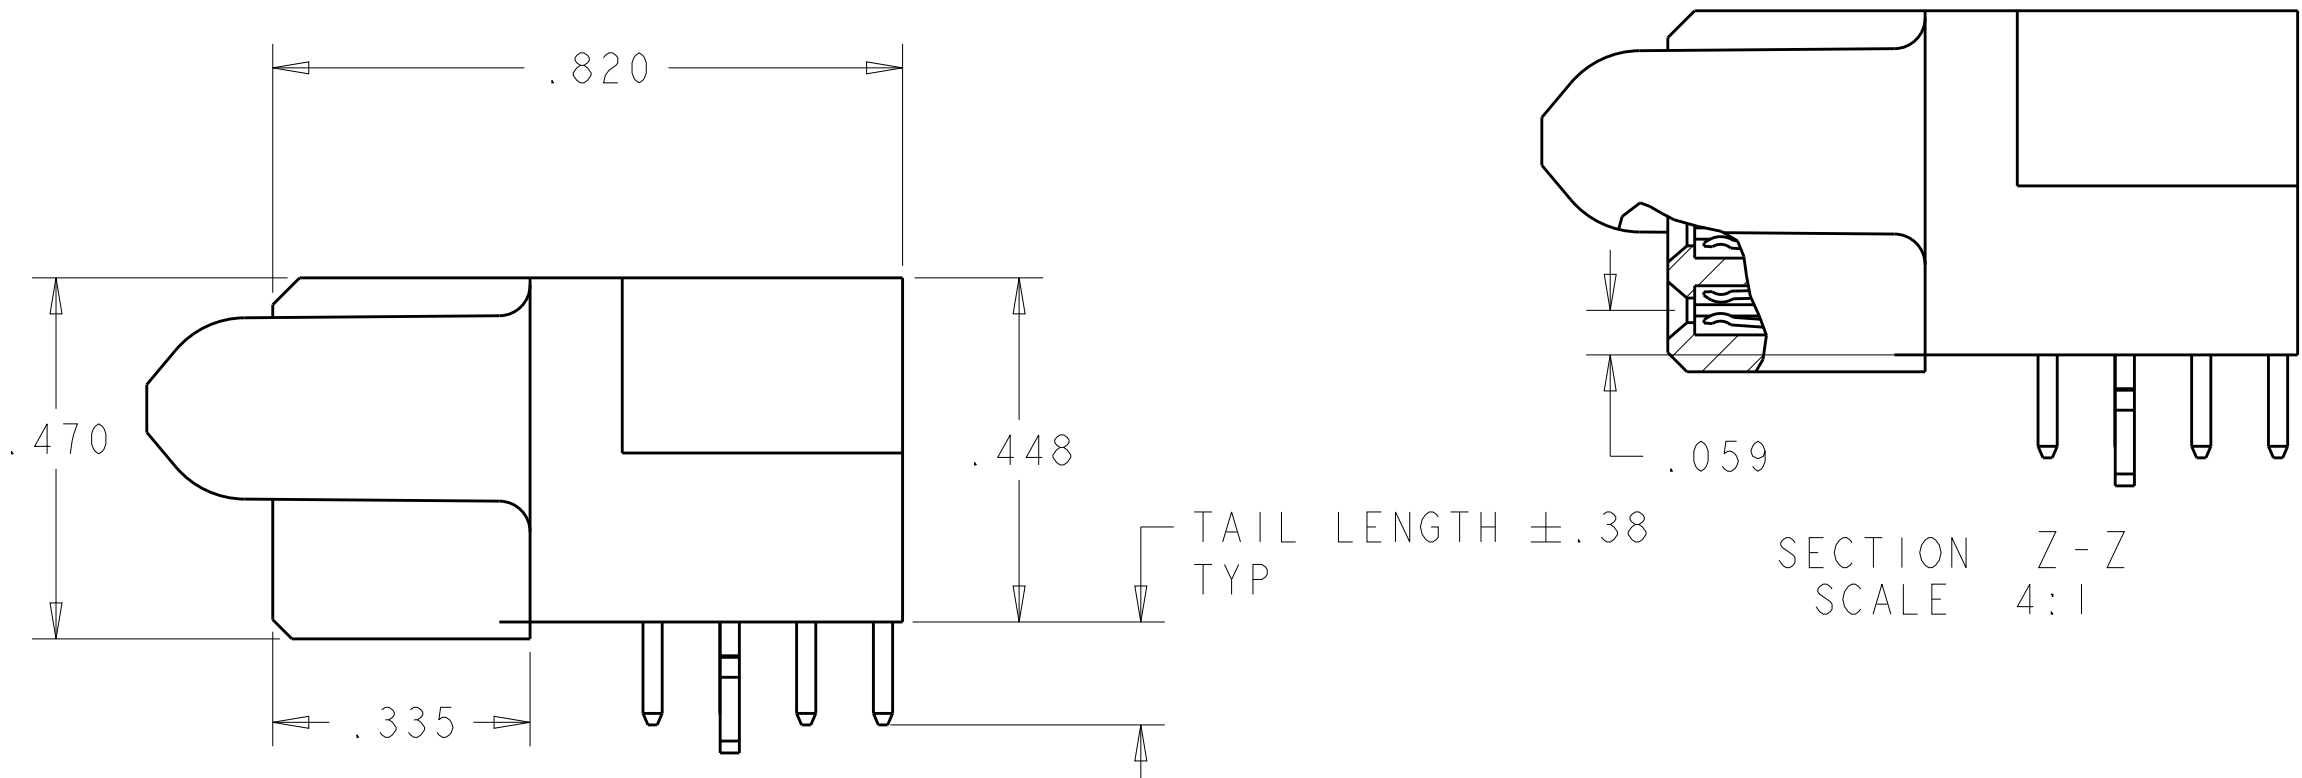

- 1 OPTIONAL CENTER MODULE, WITH .150 THRU HOLE OR HOLD DOWN FEATURE.
- 2 "AMP", PART NUMBER AND DATE CODE TO BE MARKED
- 3 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0.
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- 5 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 6 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 8 PCB - .0453±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 DIAMETER HOLE

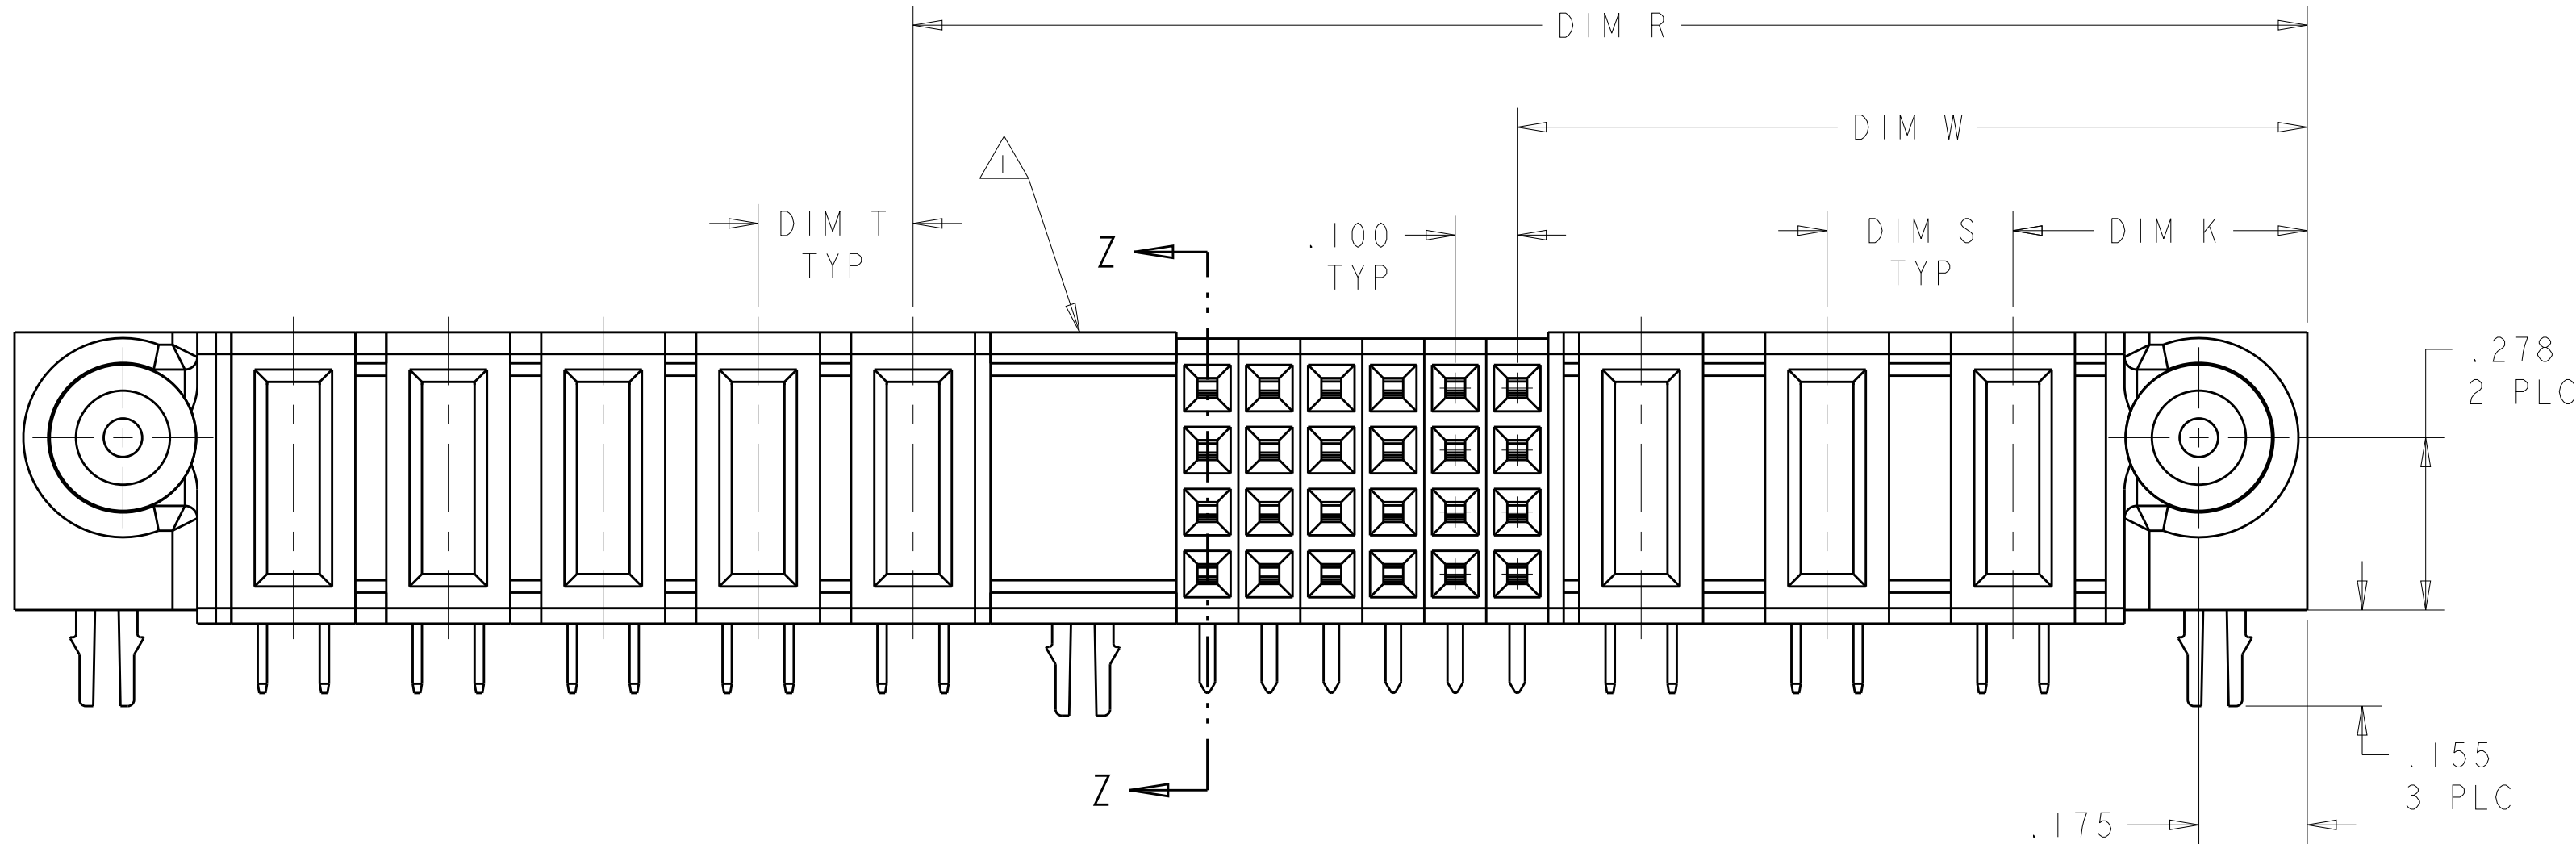

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 21FEB05	 TE Connectivity	
		CHK M.PERCHEKKE 21FEB05		
DIMENSIONS: INCHES		APVD M.PERCHEKKE	NAME	
		PRODUCT SPEC	RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		108-1973		
		APPLICATION SPEC		
		114-13038		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT -	SIZE CAGE CODE DRAWING NO	
0 PLC ±.01		-	A100779C=6450170	
1 PLC ±.01				
2 PLC ±.01				
3 PLC ±.005				
4 PLC ±.002			RESTRICTED TO	
ANGLES ±.0020				
FINISH #2		SCALE 4:1 SHEET 1 OF 13 REV J5		
MATERIAL		CUSTOMER DRAWING		


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

J4

2.650	.200	.250	1.550	.875	2.700	-	3.000	.450	2P + 24S + 6P	4-6450170-1
3.100	.250	.250	2.250	1.875	3.150	-	3.450	.450	6P + 12S + 4P	4-6450170-0
1.900	.250	.300	1.550	1.275	1.950	-	2.250	.475	3ACP + 8S + 2P	3-6450170-9
1.800	-	-	1.700	.625	1.850	-	2.150	.450	1P + 40S + 1P	3-6450170-8
1.600	-	-	1.500	.625	1.650	-	1.950	.450	1P + 32S + 1P	3-6450170-7
1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	3-6450170-6
1.550	.250	.250	1.200	.900	1.600	-	1.900	.450	2P + 8S + 2P	3-6450170-5
2.350	.250	.250	1.250	.875	2.400	-	2.700	.450	2P + 12S + 5P	3-6450170-4
2.325	.250	.300	1.975	1.600	2.375	-	2.675	.450	4ACP + 12S + 2P	3-6450170-3
1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	3-6450170-1
2.300	.250	.300	1.950	1.275	2.350	-	2.650	.450	3ACP + 24S + 2P	3-6450170-0
2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	2-6450170-9
2.300	.250	.300	1.950	1.275	2.350	-	2.650	.450	3ACP + 24S + 2P	2-6450170-8
2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	2-6450170-7
1.950	.250	.250	1.600	1.125	2.000	-	2.300	.450	3P + 16S + 2P	2-6450170-6
1.300	-	-	1.200	.675	1.350	-	1.650	.450	1P + 16S + 1P	2-6450170-0
2.200	.250	.250	1.350	.875	2.250	-	2.550	.450	2P + 16S + 4P	1-6450170-9
2.800	.300	.250	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	1-6450170-8
3.000	.250	.250	2.150	1.425	3.050	-	3.350	.450	4P + 24S + 4P	1-6450170-4
2.600	.200	.200	1.925	1.175	2.650	-	2.950	.425	4P + 28S + 4P	1-6450170-1
1.575	-	-	1.425	.700	1.625	-	1.925	.475	1P + 24S + 1P	1-6450170-0
2.500	.250	.250	2.150	.875	2.550	-	2.850	.450	2P + 48S + 2P	6450170-9
3.300	.250	.300	1.950	1.275	3.350	-	3.650	.475	3ACP +24S + 6P	6450170-8
1.400	.250	.250	1.300	.625	1.450	-	1.750	.450	1P + 24S + 1P	6450170-6
2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	6450170-5
4.350	.250	.250	3.500	2.625	4.400	-	4.700	.450	9P + 32S + 4P	6450170-4
3.650	.250	.300	2.550	1.275	3.700	-	4.000	.475	3ACP + 48S + 5P	6450170-3
3.050	.250	.300	1.950	1.275	3.100	-	3.400	.475	3ACP +24S + 5P	6450170-2
2.550	.250	.300	2.200	1.525	2.600	-	2.900	.475	3ACP+1P+24S+2P	6450170-1
DIM U	DIM T	DIM S	DIM R	DIM W	DIM D	DIM M	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±.01
±.005
±.0020
#2°
-

DWN
R.GRZYBOWSKI

CHK
M.PERCHEKKE

APVD
M.PERCHEKKE

PRODUCT SPEC
108-1973

APPLICATION SPEC
114-13038

WEIGHT
-

CUSTOMER DRAWING

21FE805

21FE805

-

NAME
RIGHT ANGLE RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450170

RESTRICTED TO
-



SCALE
4:1


SHEET
2


OF
13

REV
J5


4805 (3/11)

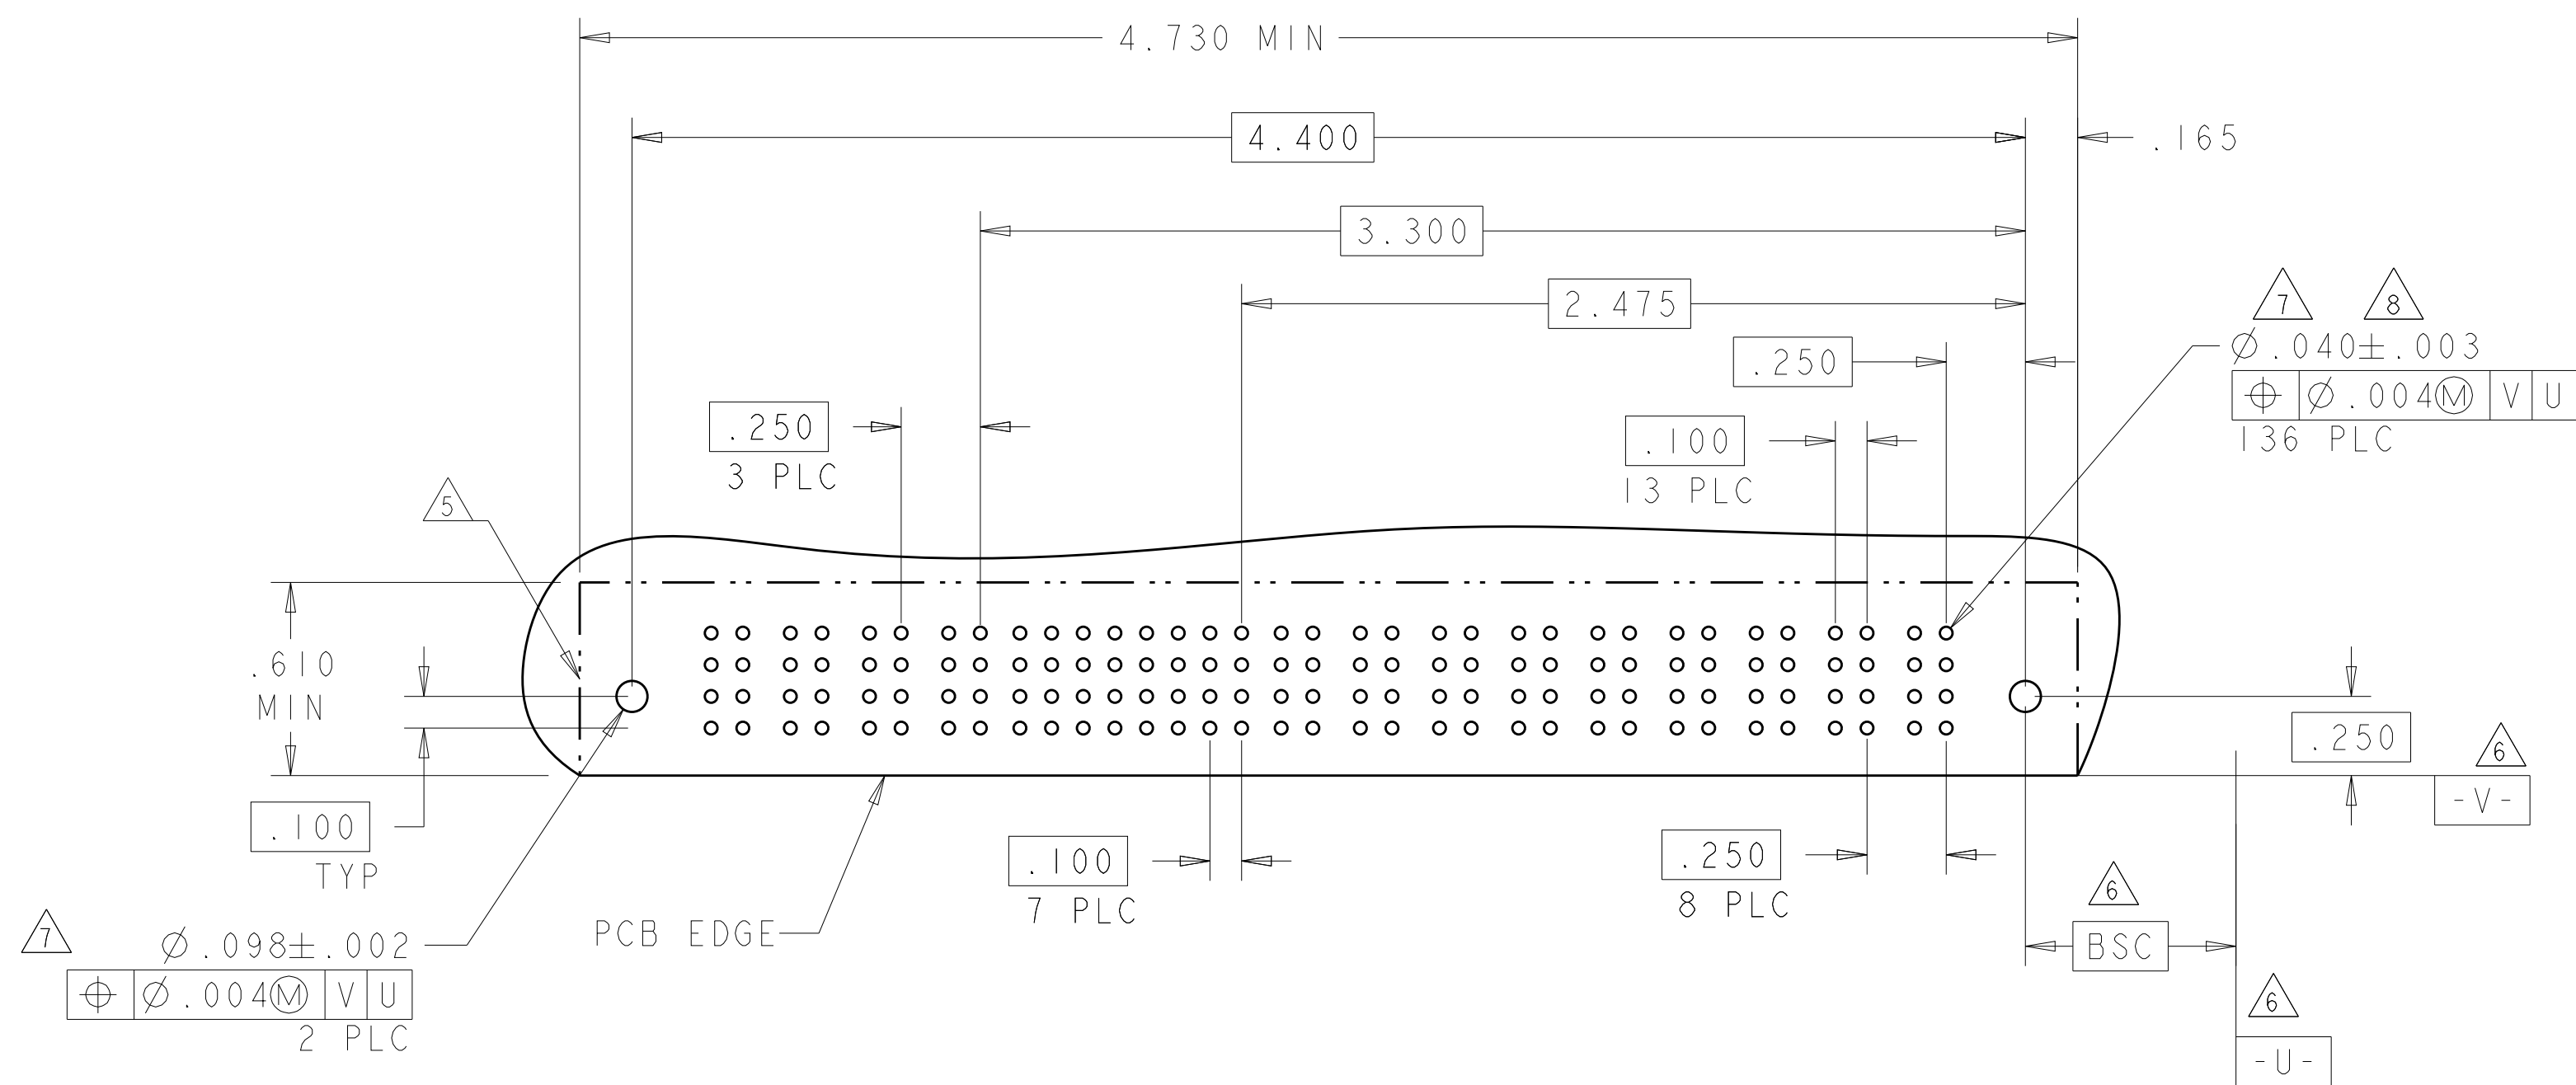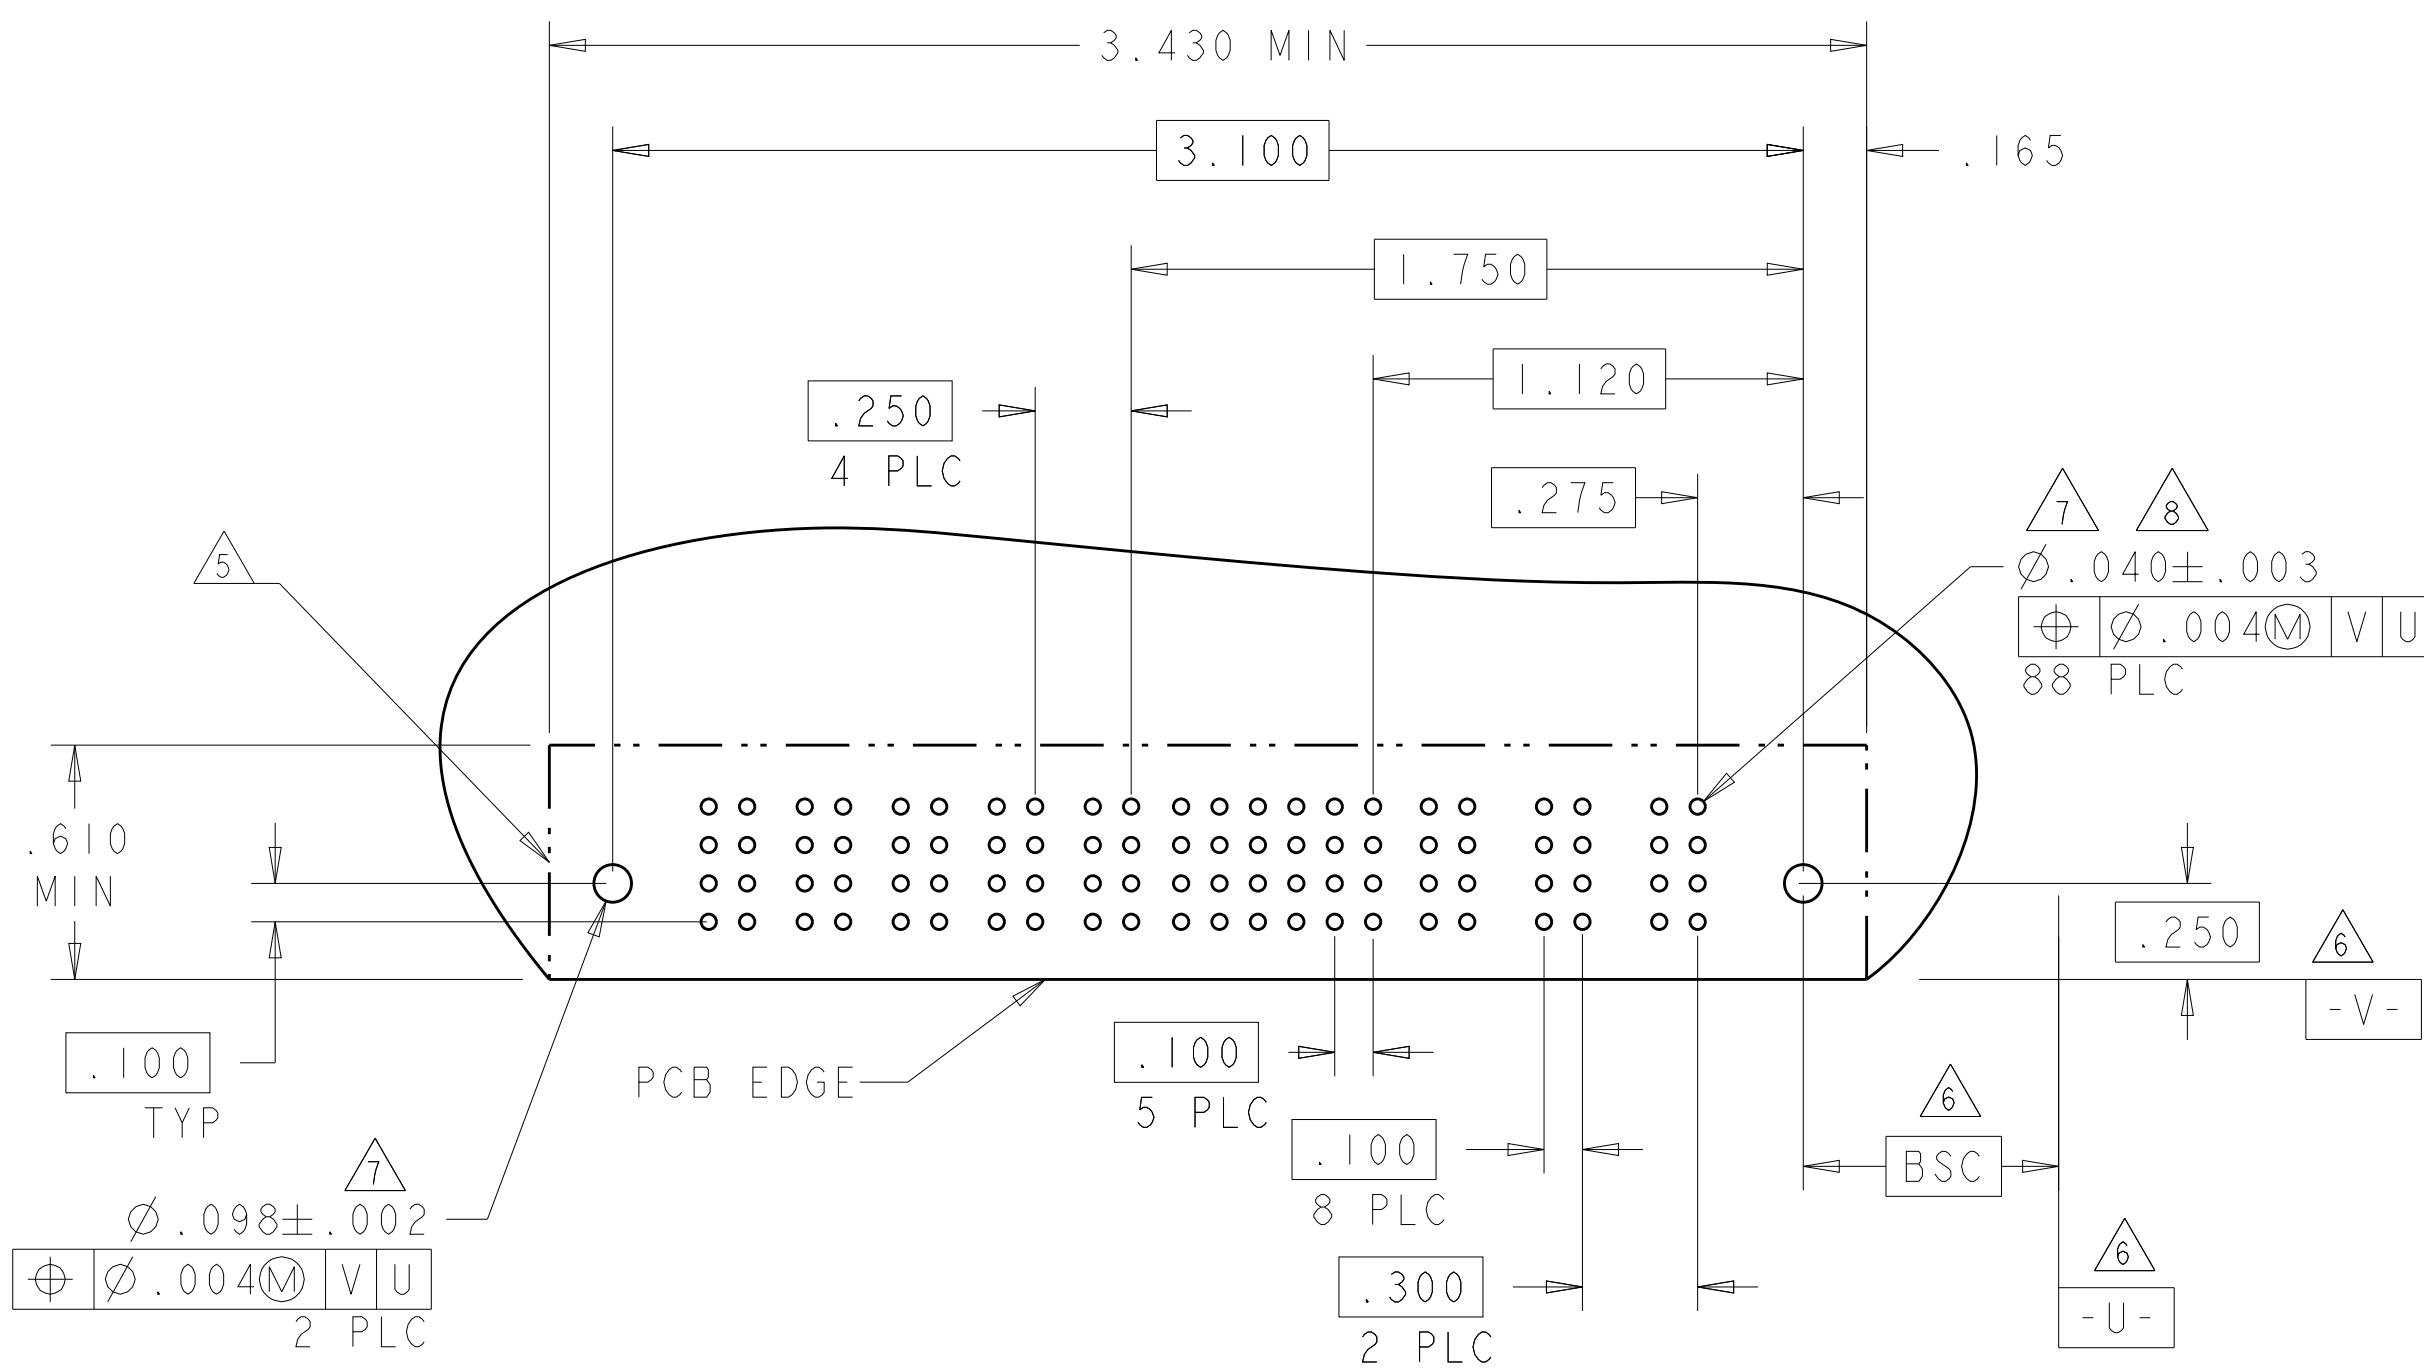


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: R. GRZYBOWSKI 21FEB05 CHK: M. PERCHERKE 21FEB05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES 42°		NAME: RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		APVD: M. PERCHERKE PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE: CAGE CODE: DRAWING NO: A100779C6450170	
MATERIAL: - FINISH: -		WEIGHT: -		RESTRICTED TO: -	
CUSTOMER DRAWING				SCALE: 1:1 SHEET 3 OF 13 REV. 1	

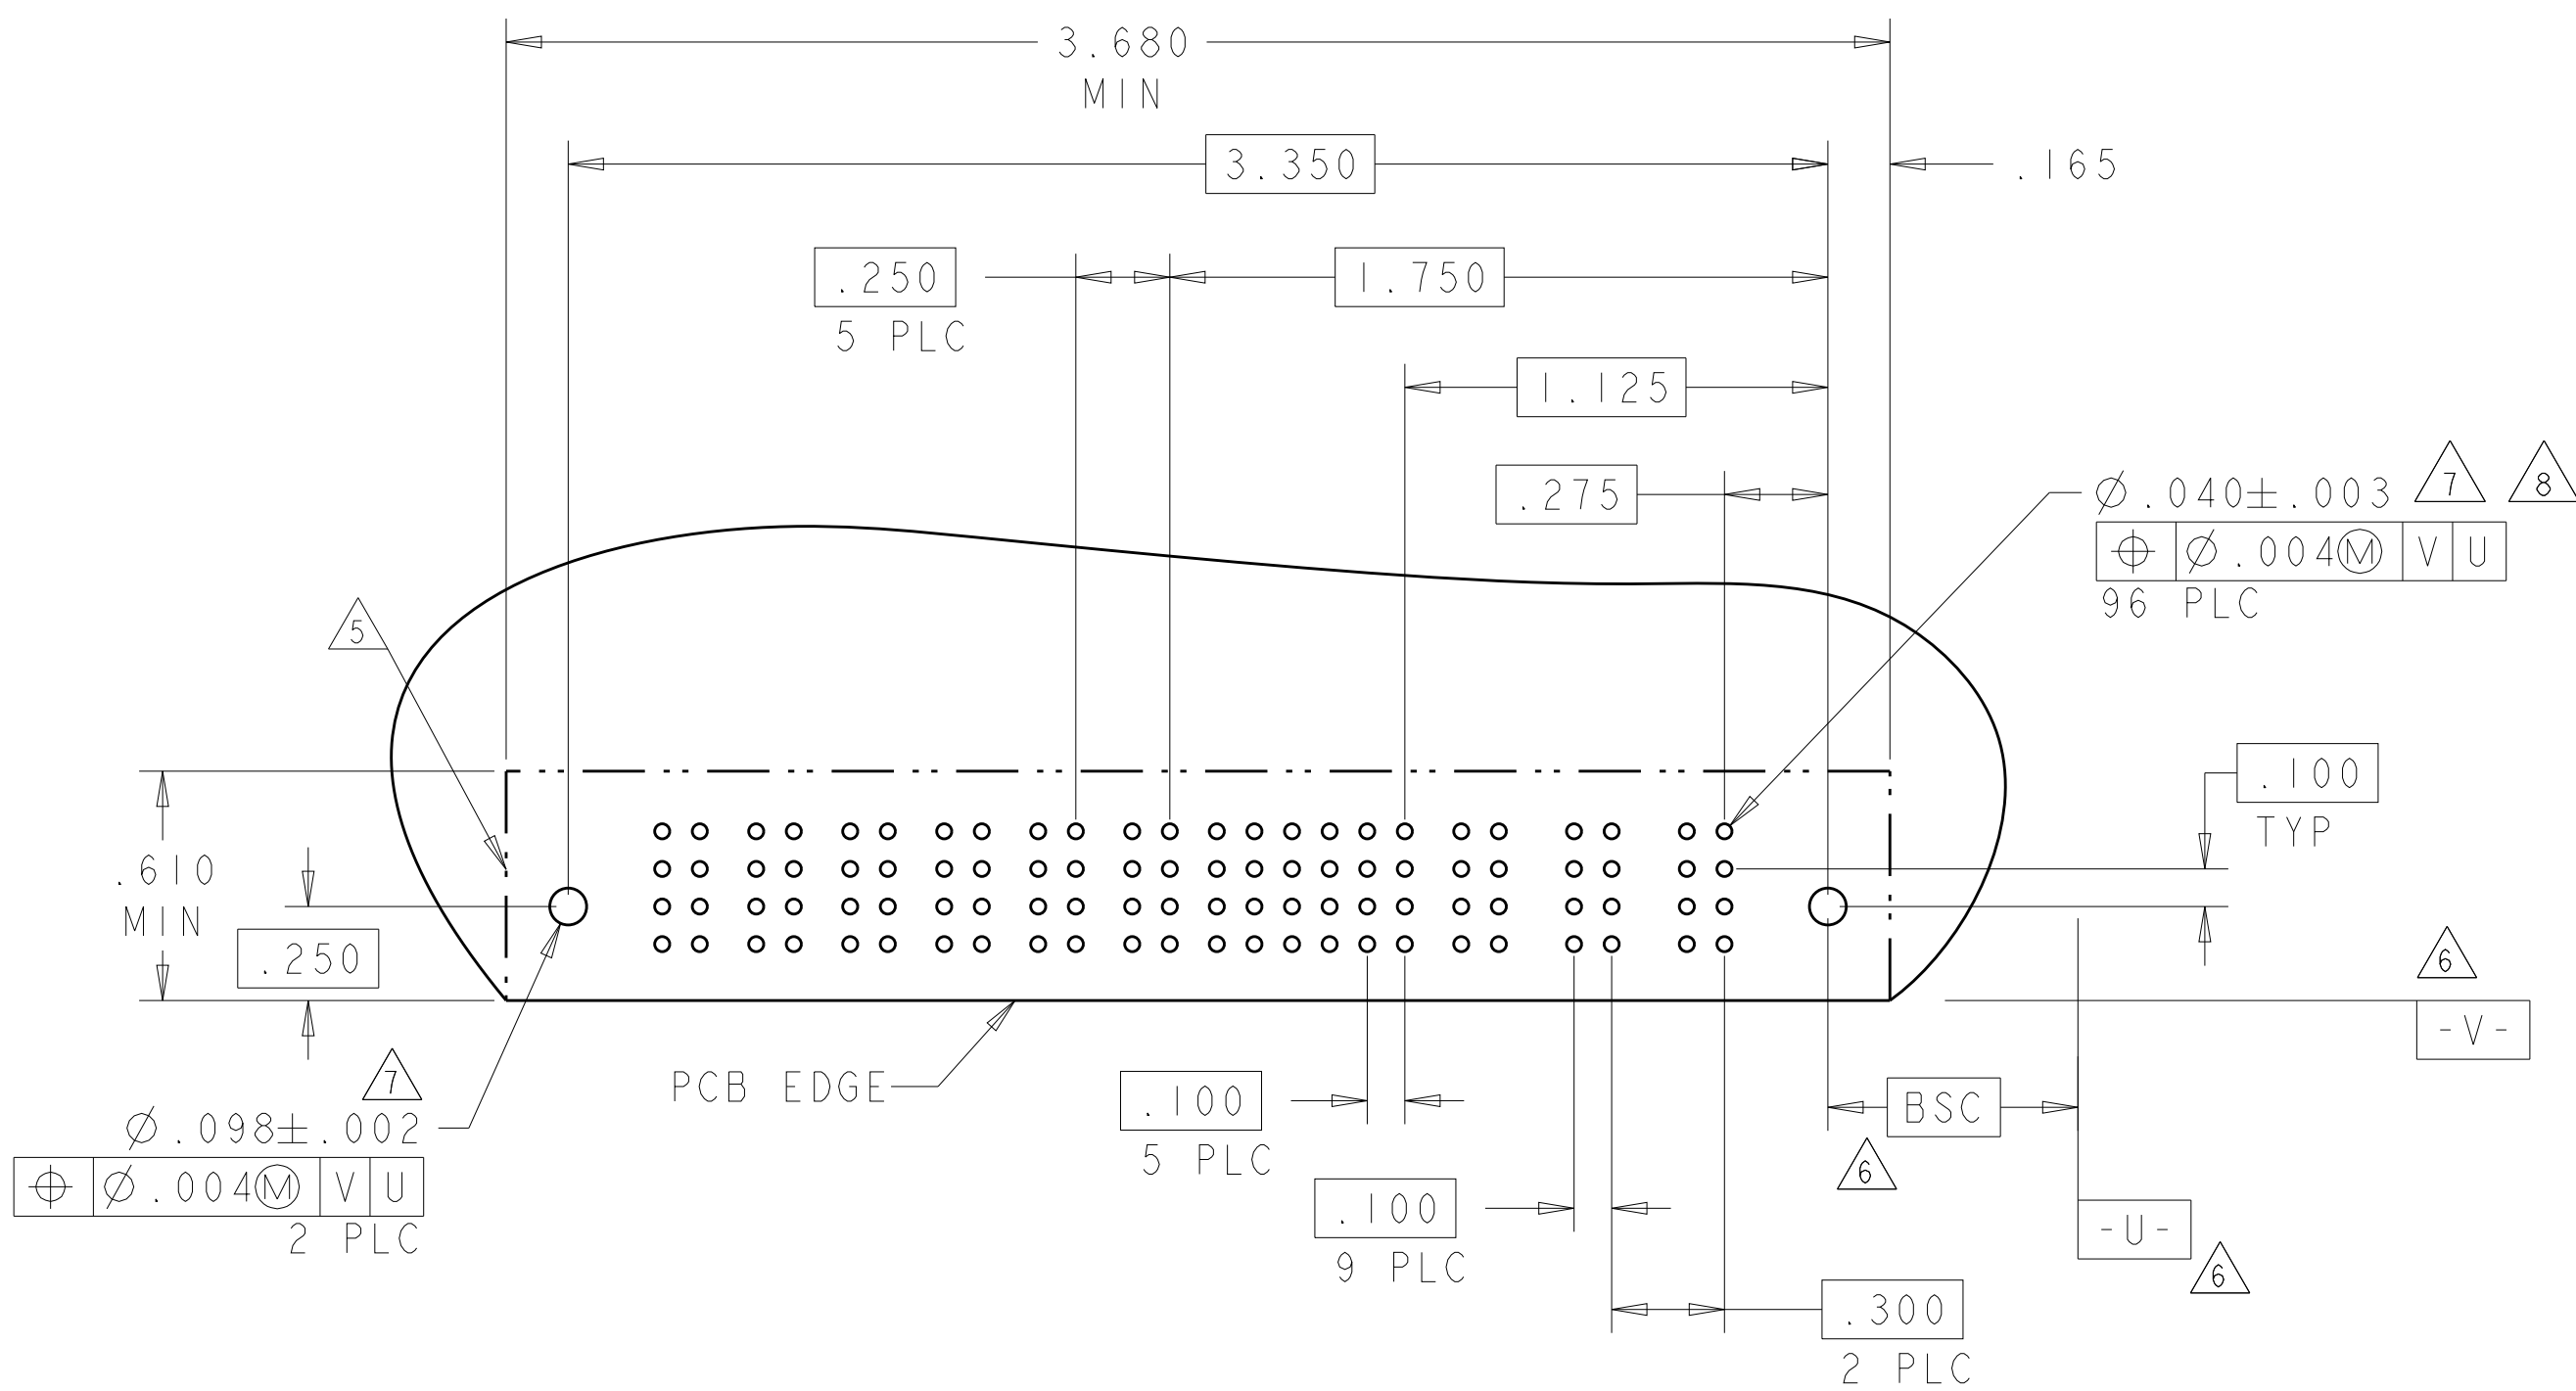[illegible]

PART NUMBER	ROWS		POWER		SIGNAL										POWER						
			P4	P3	12	11	10	9	8	7	6	5	4	3	2	1		P2	P1		
6450170-9	D C B A		RW	RA	H	H	H	H	H	H	H	H	H	H	H	H	H	RW	RA		
					G	G	G	G	G	G	G	G	G	G	G	G	G				G
					F	F	F	F	F	F	F	F	F	F	F	F	F				F
					E	E	E	E	E	E	E	E	E	E	E	E	E				E
2P + 48S + 2P																					

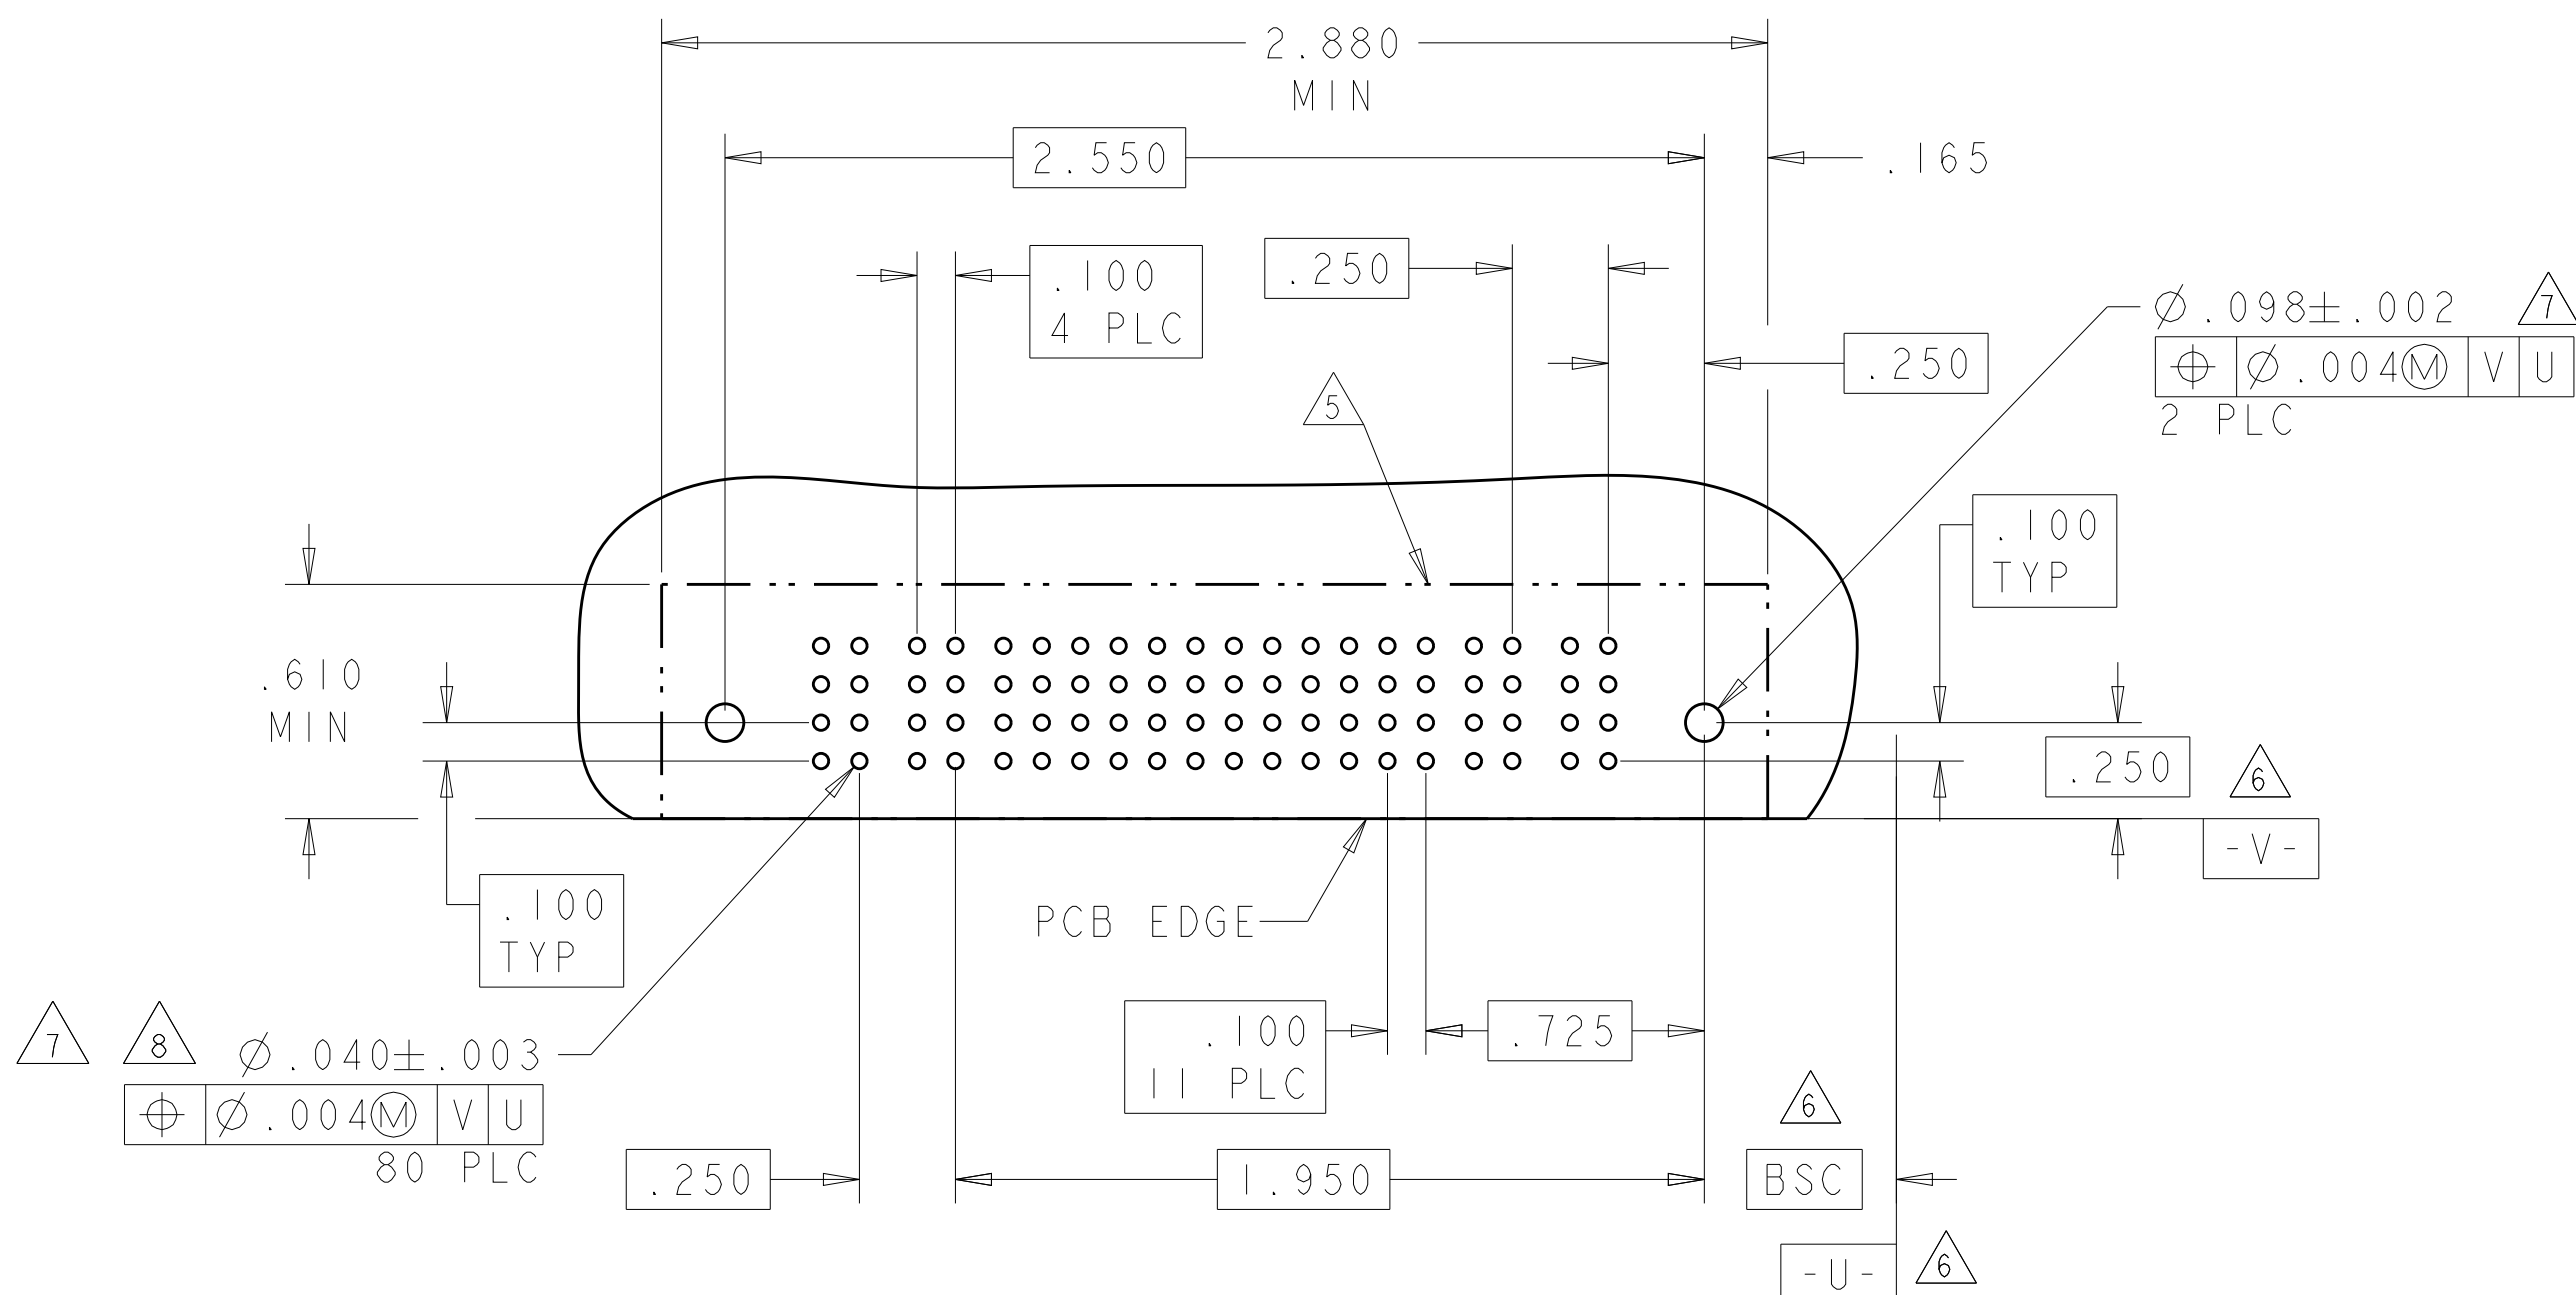
4805 (3/11)

PART NUMBER	ROWS	POWER		SIGNAL			POWER		
		P5	P4	4	3	2	1	P3	P2
2-6450170-6	D	                                                                                                                							

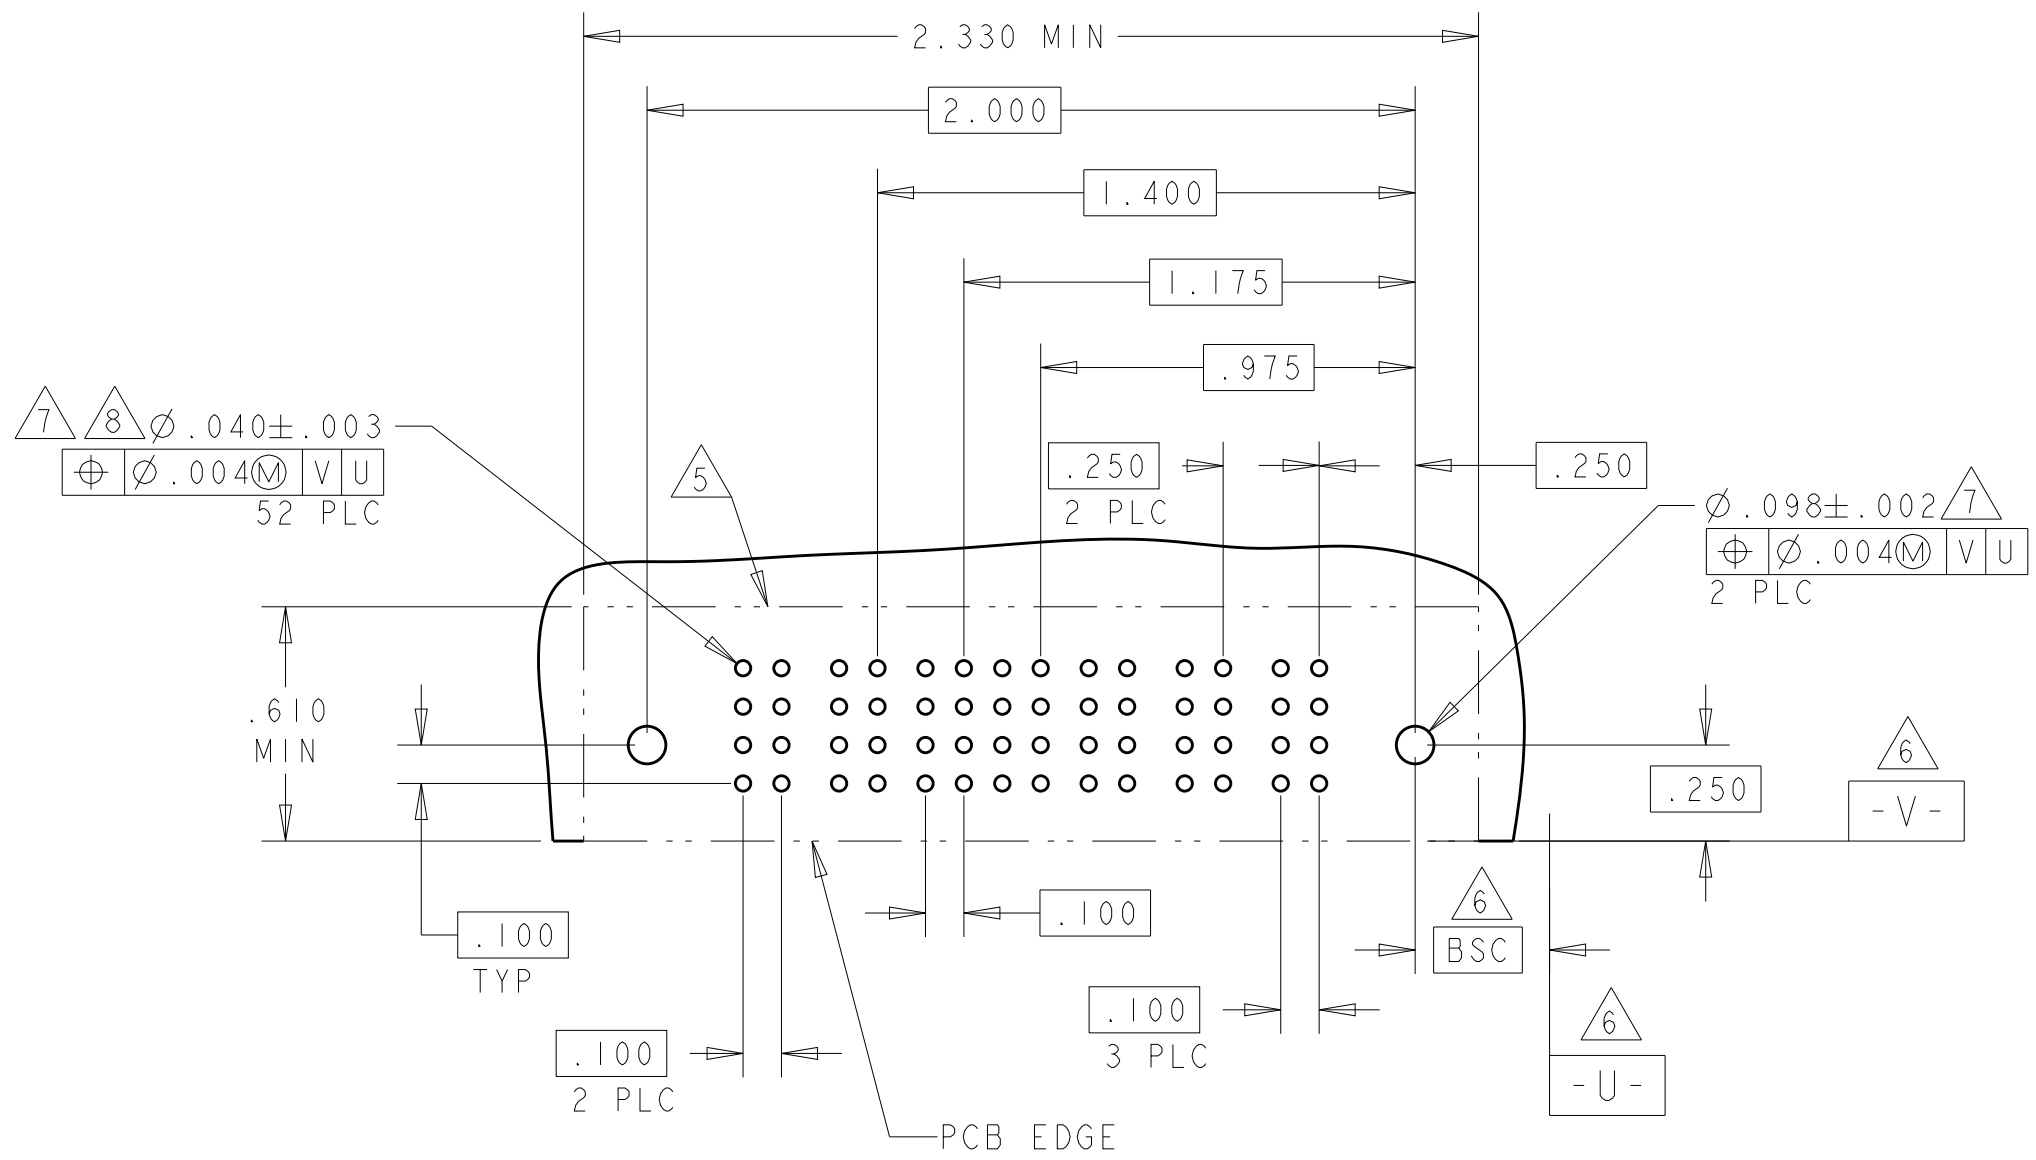

PART NUMBER	ROWS		POWER			SIGNAL							POWER		
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1	
2-6450170-7	D C B A														
3P + 24S + 3P															

PART NUMBER	ROWS		POWER			SIGNAL						POWER				
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1		
2-6450170-9	D C B A															
												</				

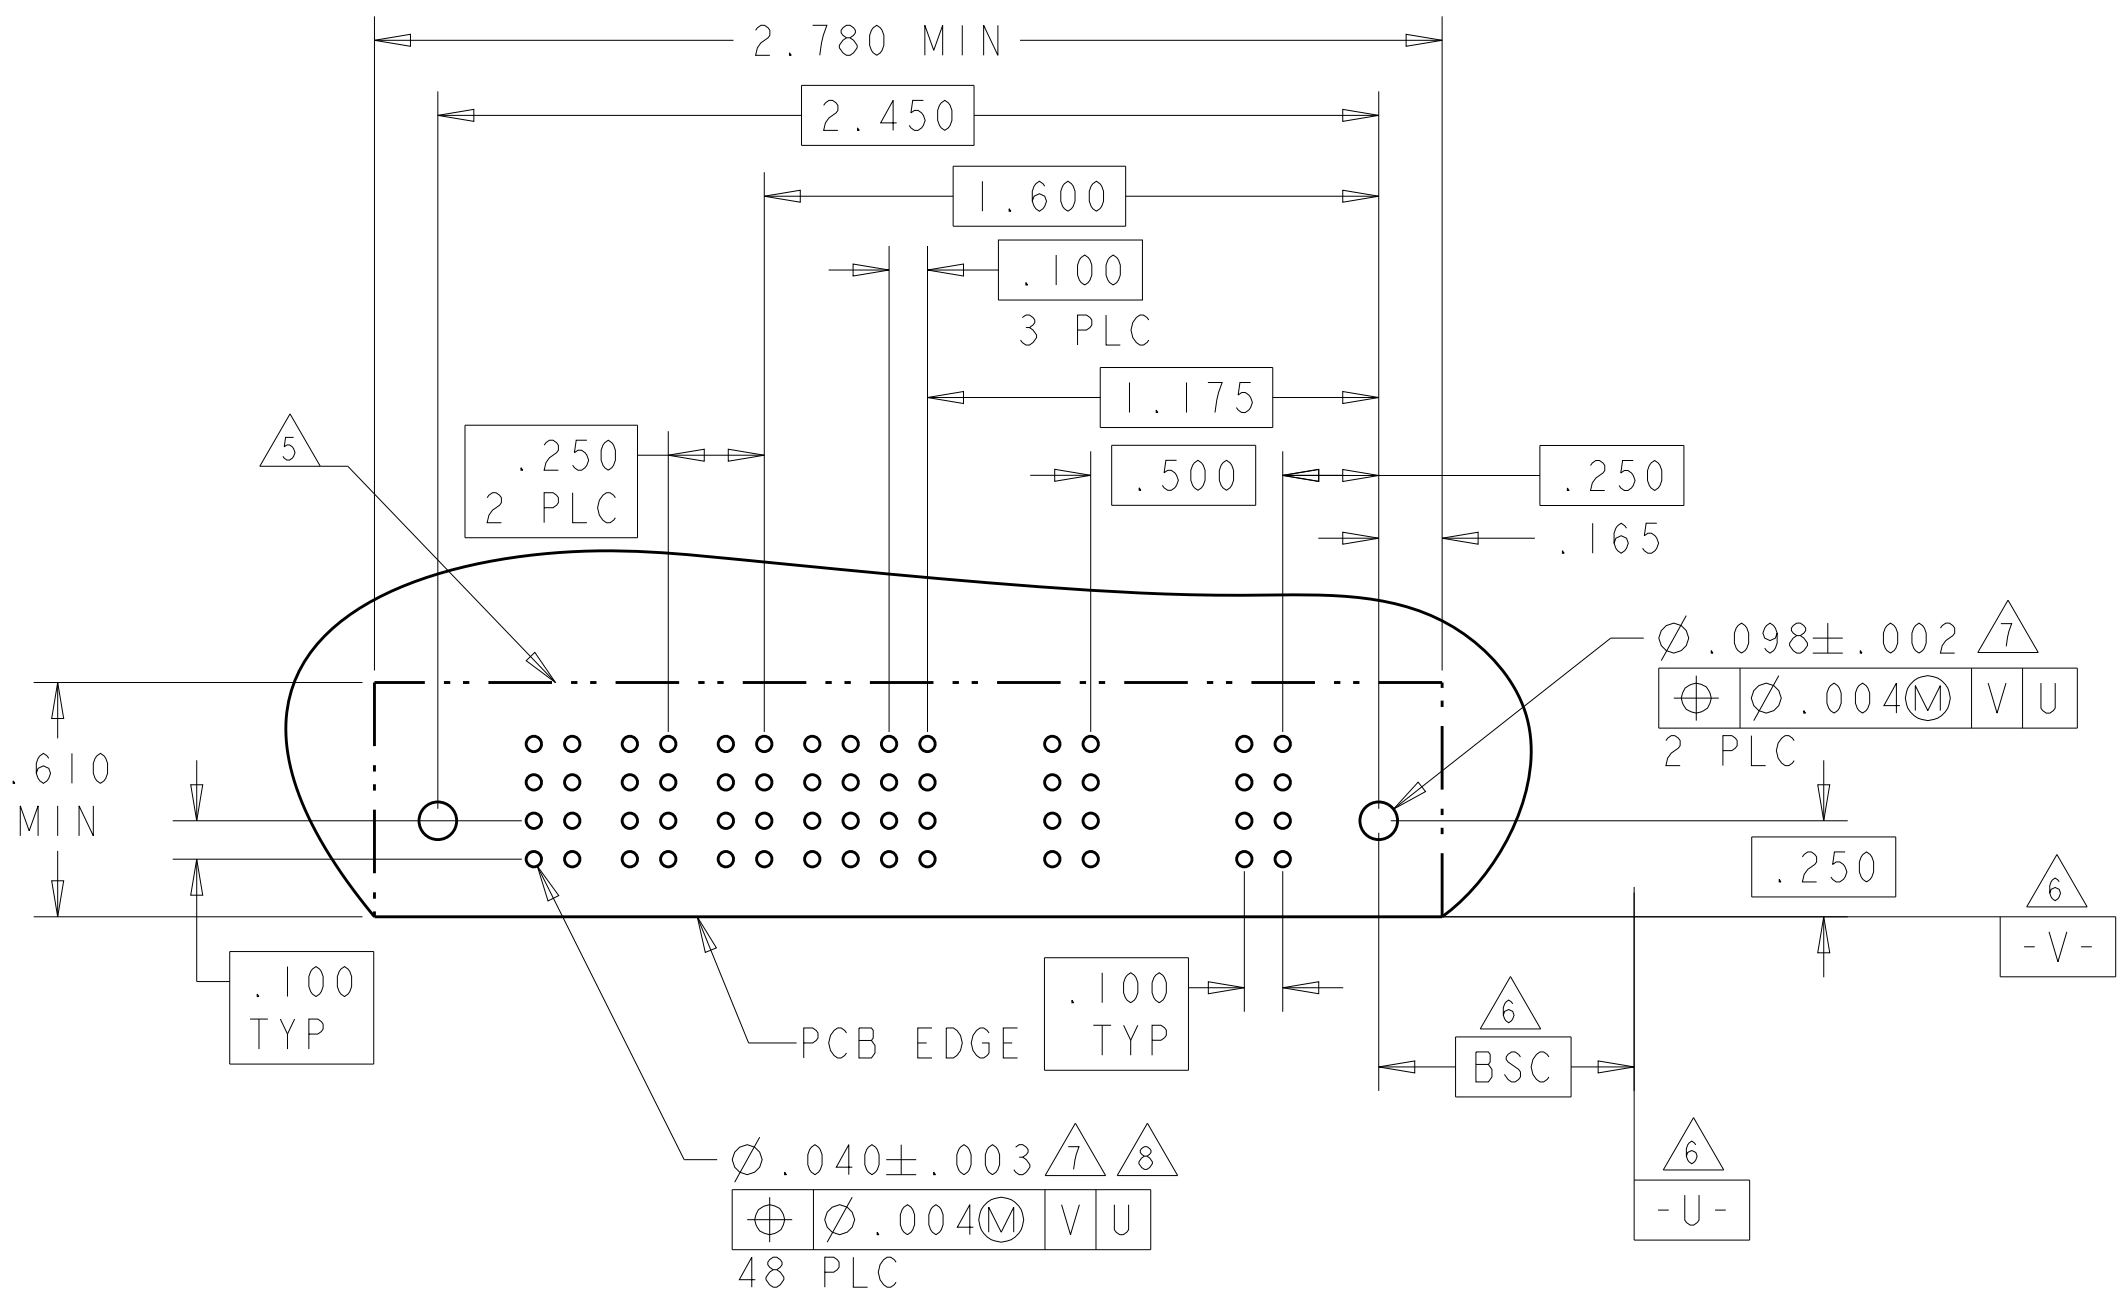


—NO CONTACTS LOADED



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWA R. GRZYBOWSKI		Z1FEBO5		 TE Connectivity	
		CHP M. PERCHERKE		Z1FEBO5			
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME		RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		0 PLC ±		PRODUCT SPEC		SIZE CASE CODE DRAWING NO A1 00779 C-6450170	
		2 PLC ±		108-1973			
		2 PLC ±		APPLICATION SPEC			
		4 PLC ±		114-13038			
ANGLES		±		WEIGHT		RESTRICTED TO	
FINISH		-		-		-	
MATERIAL		-		CUSTOMER DRAWING		SCALE 4:1 SHEET 5 OF 13 REV J5	


LOC		DIST		REVISONS			
ES	00	P	LTR	DESCRIPTION		DATE	OWN
				SEE SHEET 1		-	-

PART NUMBER	ROWS		POWER				SIGNAL				POWER		
			P6	P5	P4	P3	4	3	2	1	P2	P1	
1-6450170-9	D		RA	RA	RM	RM	H	H	H	H	RM	RA	
	C						G	G	G	G			
	B						F	F	F	F			
	A						E	E	E	E			
2P + 16S + 4P													

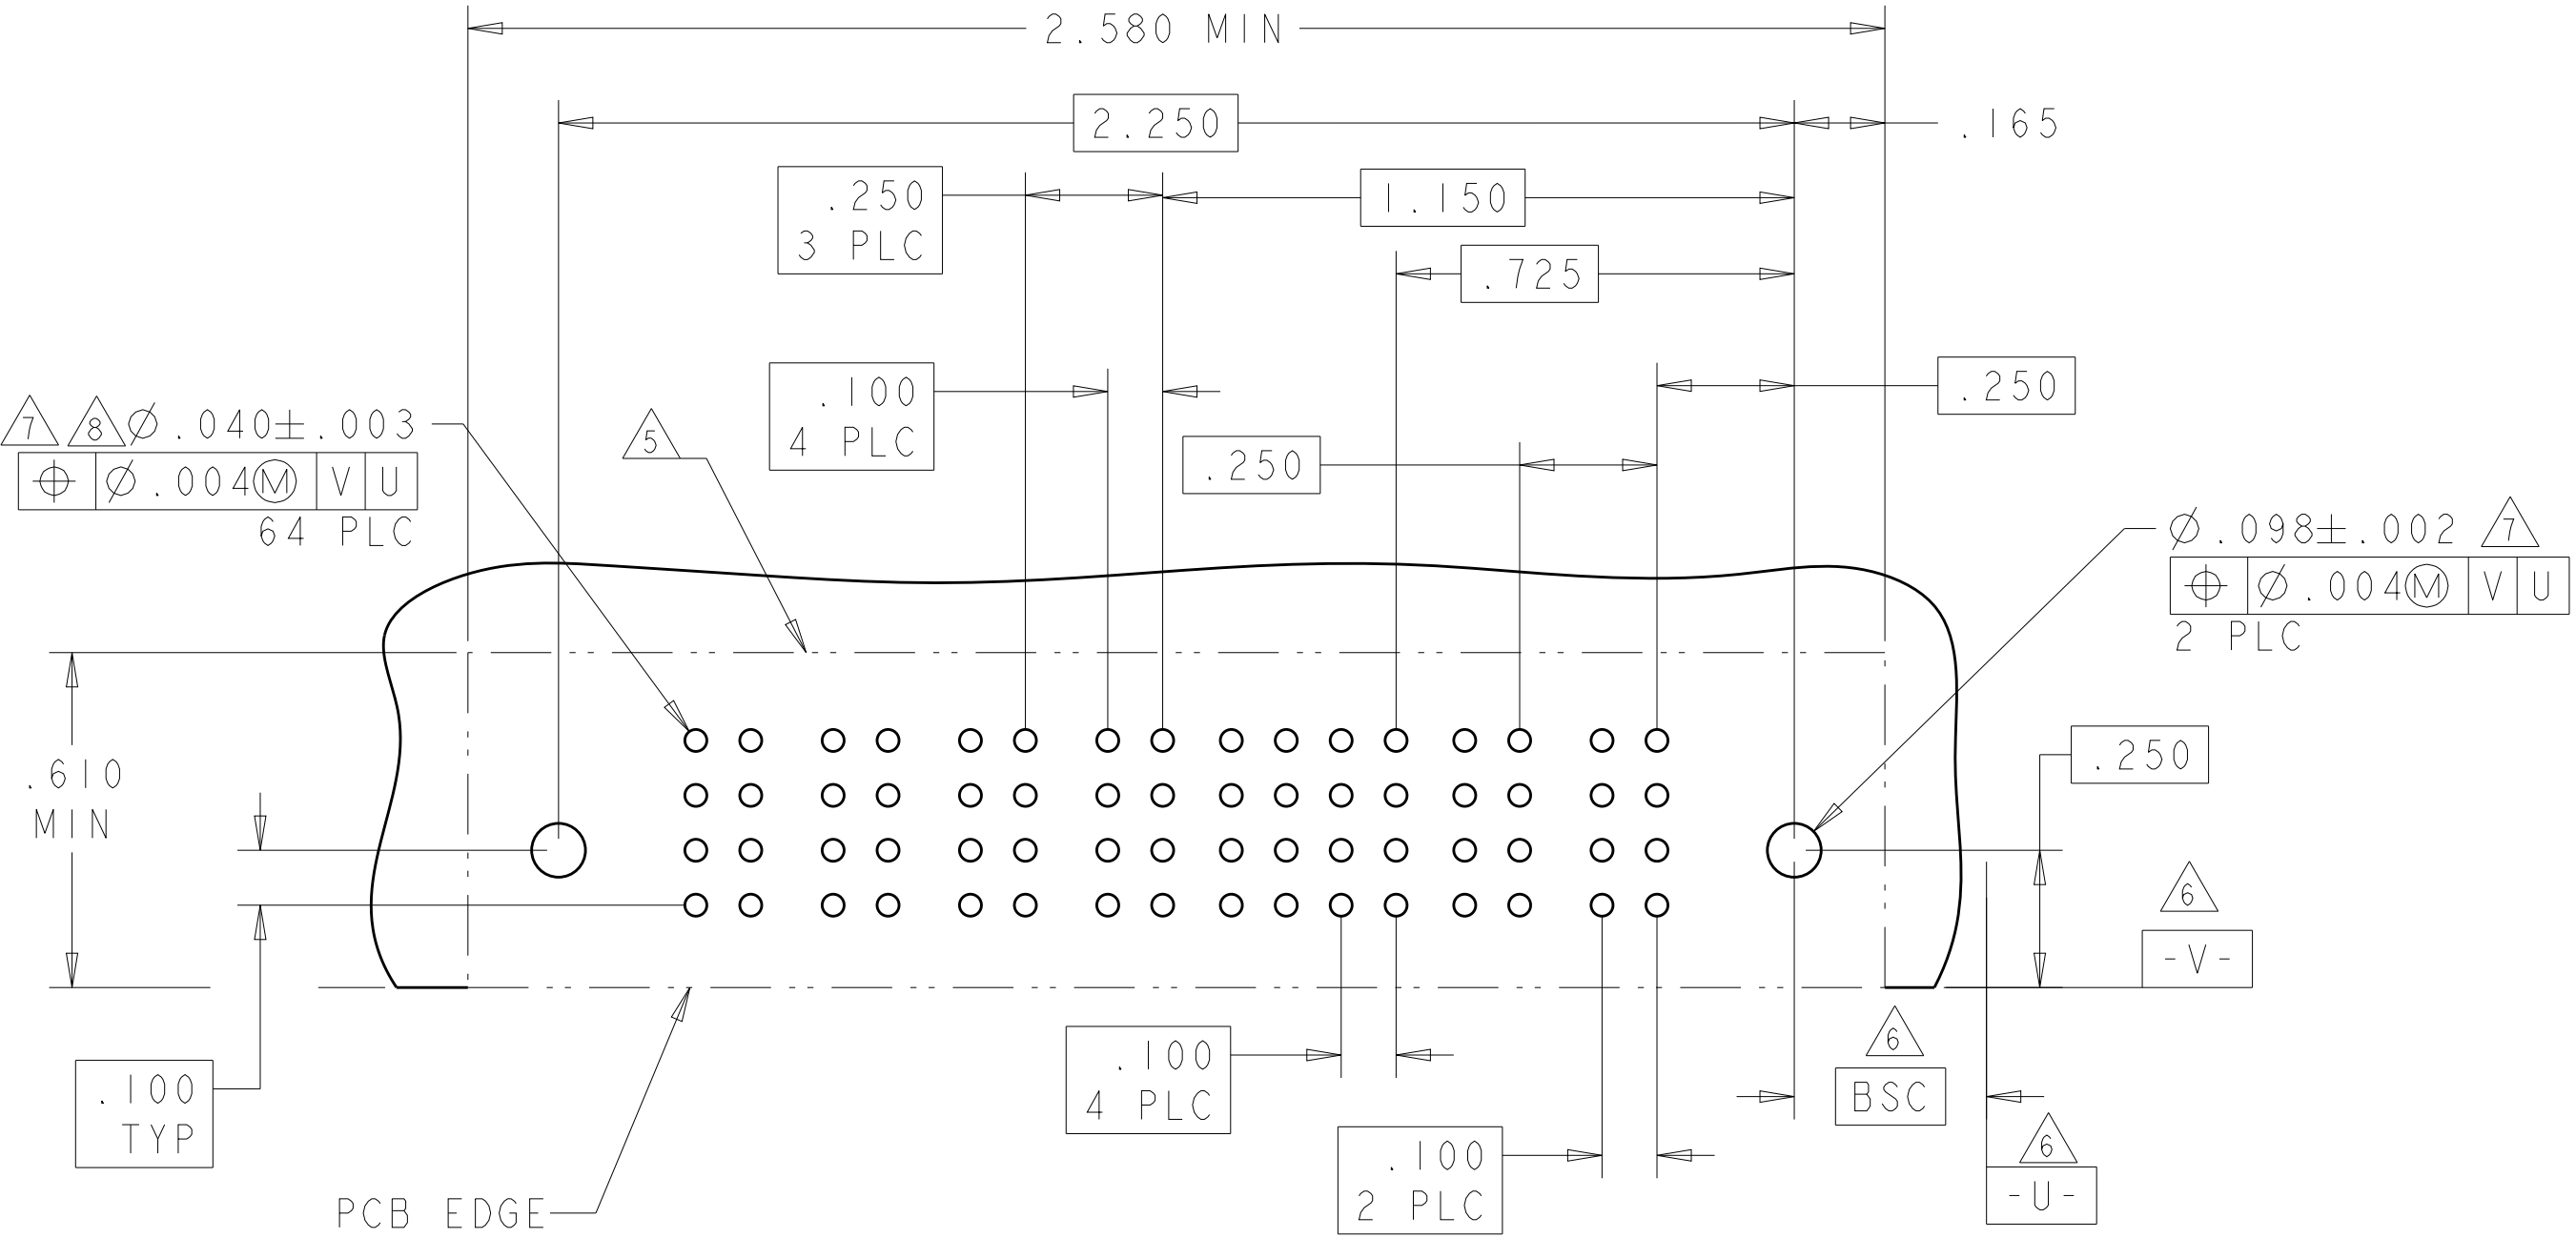

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
1-6450170-4	D C B A	HD	RA	RA	RA	RA	H	H	H	H	H	H	RA	RA	RA	RA	
							G	G	G	G	G	G					
							F	F	F	F	F	F					
							E	E	E	E	E	E					
4P + 24S + 4P																	

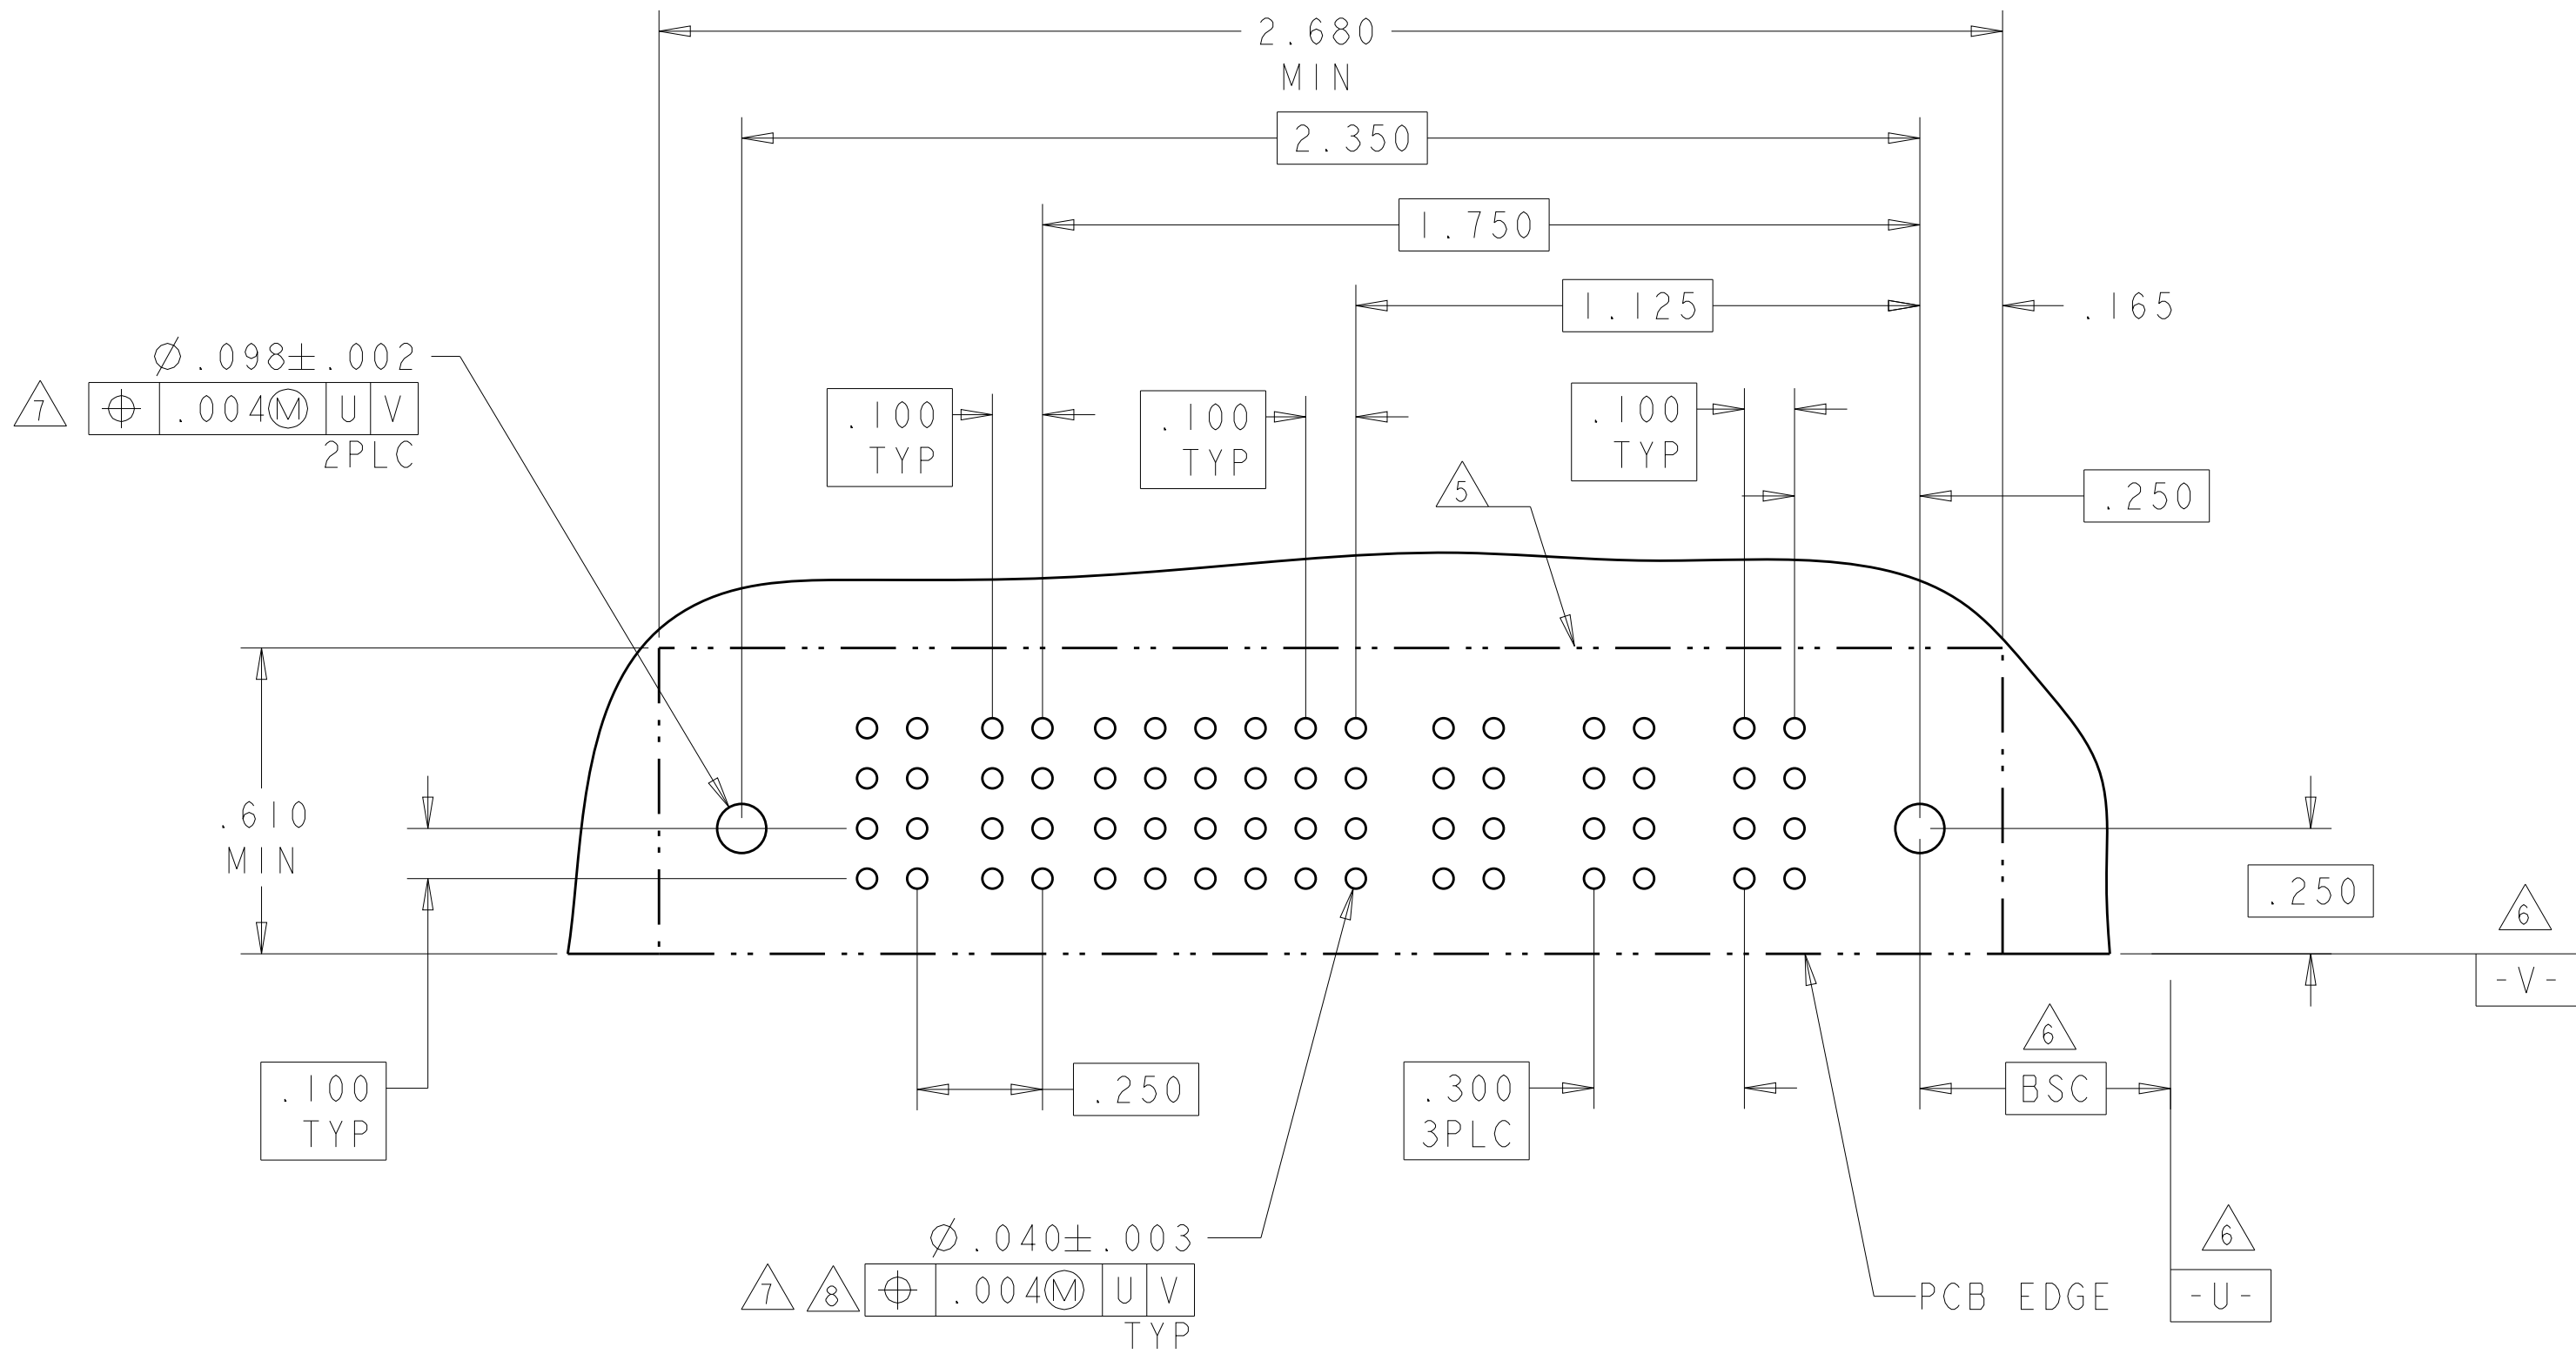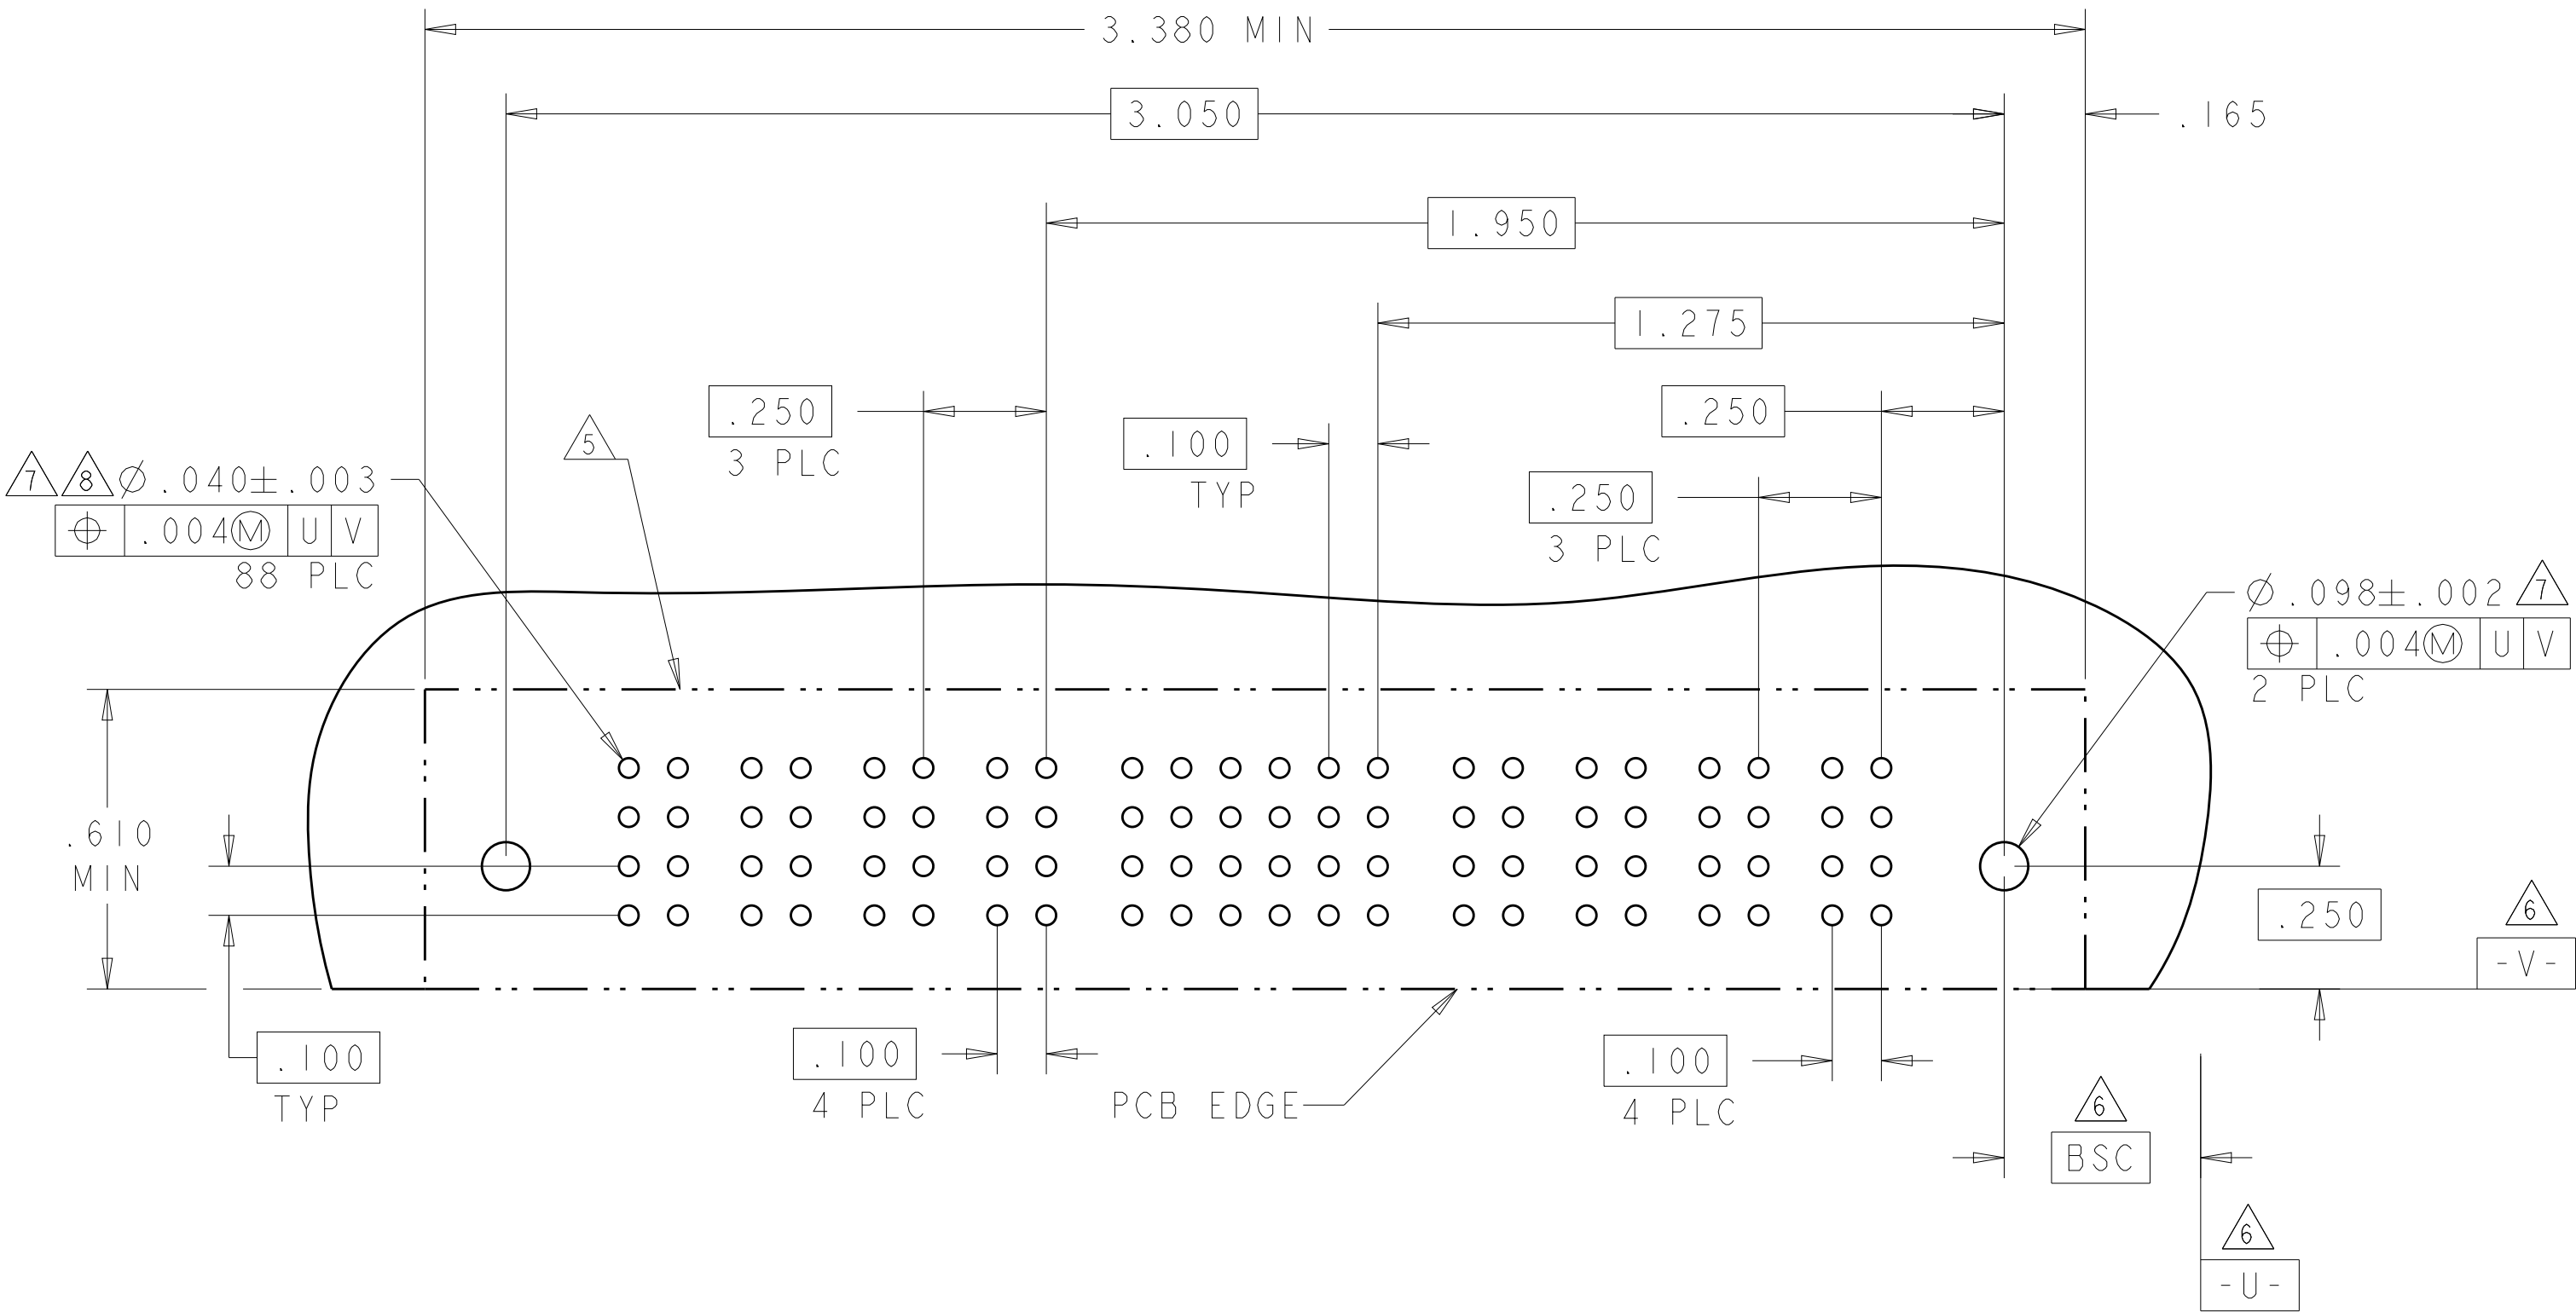

PART NUMBER	ROWS		POWER		SIGNAL						AC POWER			
			P5	P4	6	5	4	3	2	1	P3	P2	P1	
2-6450170-8	D		RA	RA	H	H	H	H	H	H	RA	RM	RM	
	G				G	G	G	G	G					
	F				F	F	F	F	F					
	E				E	E	E	E	E					
3ACP + 24S + 2P														

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN R. GRZYBOWSKI CHK M. PERCHERKE APVD M. PERCHERKE	21FEB05 21FEB05 -
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.002 ANGLES ±.2° FINISH	
MATERIAL		WEIGHT	
-		-	
CUSTOMER DRAWING		SCALE 4:1	
SHEET 6 OF 13		REV J5	

TE Connectivity


RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE CAGE CODE DRAWING NO. RESTRICTED TO


A100779C=6450170 -

LOC	DIST	REVISIONS			
ES	00	P	LTR	DESCRIPTION	DATE
		-		SEE SHEET 1	-

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			P2	4	3	2	1	P1	
2-6450170-0	D C B A		RM	H	H	H	H	RM	
				G	G	G	G		
				F	F	F	F		
				E	E	E	E		
IP + 16S + IP									

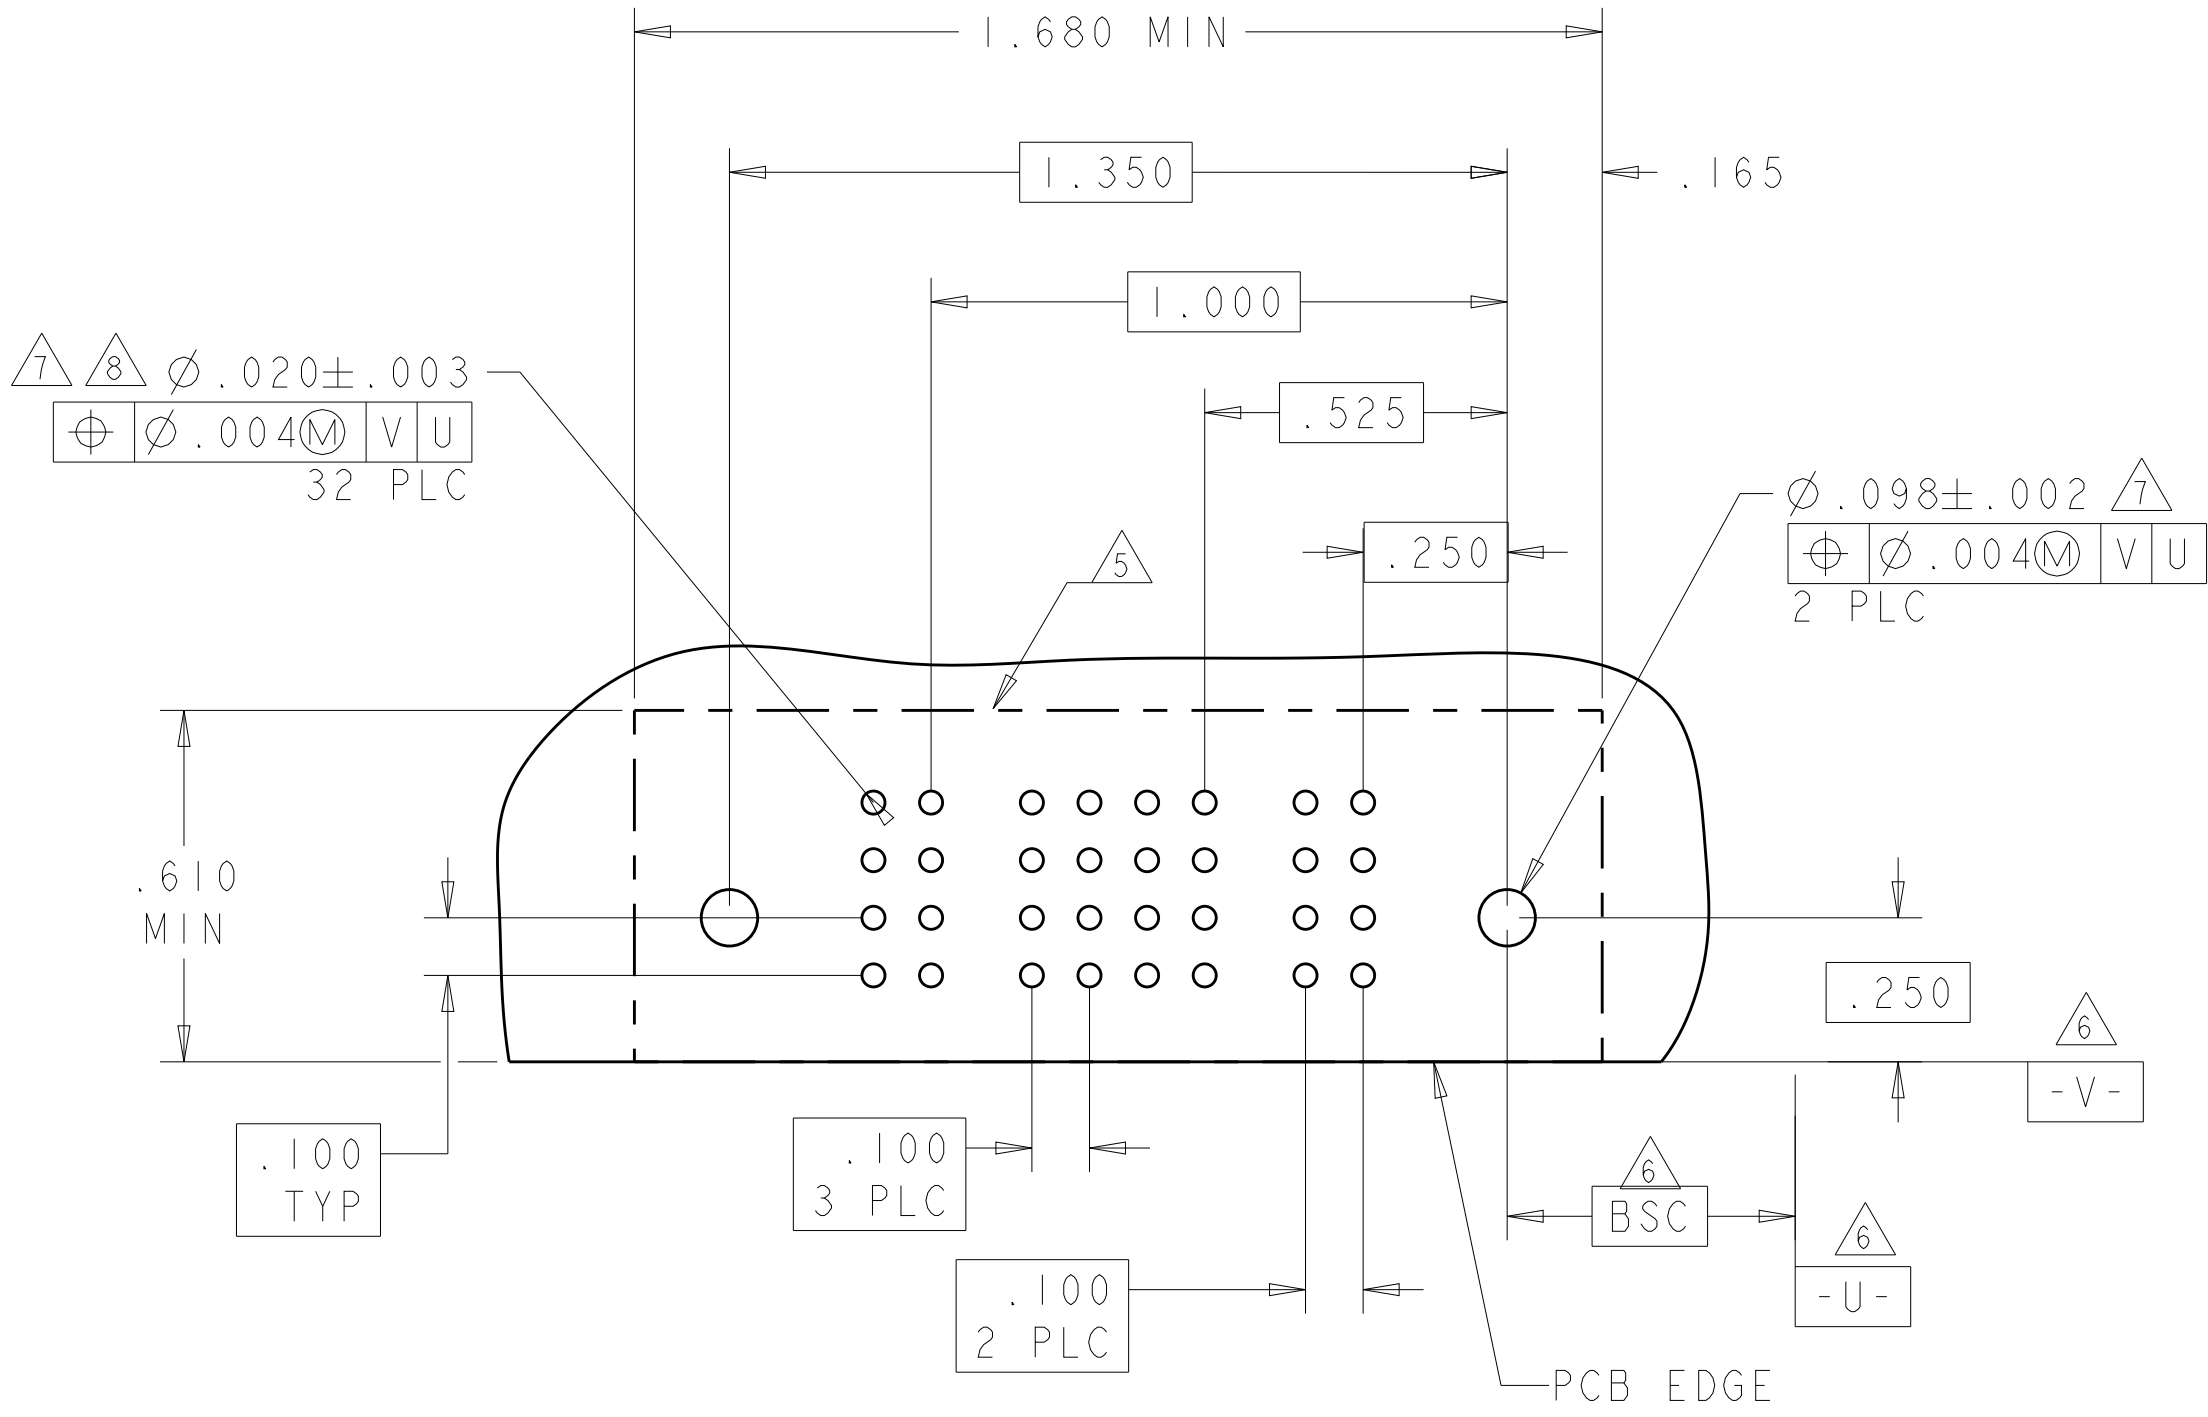

PART NUMBER	ROWS		POWER		SIGNAL							AC POWER			
			P5	P4	6	5	4	3	2	1	P3	P2	P1		
3-6450170-0	D C B A				H	H	H	H	H	H					
					G	G	G	G	G	G					
					F	F	F	F	F	F					
					E	E	E	E	E	E					
3ACP + 24S + 2P															

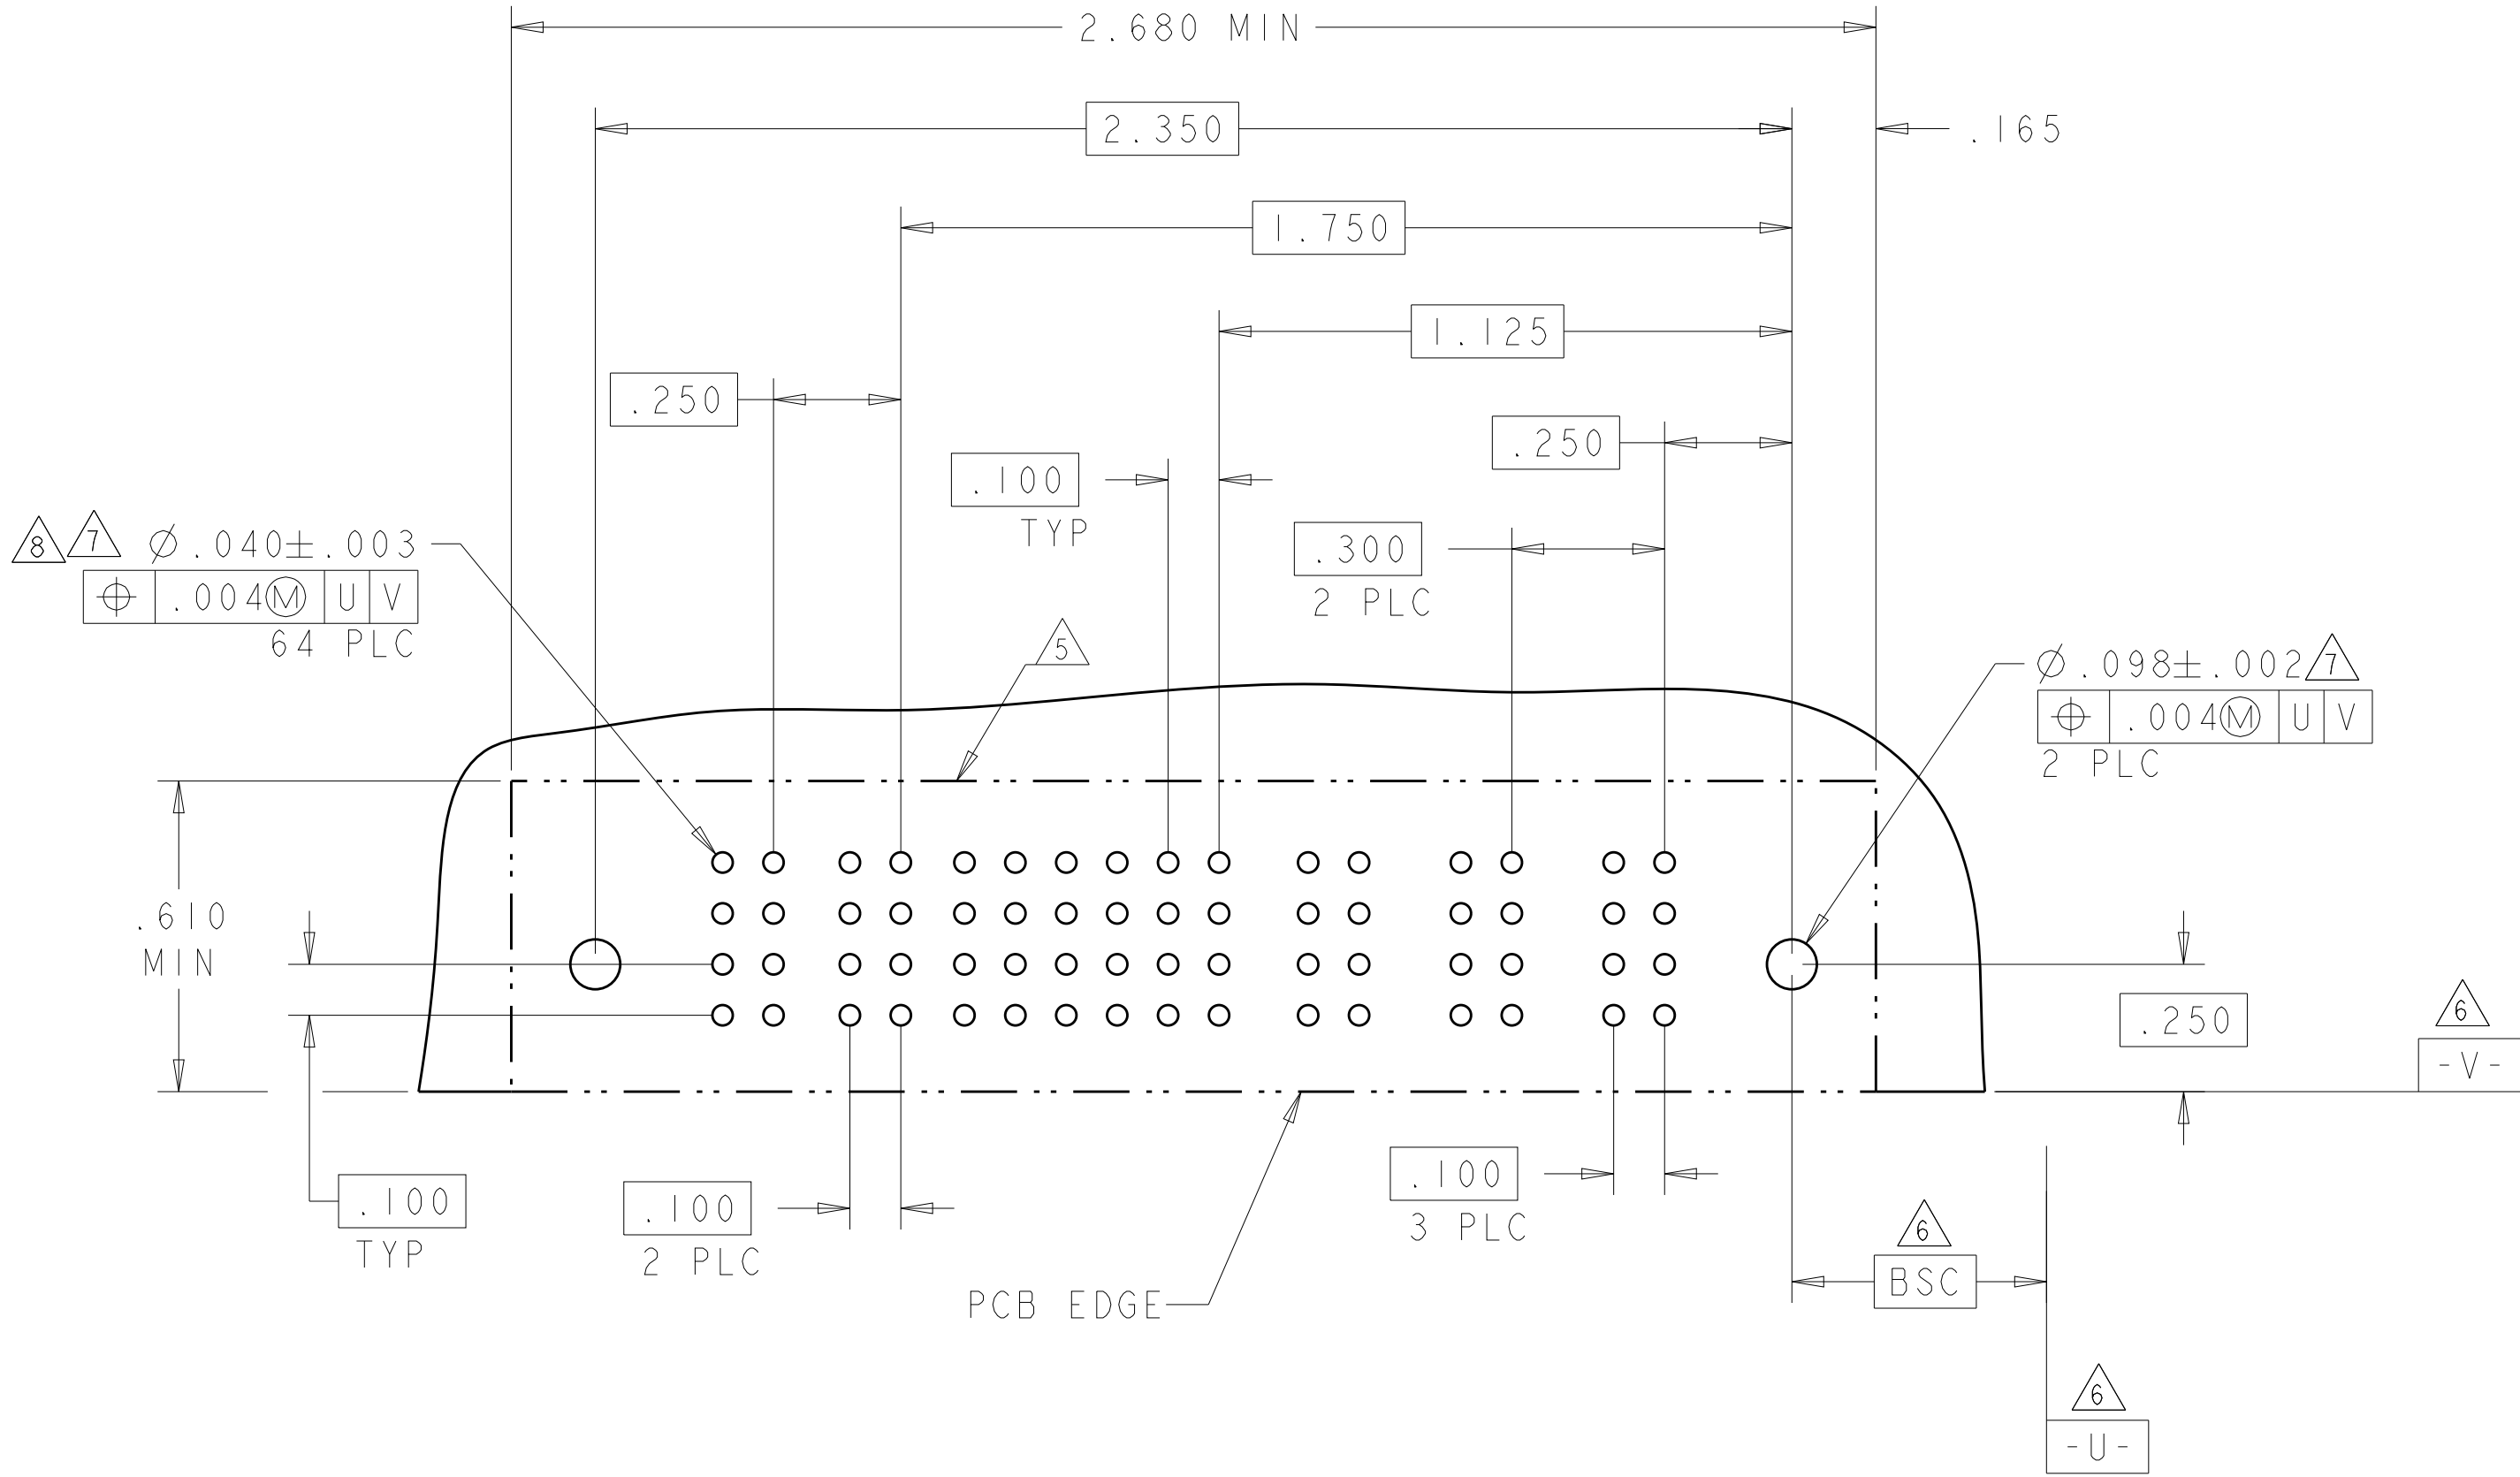

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

R.GRZYBOWSKI

21FEB05

CHK

M.PERCHERKE

21FEB05

APVD

M.PERCHERKE

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

MATERIAL

-

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE

CAGE CODE

DRAWING NO

A100779

©=6450170

RESTRICTED TO

-

SCALE

4:1

SHEET

7

OF


13

REV

J5


TE Connectivity

PART NUMBER	ROWS		POWER			SIGNAL						POWER				
			P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
I-6450170-8	D C B A					H	H	H	H	H	H					
						G	G	G	G	G	G					
						F	F	F	F	F	F					
						E	E	E	E	E	E					
4P + 24S + 3ACP																

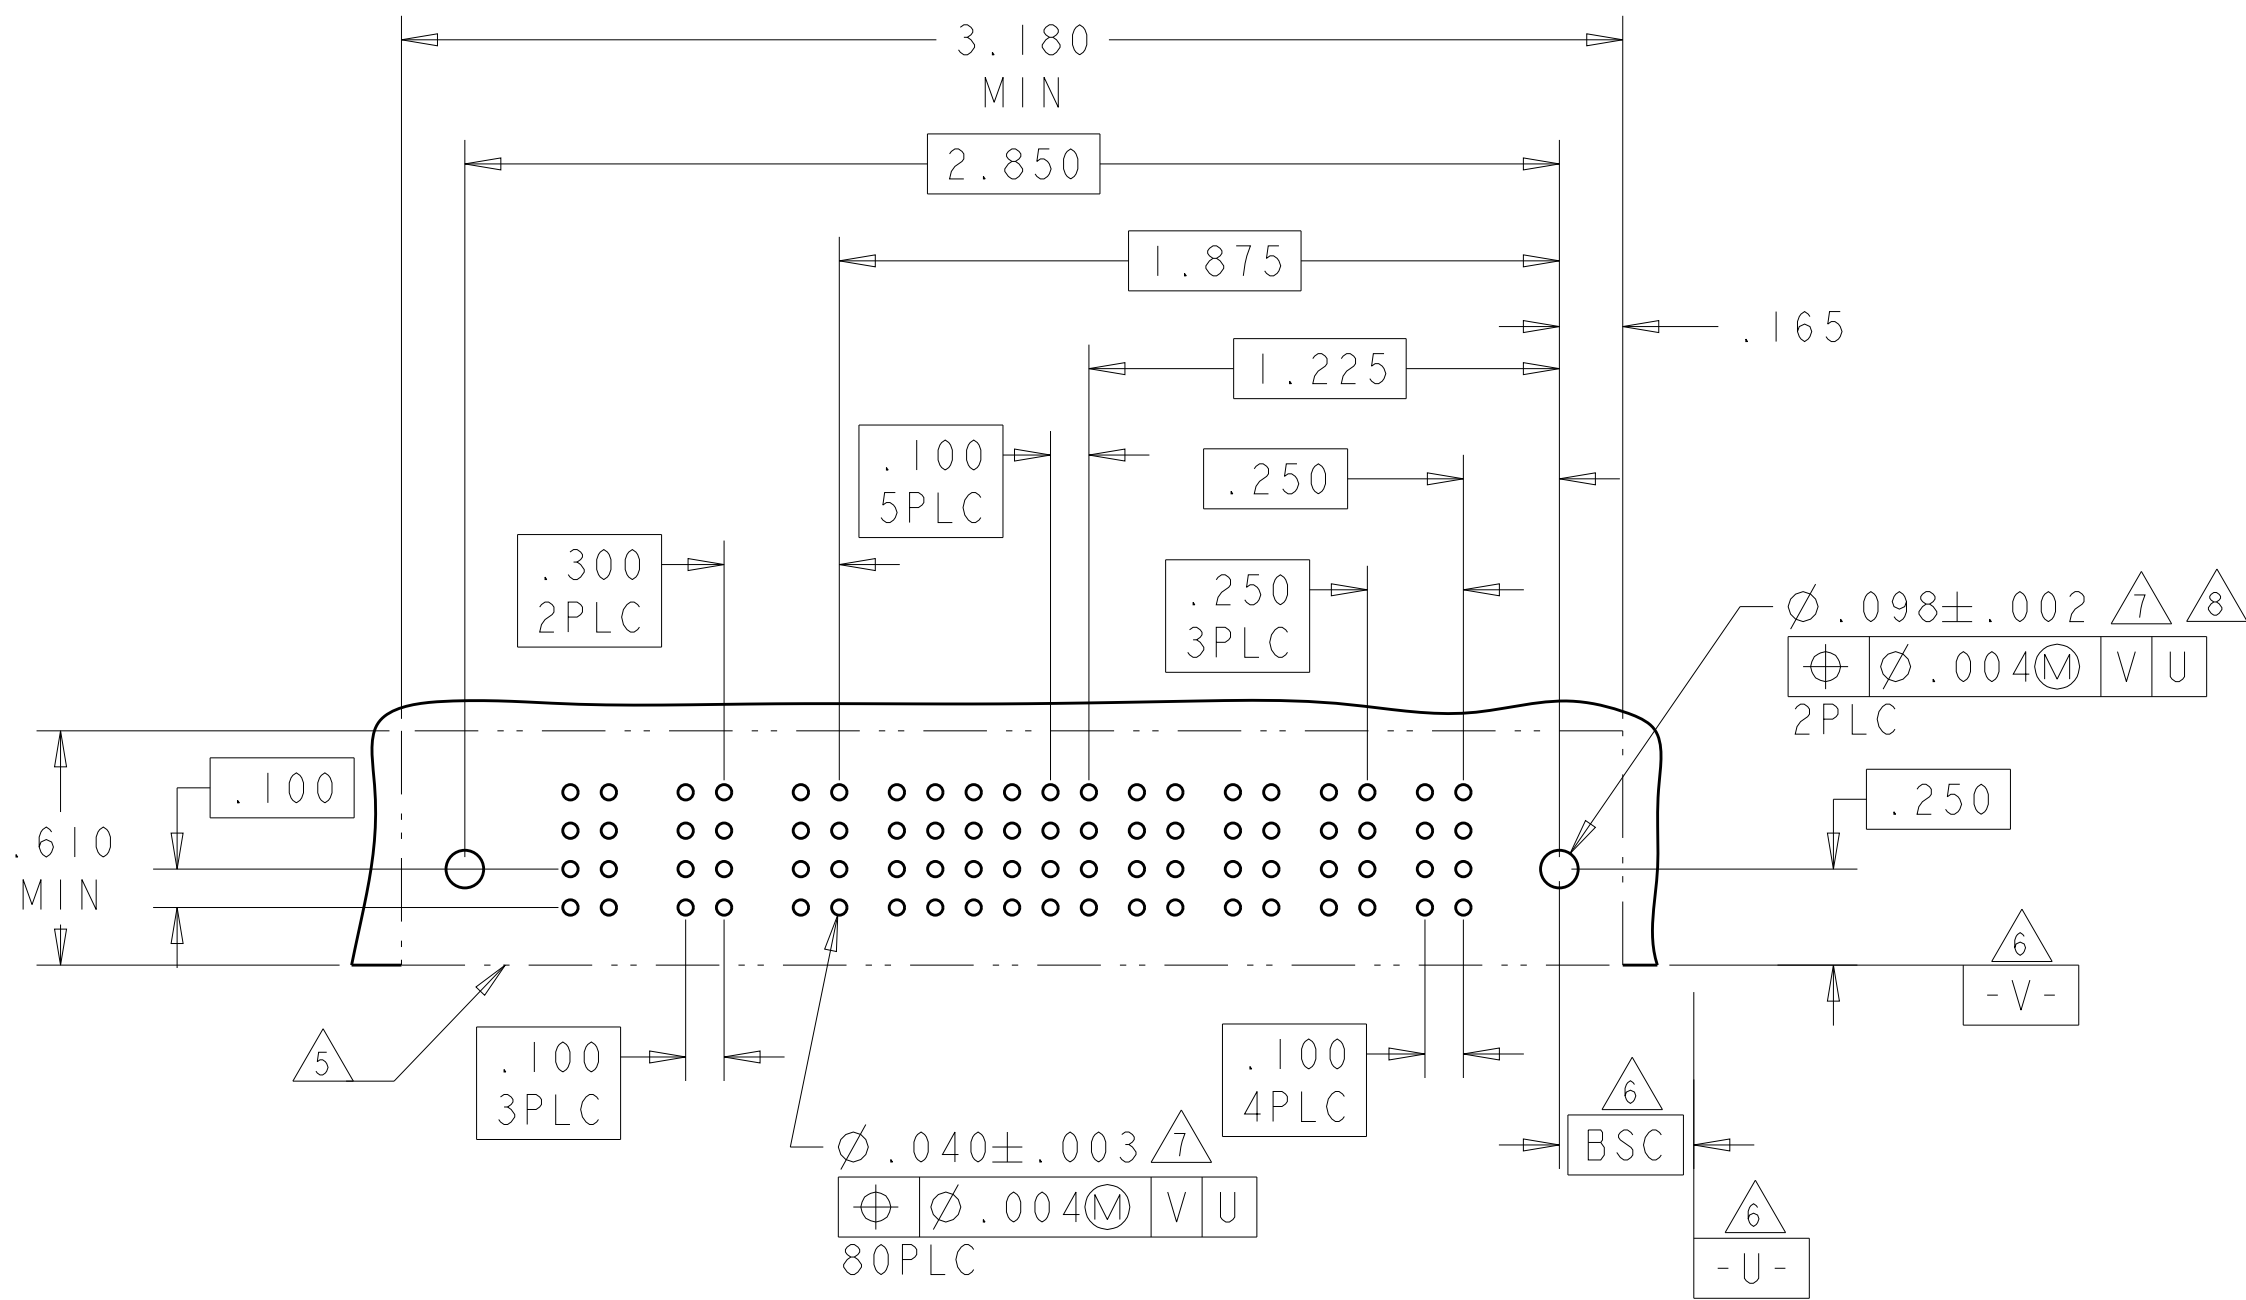4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL			POWER				
			P6	P5	3	2	1	P4	P3	P2	P1	
3-6450170-3	D											
	C											
	B											
	A											
	HD											
4ACP + 12S + 2P												

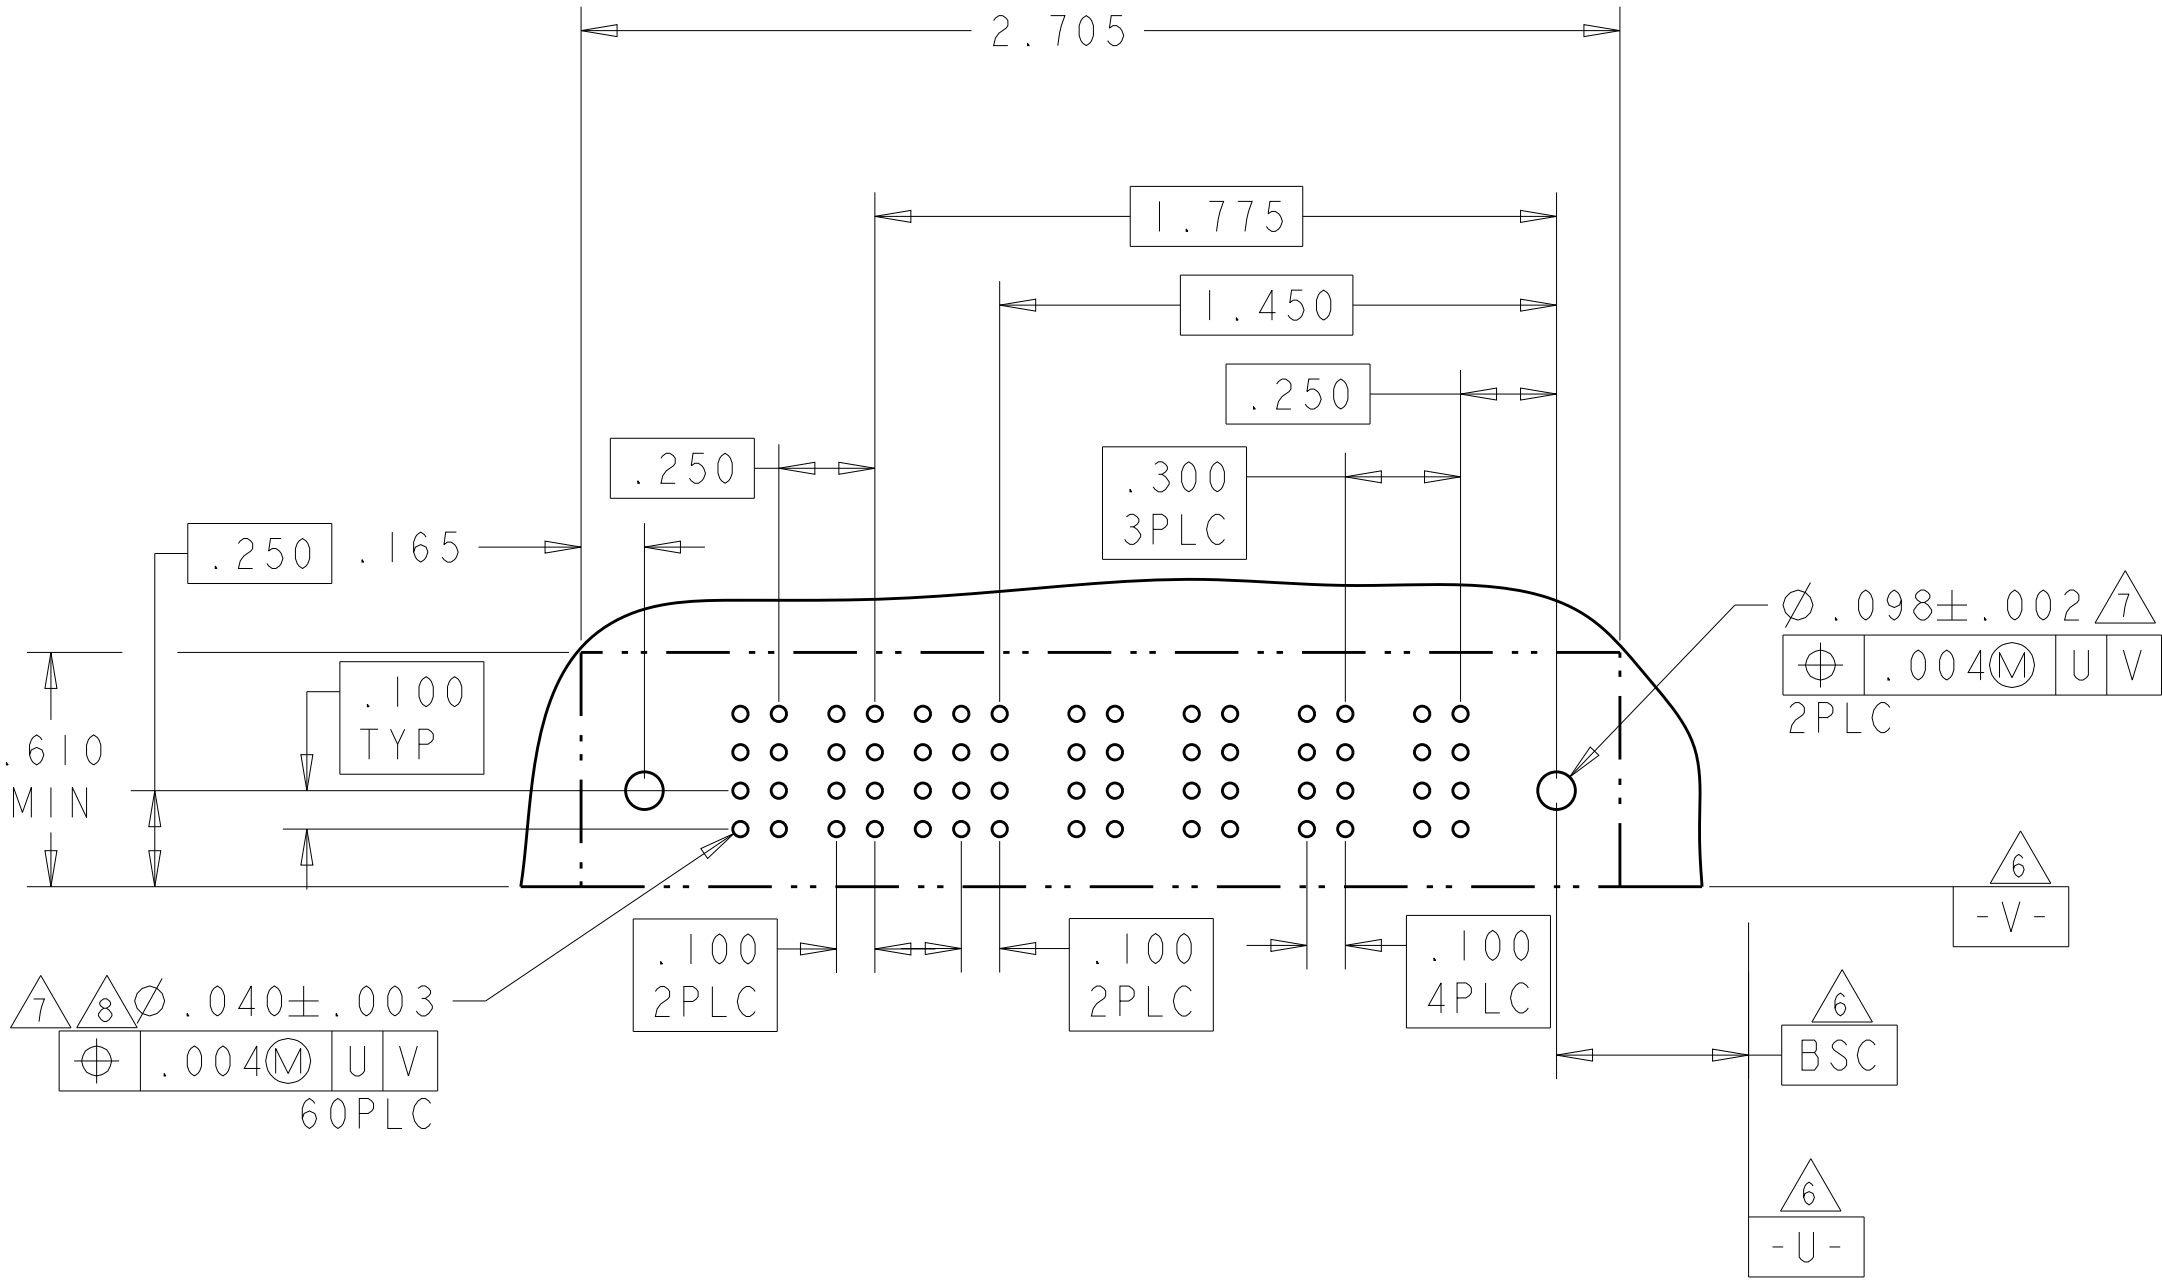

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

R.GRZYBOWSKI

21FEB05

CHK

M.PERCHERKE

21FEB05

APVD

M.PERCHERKE

-

TE Connectivity

RIGHT ANGLE RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

DIMENSIONS:

INCHES

0 PLC

±"

1 PLC

±.01

2 PLC

±.01

3 PLC

±.005

4 PLC

±.0020

ANGLES

±2°

FINISH

-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

CUSTOMER DRAWING

NAME

A100779

C=6450170

SCALE

4:1

SHEET

9

OF

13

REV

J5


SIZE

CAGE CODE


DRAWING NO

RESTRICTED TO


PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P4	P3	2	1	P2	P1	
3-6450170-5	D C B A								
									
2P + 8S + 2P									

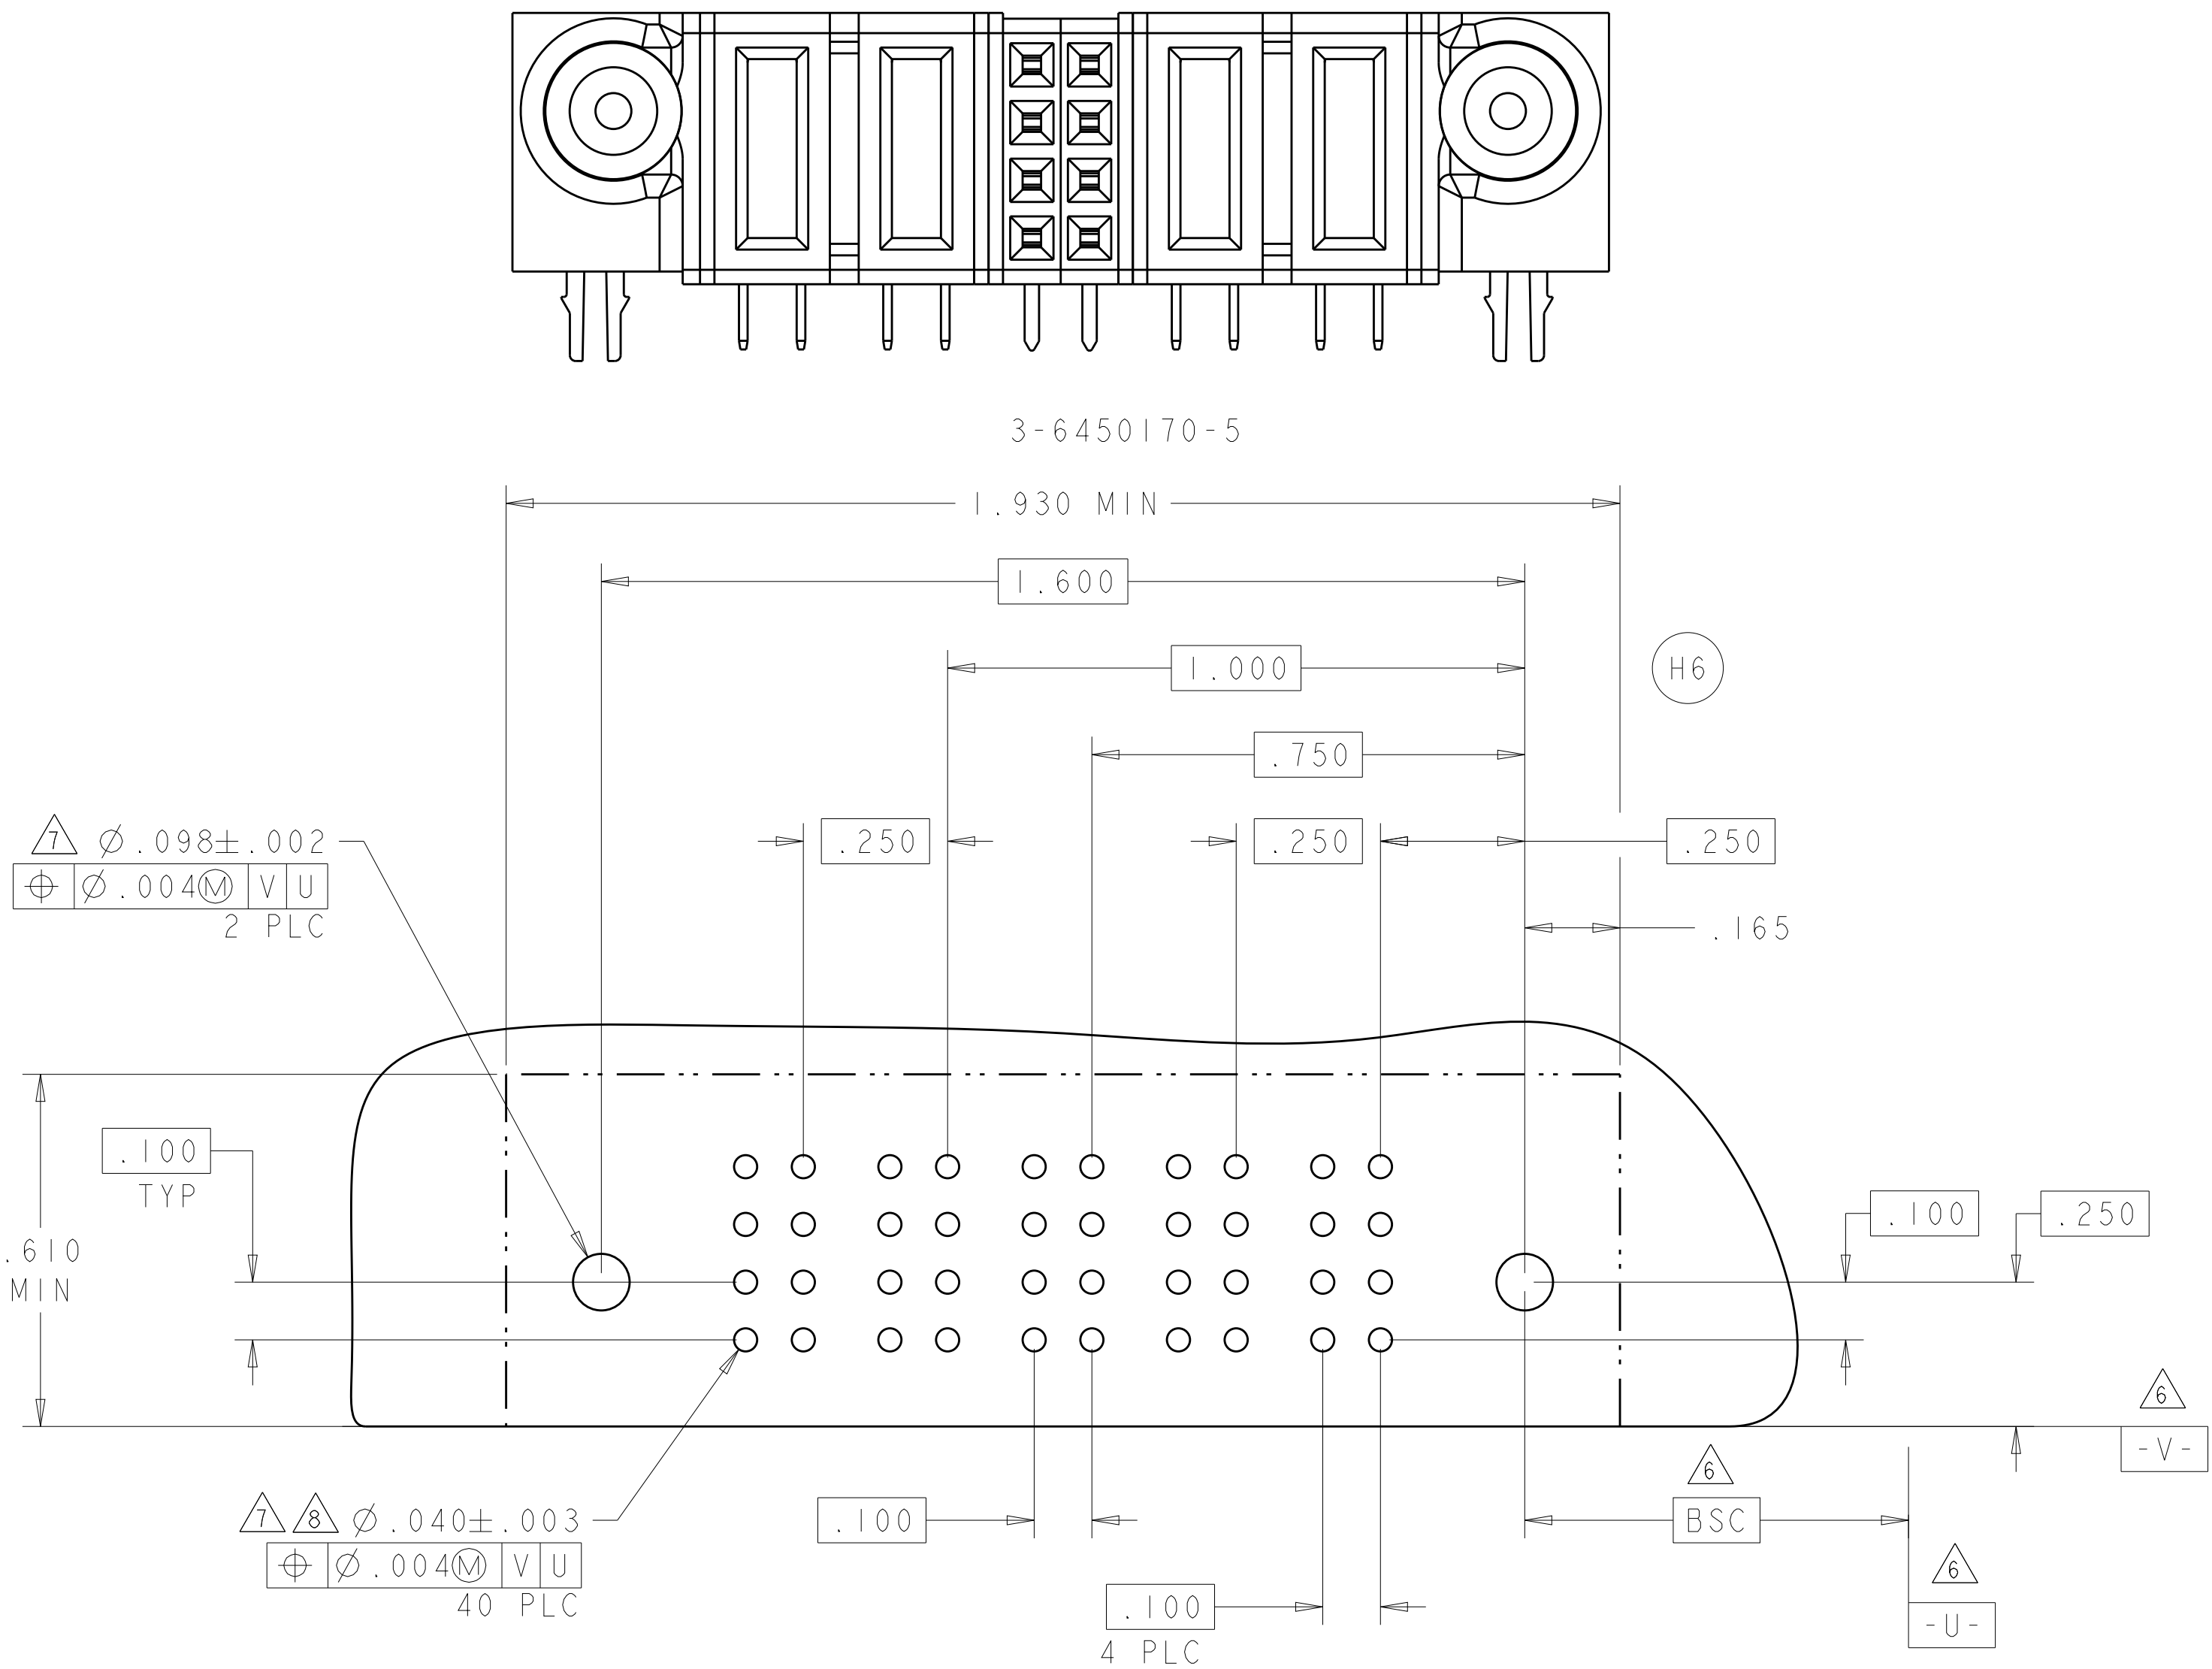4805 (3/11)

PART NUMBER	ROWS		POWER	SIGNAL								POWER	
			P2	8	7	6	5	4	3	2	1	P1	
3-6450170-7	D C B A		 RM	H	H	H	H	H	H	H	H	 RM	
				G	G	G	G	G	G	G	G		
				F	F	F	F	F	F	F	F		
				E	E	E	E	E	E	E	E		
IP + 32S + IP													

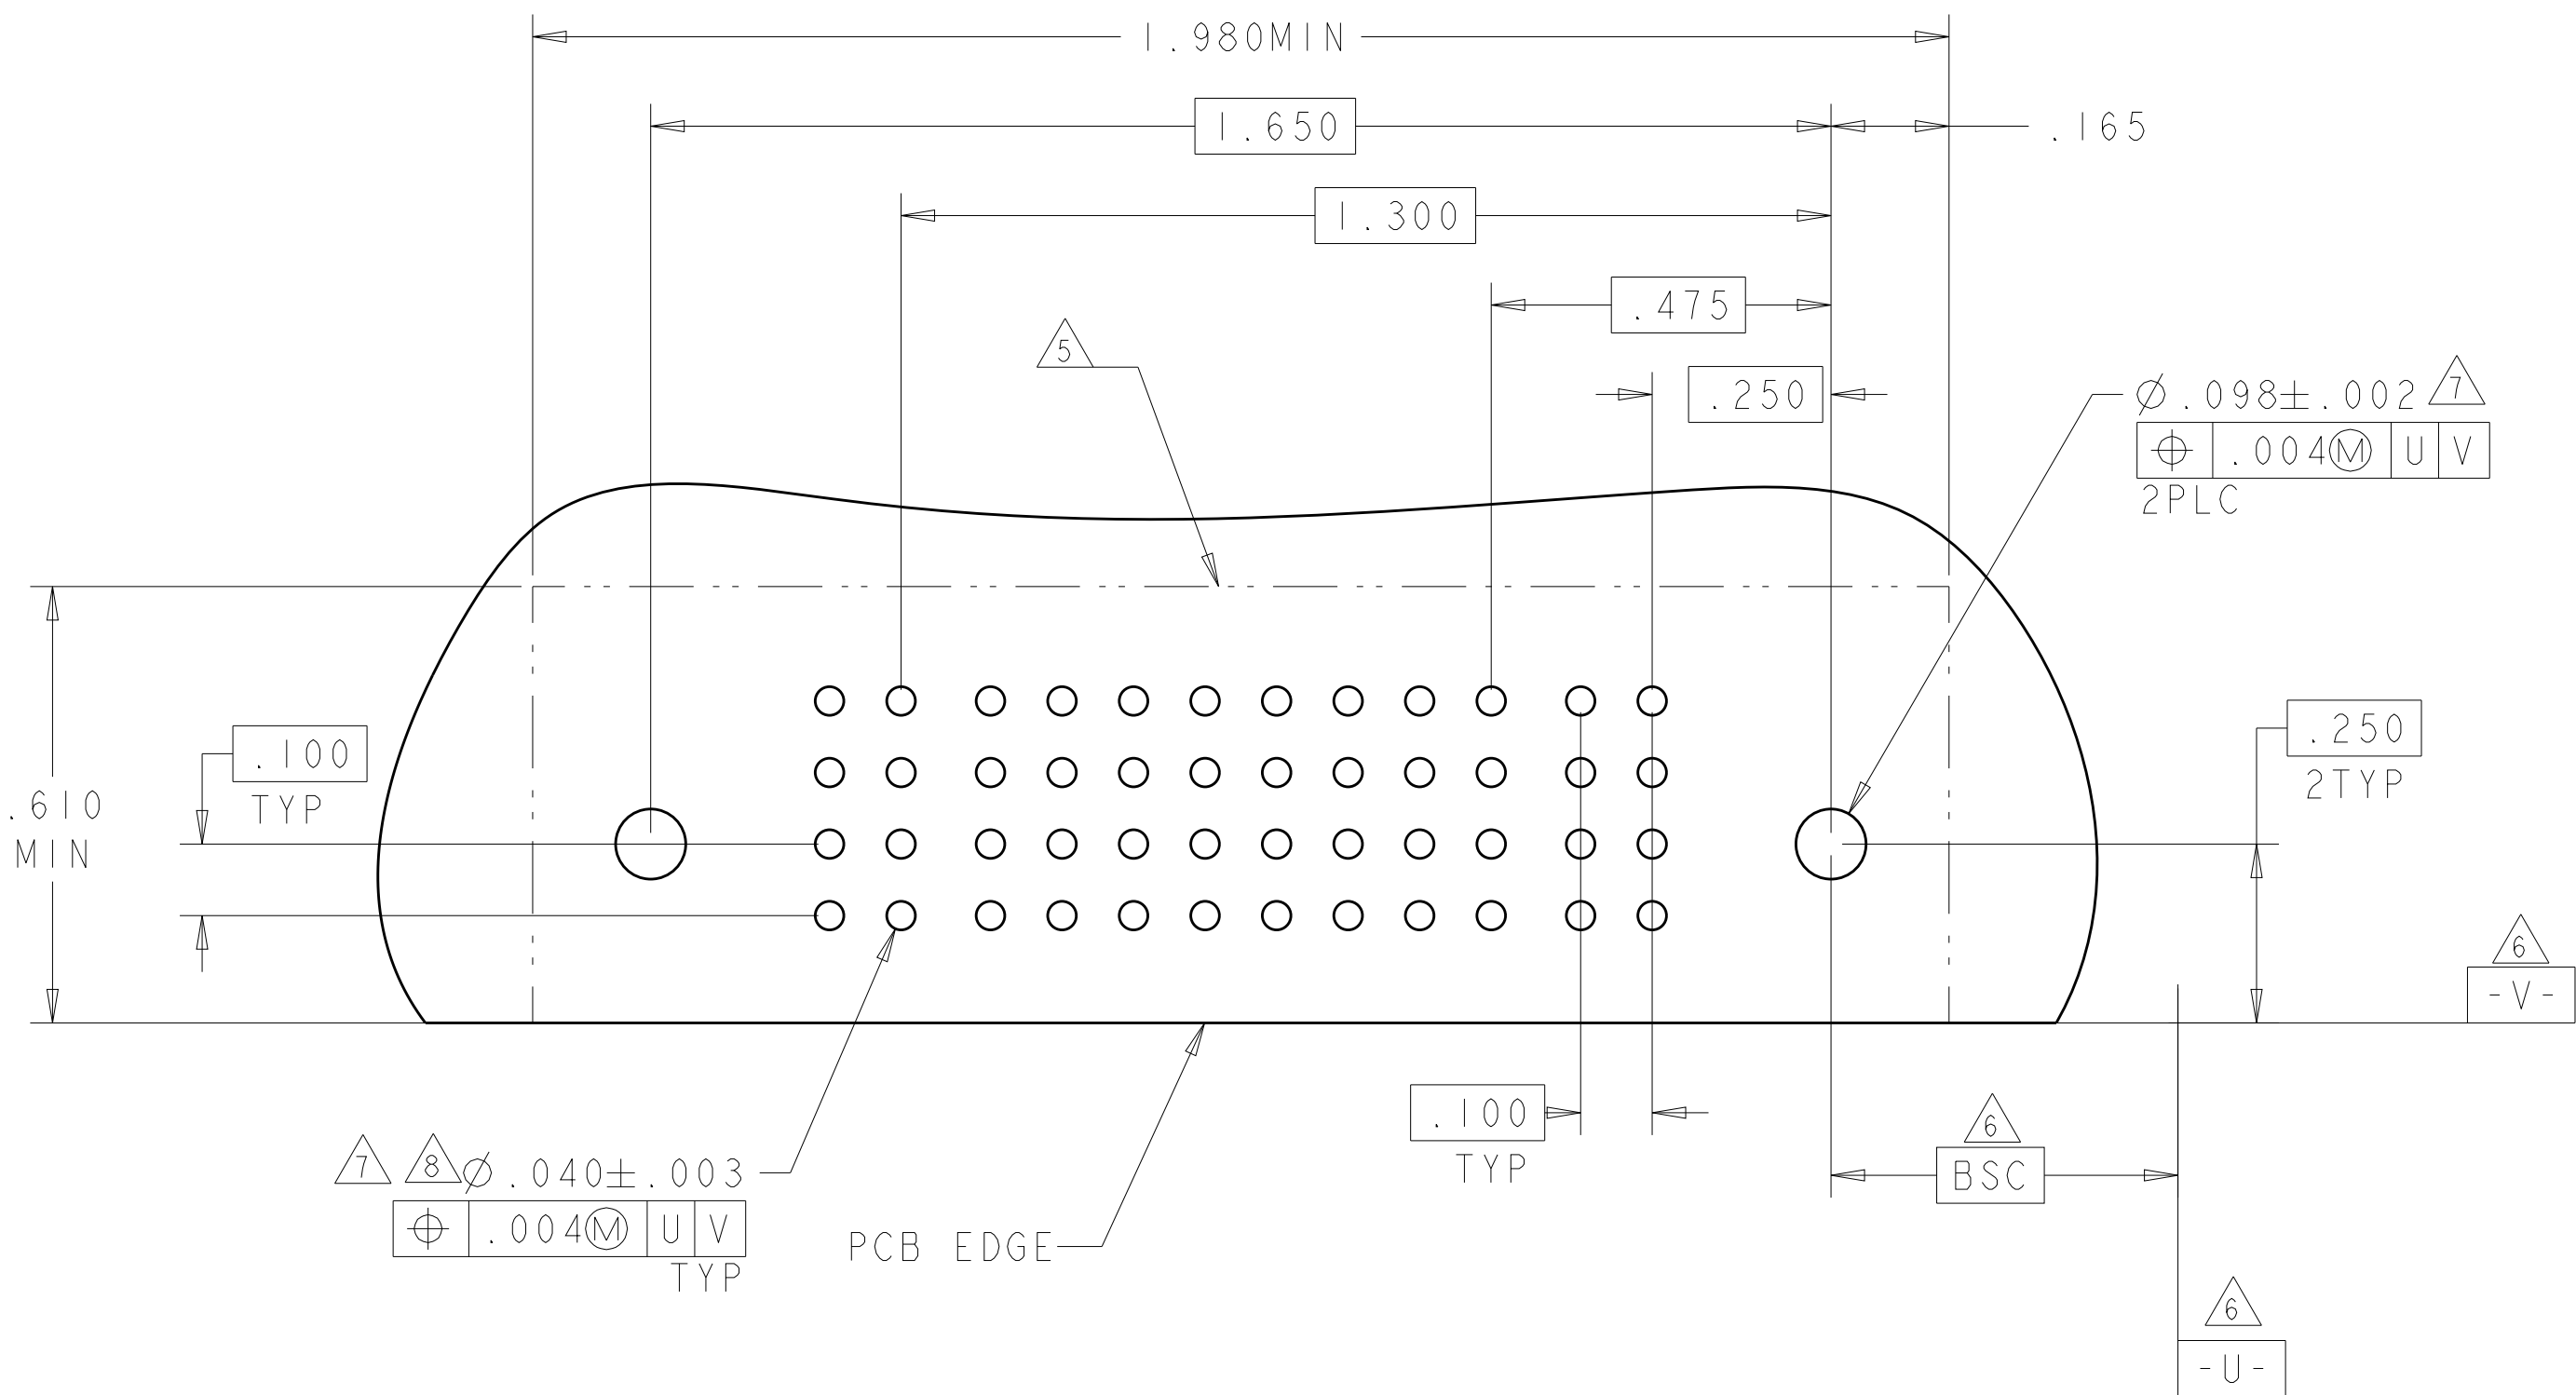4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL		POWER			
			P5	P4	2	1	P3	P2	P1	
3-6450170-9	D C B A				H	H				
					G	G				
					F	F				
					E	E				
3ACP + 8S + 2P										

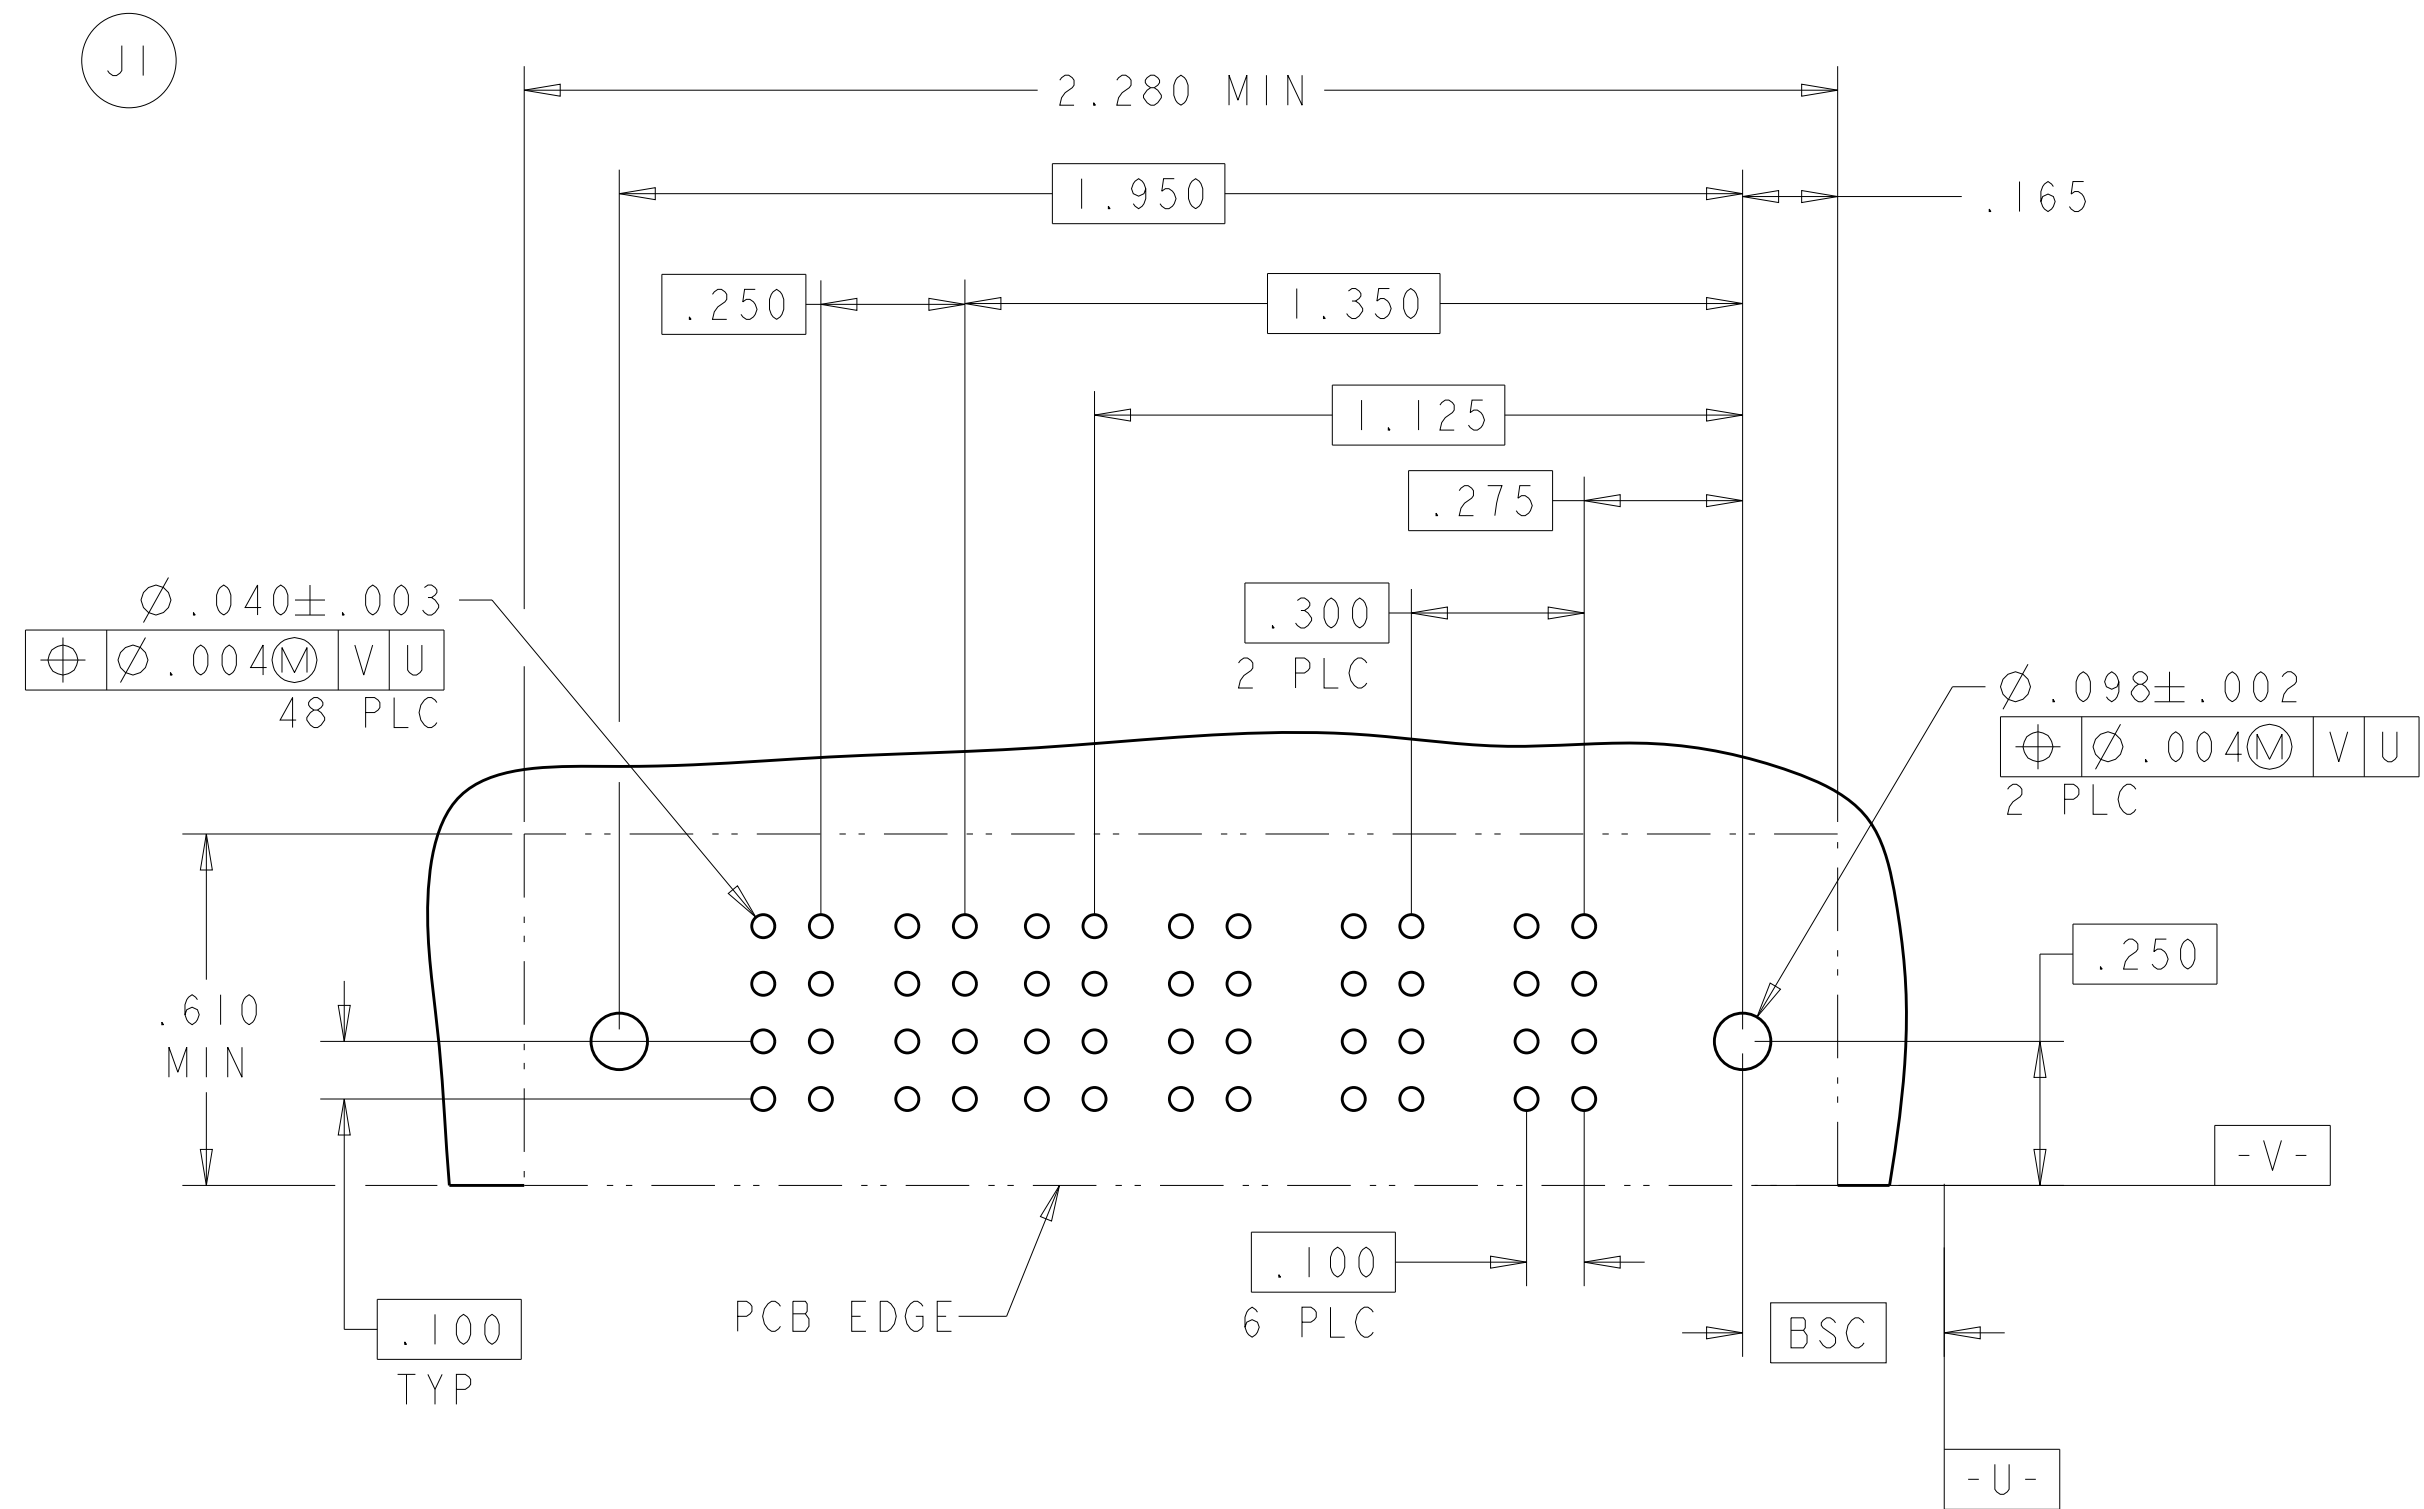

TE RECOMMENDED PCB LAYOUT



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL			POWER						
			P10	P9	P8	P7	3	2	1	P6	P5	P4	P3	P2	P1	
4-6450170-0	D		RM	RM	RM	RM	H	H	H	RM	RM	RM	RM	RA	RA	
	G						G	G								
	F						F	F								
	E						E	E								
	A	HD														HD
6P + 12S + 4P																

PART NUMBER	ROWS		POWER						SIGNAL						POWER		
			P8	P7	P6	P5	P4	P3	6	5	4	3	2	1	P2	P1	
4-6450170-1	D		RM		RM		RA		H	H	H	H	H		RM	RM	
	G								G	G	G	G					
	F								F	F	F	F					
	E								E	E	E	E					
2P + 24S + 6P																	

NO CONTACTS LOADED

NO CONTACTS LOADED

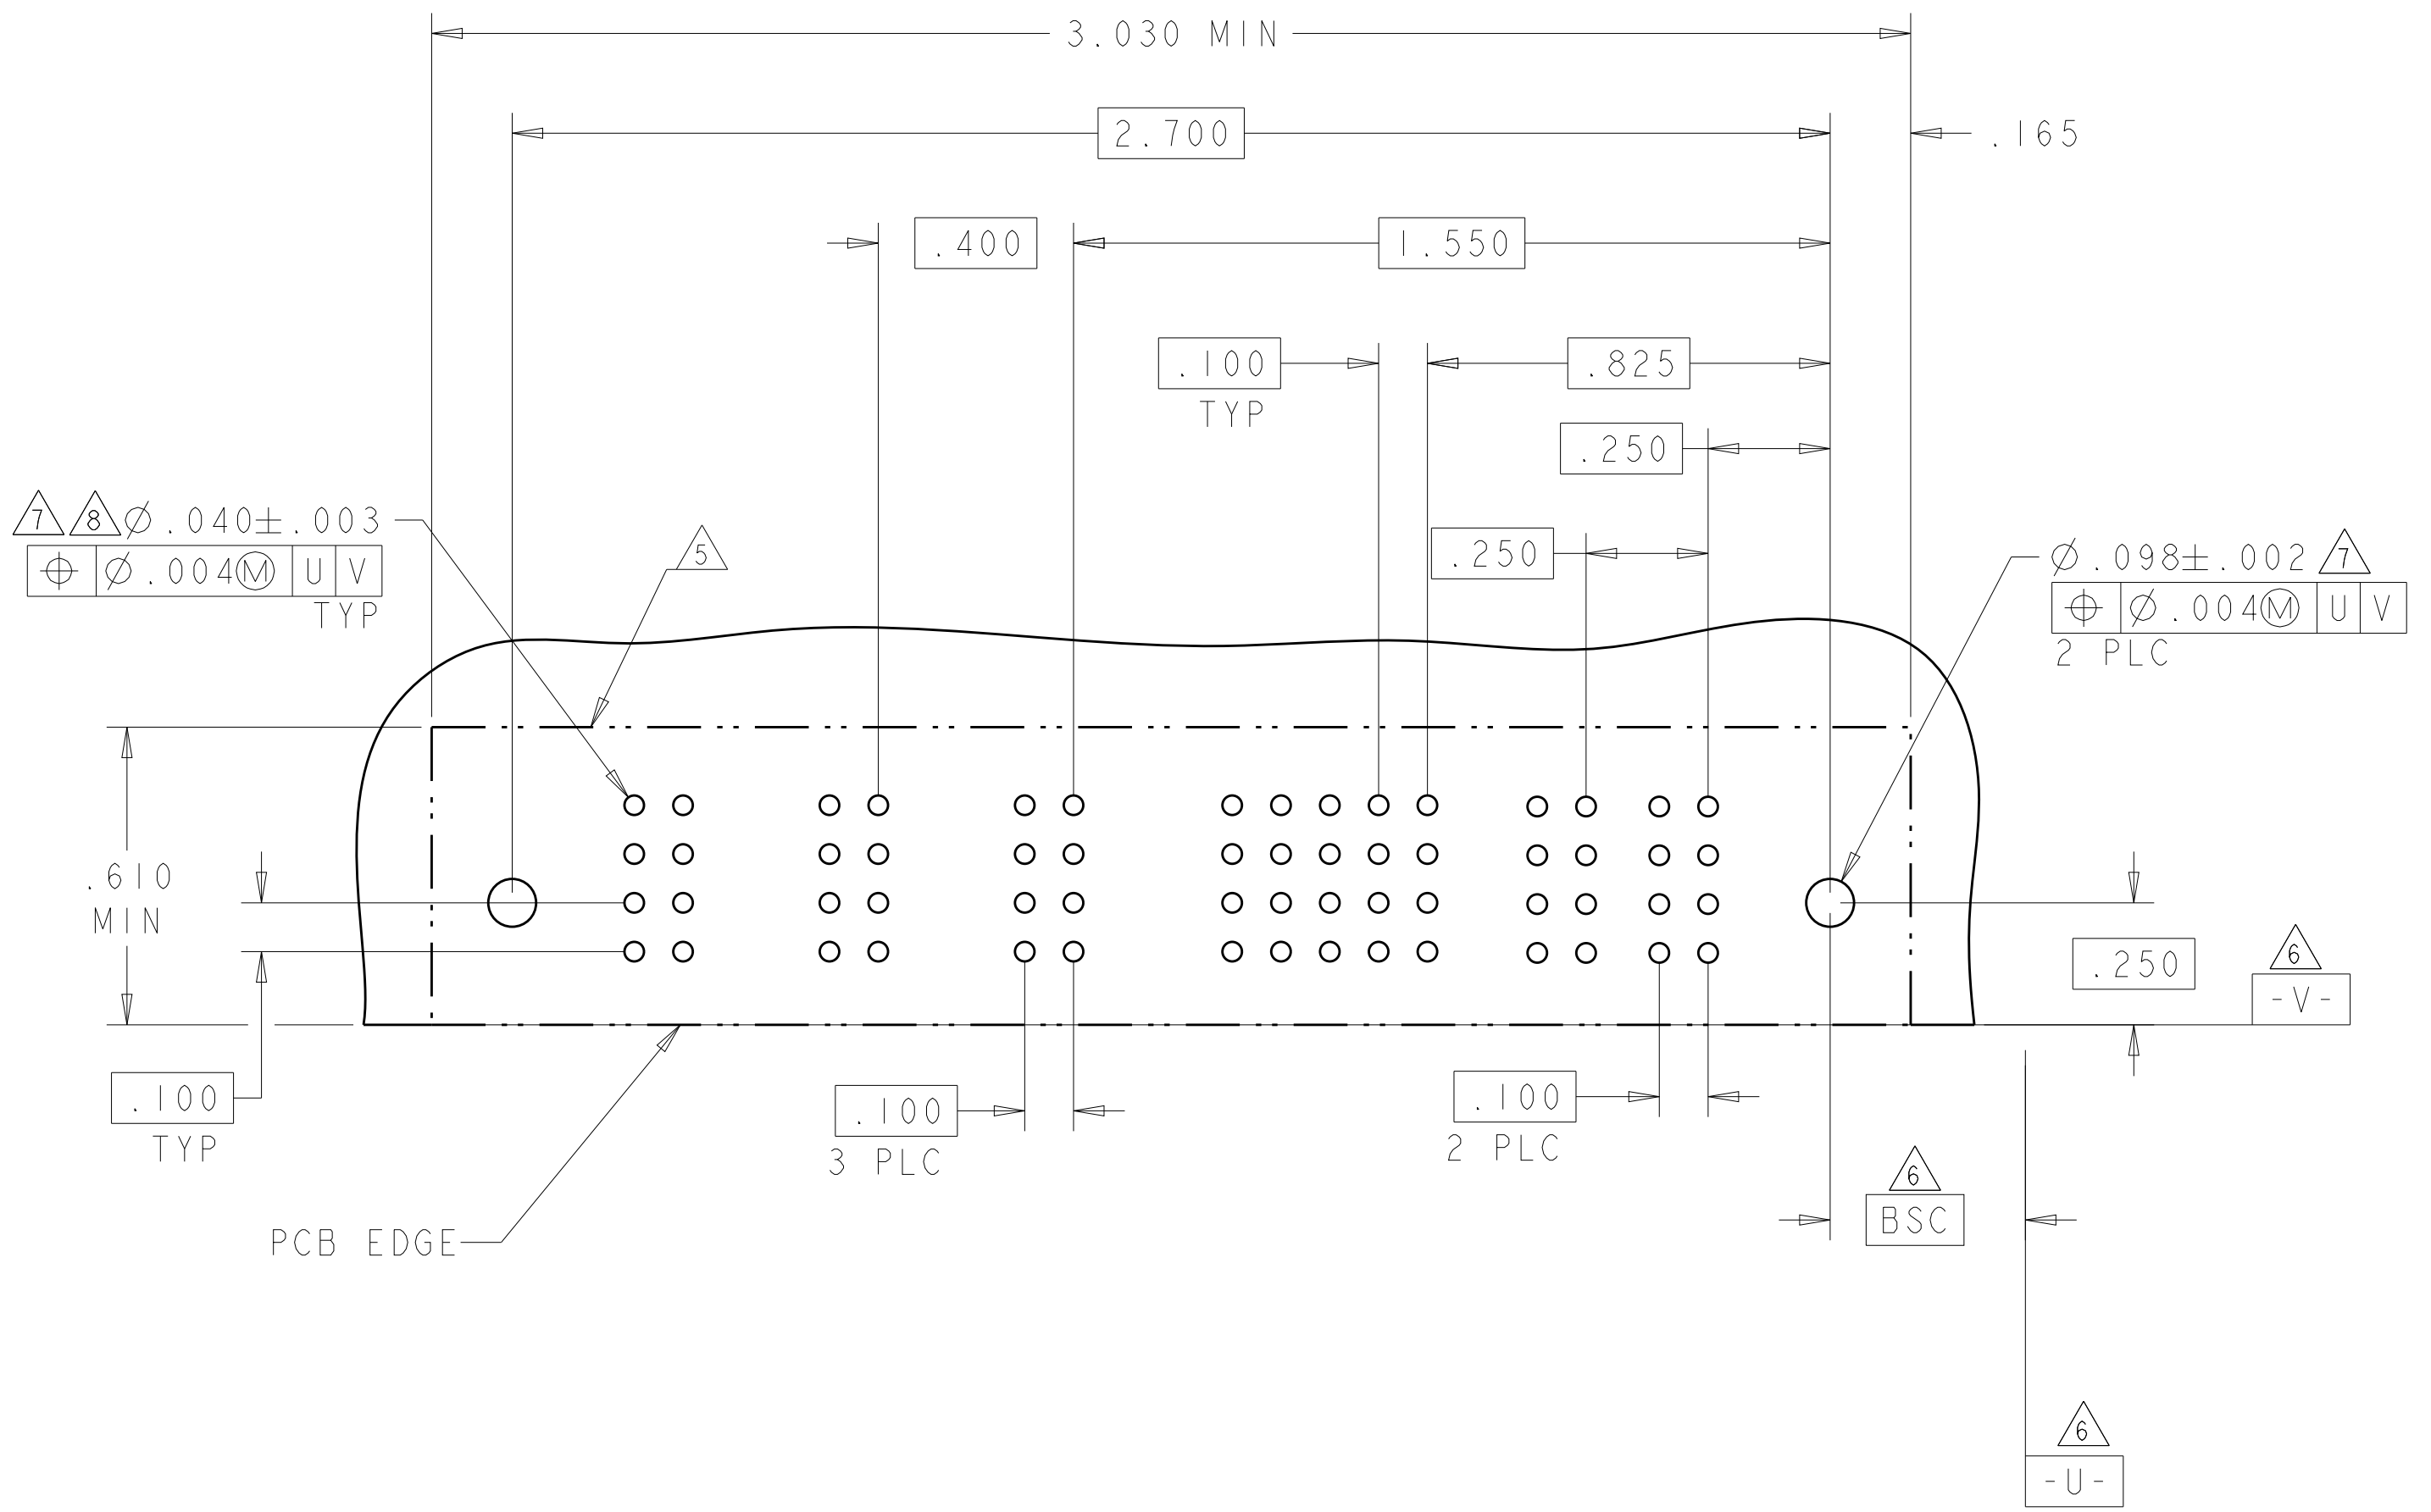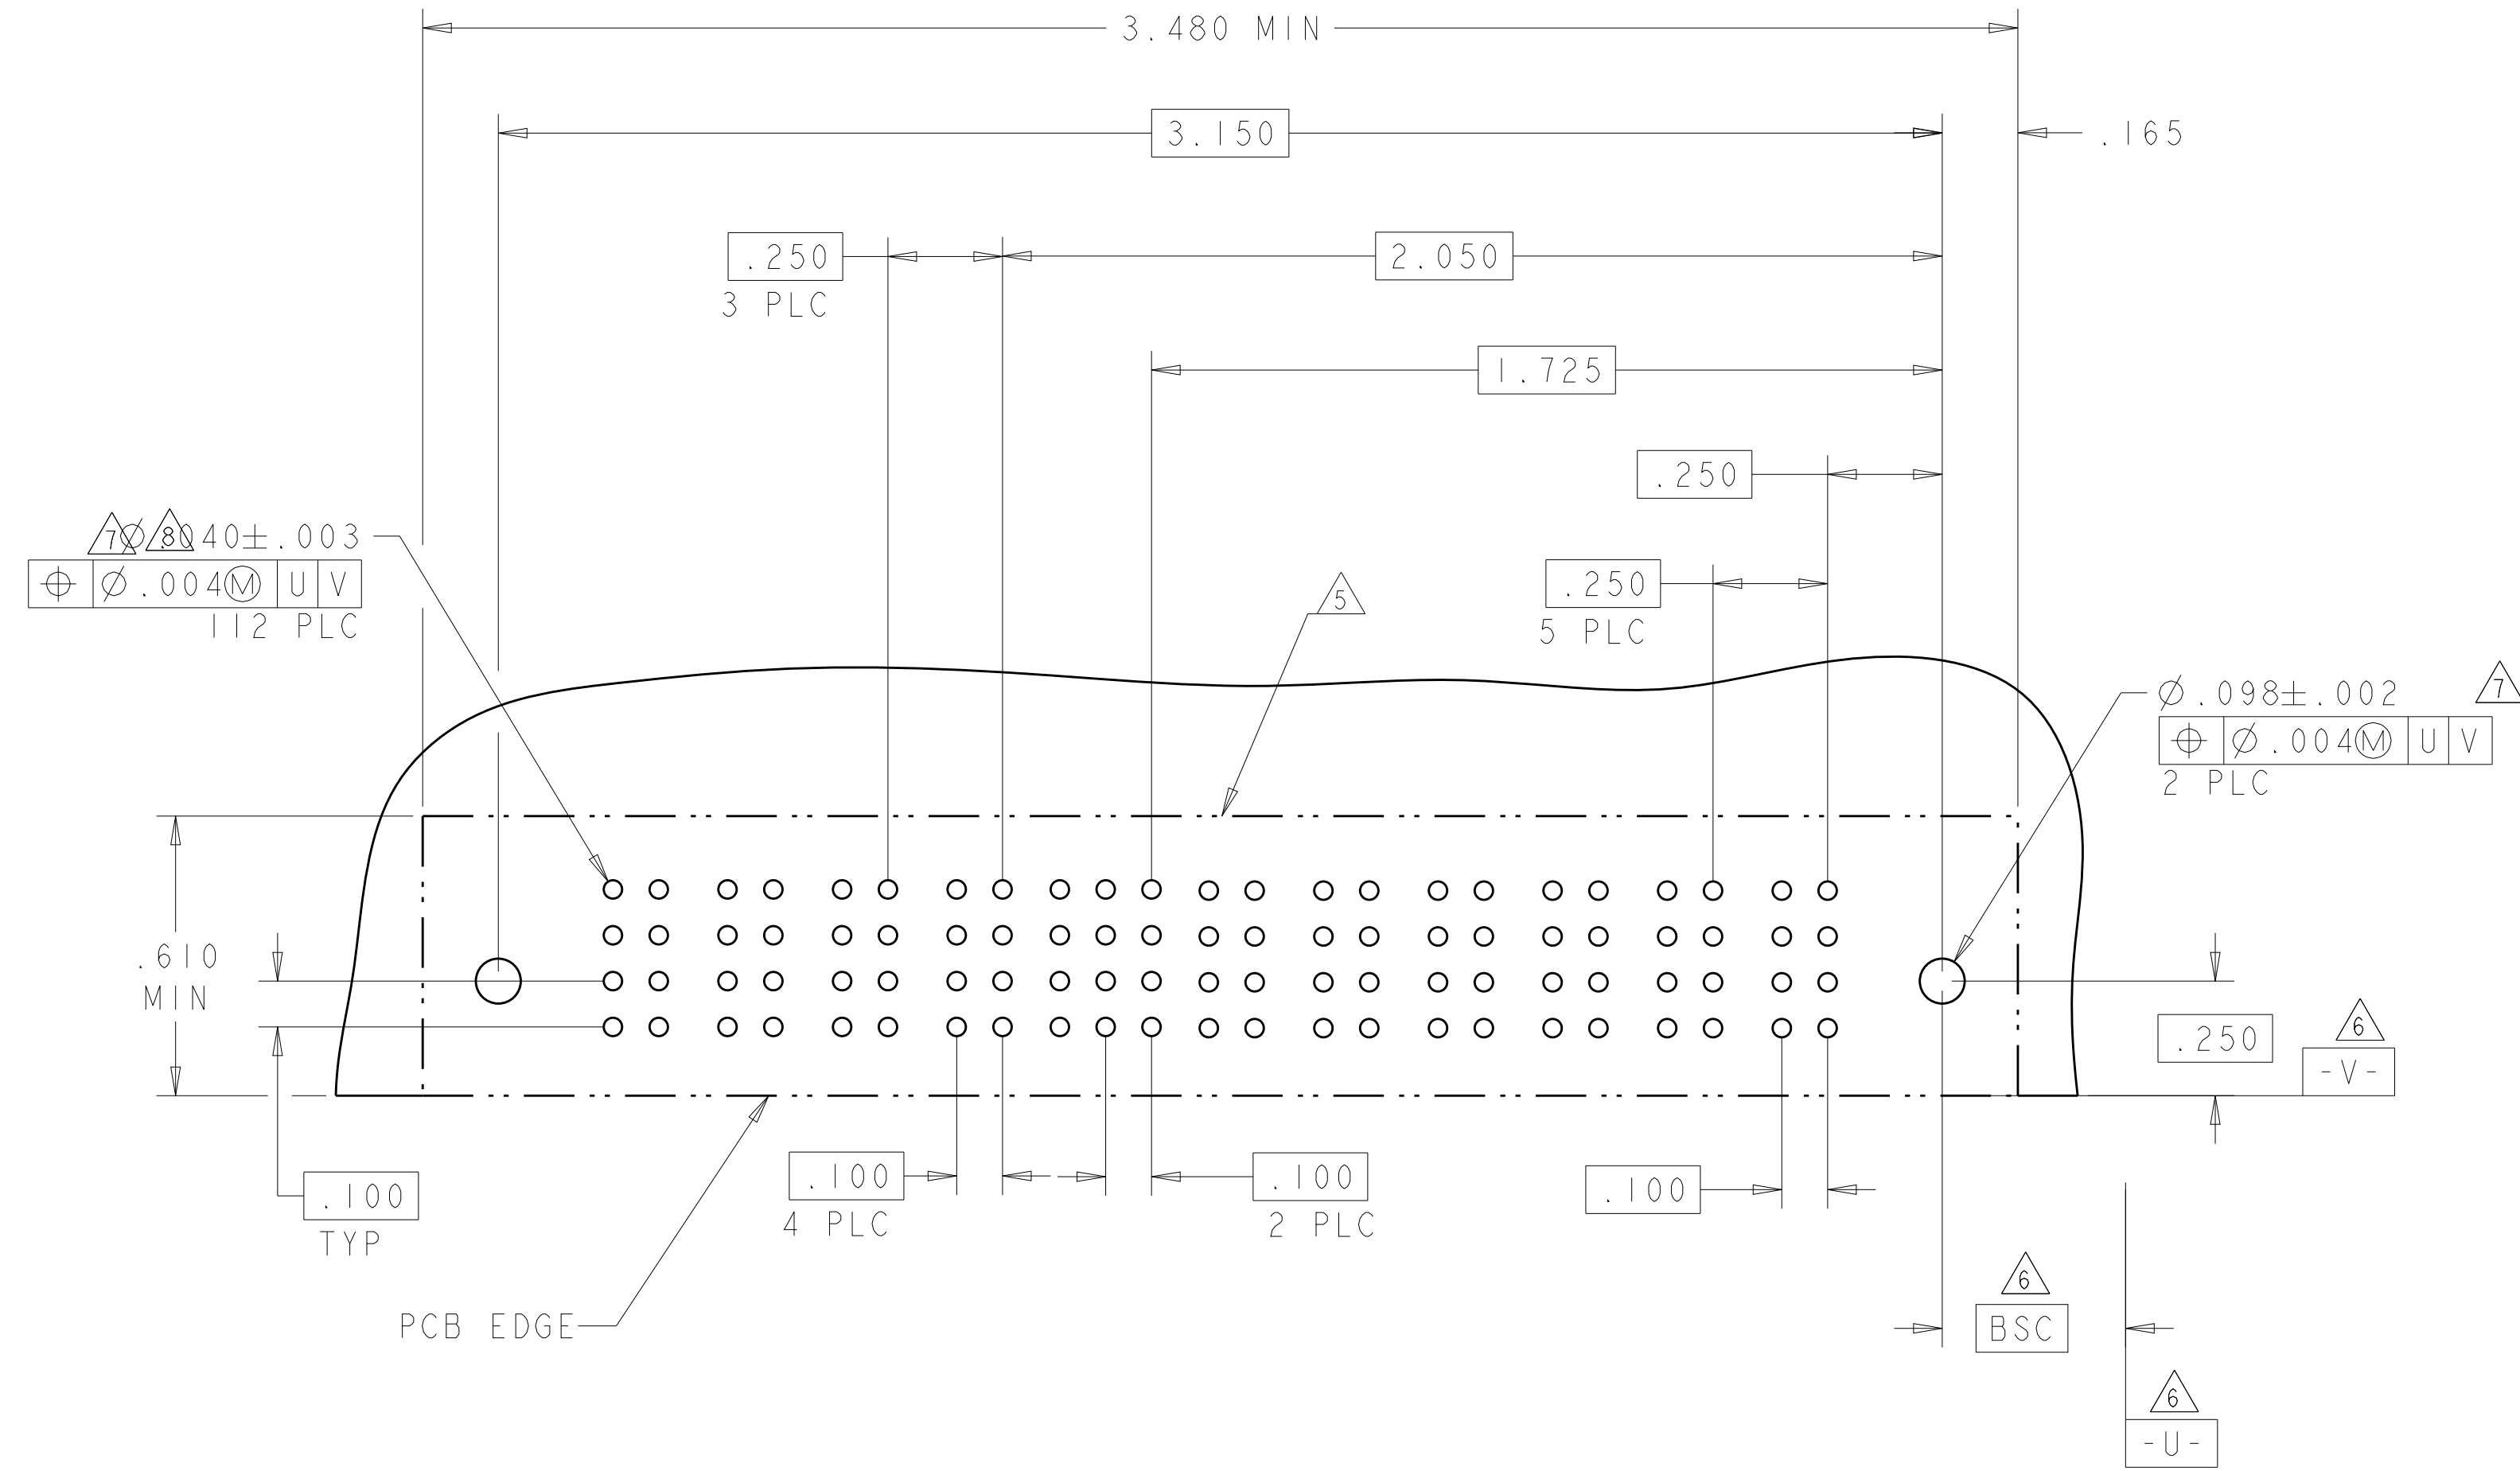

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R.GRZYBOWSKI 21FEB05
CHK M.PERCHERKE 21FEB05
APVD M.PERCHERKE

NAME

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT

MATERIAL

CUSTOMER DRAWING

TE Connectivity

RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE A100779 CAGE CODE 6450170
SHEET 13 OF 13
REV J5

SCALE 4:1

RESTRICTED TO

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-6450170-9](#)