



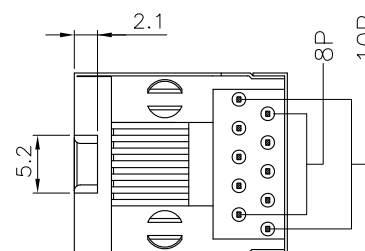

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)  
DIMENSION TOLERANCE: 1 PLC:  $\pm 0.1$  2PLC:  $\pm 0.05$ )

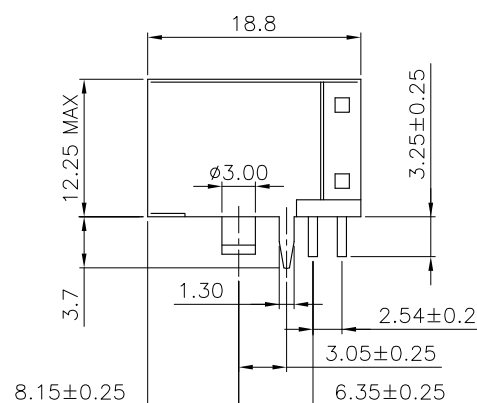

5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER  
D.RENAUD/D.SINISI

OBSOLETE	10P8C	RED	50 μ"	3-1734580-4
			30 μ"	3-1734580-3
			15 μ"	3-1734580-2
			6 μ"	3-1734580-1
OBSOLETE	10P10C	BLACK	50 μ"	1-1734580-4
			30 μ"	1-1734580-3
			15 μ"	1-1734580-2
			6 μ"	1-1734580-1
	10P8C	BLACK	50 μ"	1734580-8
			30 μ"	1734580-7
			15 μ"	1734580-6
			6 μ"	1734580-5
	10P8C	BLACK	50 μ"	1734580-4
			30 μ"	1734580-3
			15 μ"	1734580-2
			6 μ"	1734580-1
	RJ 45	HSG. COLOR	MIN. GOLD THICKNESS	PART NUMBER

SCALE	—	SHEET	1 OF 2	REV	B3
-------	---	-------	--------	-----	----

SEE NOTE

SEE NOTE

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC  
DWDIST  
-

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD



SEE SHEET 1.

MODULAR JACK



TOP COVER

TRAY

CARTON

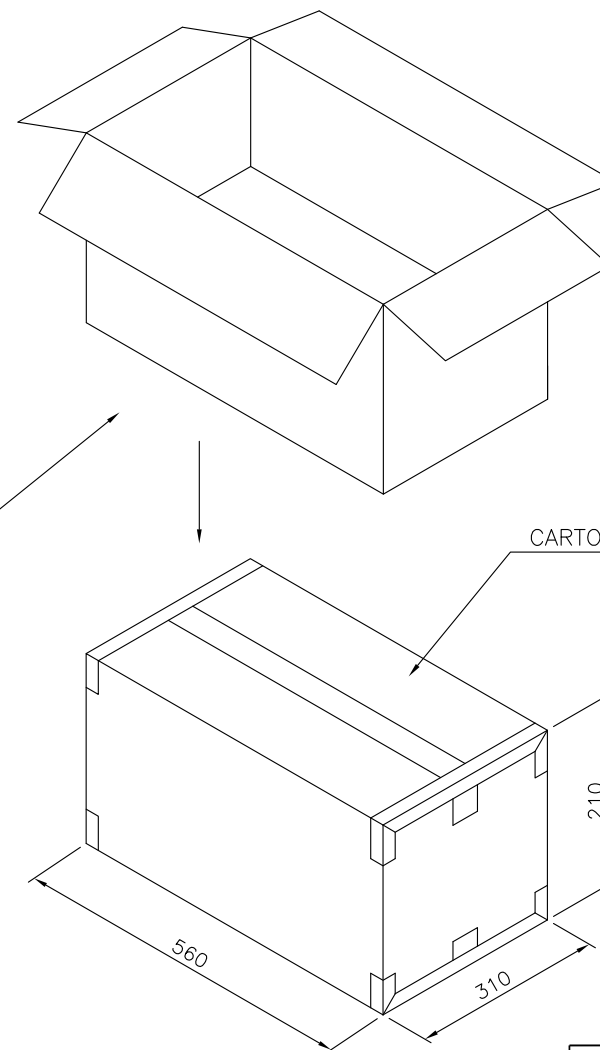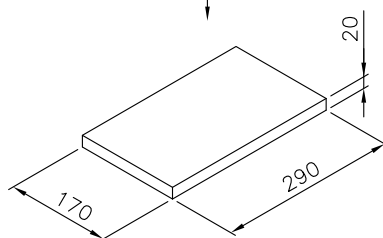

15 Kg	13.5 Kg	100	25	2500 PCS
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAYS /CARTON	QUANTITY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O. HU	01JUN2007	 TE Connectivity	
DIMENSIONS: MM		CHK S. HOU	01JUN2007		
		APVD W.J. KE	01JUN2007		
		PRODUCT SPEC			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		MODULAR JACK, RJ45, 8P8C, SHIELDED, SIDE ENTRY, LOW PROFILE	
0 PLC ± -		WEIGHT	-		
1 PLC ± -		CUSTOMER DRAWING		SIZE A3	CAGE CODE 00779
2 PLC ± -		SCALE		DRAWING NO C=1734580	RESTRICTED TO
3 PLC ± -		SHEET		2 of 2	REV B3
4 PLC ± -		REVISIONS			
ANGLES ± -					
FINISH					
MATERIAL					

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1734580-5](#)