


LOC		DIST		REVISIONS					
AD		39		P	LTR	DESCRIPTION	DATE	DWN	APVD
					0	RELEASED	12-NOV-96	EB	GD

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA, OVER 0.00127 [0.000050] NICKEL, ENTIRE POST.

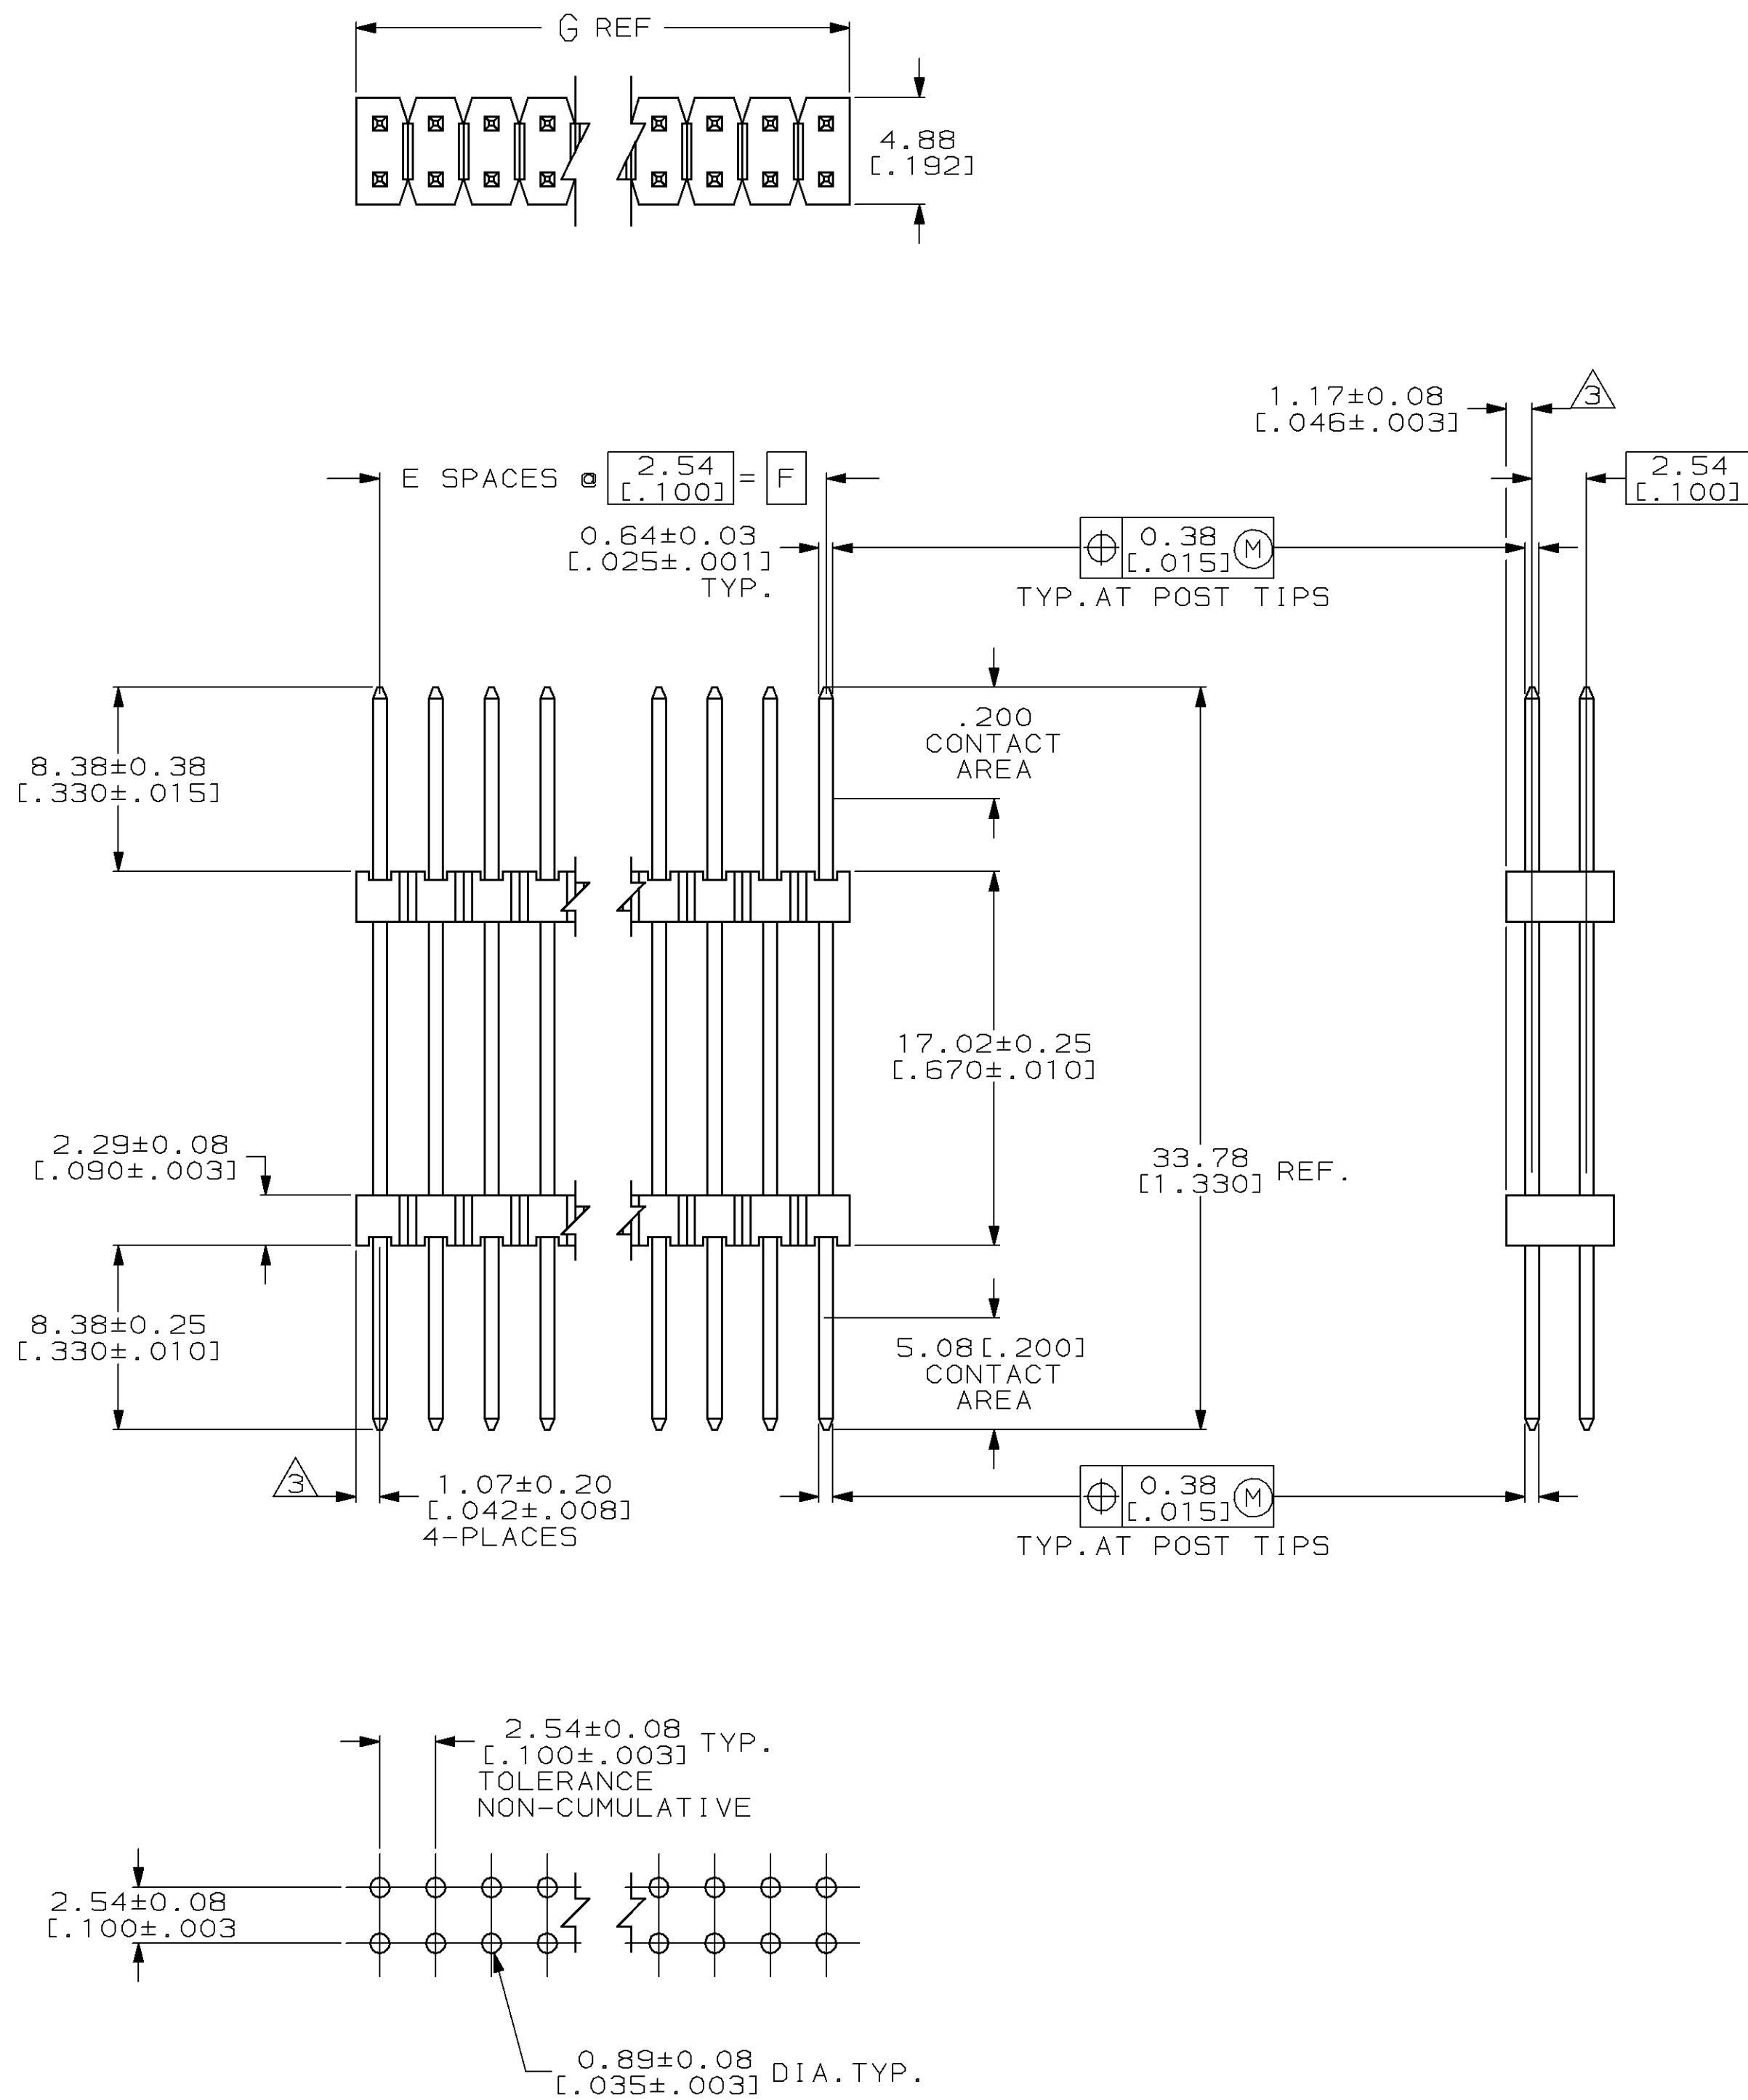

RECOMMENDED HOLE LAYOUT

01.19	99.06	39	80	4-146507-0
[3.984]	[3.900]			
98.65	96.52	38	78	3-146507-9
[3.884]	[3.800]			
96.11	93.98	37	76	3-146507-8
[3.784]	[3.700]			
93.57	91.44	36	74	3-146507-7
[3.684]	[3.600]			
91.03	88.90	35	72	3-146507-6
[3.584]	[3.500]			
88.49	86.36	34	70	3-146507-5
[3.484]	[3.400]			
85.95	83.82	33	68	3-146507-4
[3.384]	[3.300]			
83.41	81.28	32	66	3-146507-3
[3.284]	[3.200]			
80.87	78.74	31	64	3-146507-2
[3.184]	[3.100]			
78.33	76.20	30	62	3-146507-1
[3.084]	[3.000]			
75.79	73.66	29	60	3-146507-0
[2.984]	[2.900]			
73.25	71.12	28	58	2-146507-9
[2.884]	[2.800]			
70.71	68.58	27	56	2-146507-8
[2.784]	[2.700]			
68.17	66.04	26	54	2-146507-7
[2.684]	[2.600]			
65.63	63.50	25	52	2-146507-6
[2.584]	[2.500]			
63.09	60.96	24	50	2-146507-5
[2.484]	[2.400]			
60.55	58.42	23	48	2-146507-4
[2.384]	[2.300]			
58.01	55.88	22	46	2-146507-3
[2.284]	[2.200]			
55.47	53.34	21	44	2-146507-2
[2.184]	[2.100]			
52.93	50.80	20	42	2-146507-1
[2.084]	[2.000]			
50.39	48.26	19	40	2-146507-0
[1.984]	[1.900]			
47.85	45.72	18	38	1-146507-9
[1.884]	[1.800]			
45.31	43.18	17	36	1-146507-8
[1.784]	[1.700]			
42.77	40.64	16	34	1-146507-7
[1.684]	[1.600]			
40.23	38.10	15	32	1-146507-6
[1.584]	[1.500]			
37.69	35.56	14	30	1-146507-5
[1.484]	[1.400]			
35.15	33.02	13	28	1-146507-4
[1.384]	[1.300]			
32.61	30.48	12	26	1-146507-3
[1.284]	[1.200]			
30.07	27.94	11	24	1-146507-2
[1.184]	[1.100]			
27.53	25.40	10	22	1-146507-1
[1.084]	[1.000]			
24.99	22.86	9	20	1-146507-0
[.984]	[.900]			
22.45	20.32	8	18	146507-9
[.884]	[.800]			
19.91	17.78	7	16	146507-8
[.784]	[.700]			
17.37	15.24	6	14	146507-7
[.684]	[.600]			
14.83	12.70	5	12	146507-6
[.584]	[.500]			
12.29	10.16	4	10	146507-5
[.484]	[.400]			
9.75	7.62	3	8	146507-4
[.384]	[.300]			
7.21	5.08	2	6	146507-3
[.284]	[.200]			
4.67	2.54	1	4	146507-2
[.184]	[.100]			
2.13	-	-	2	146507-1
[.084]	-			
G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTINUATION OF AMP INCORPORATED'S DRAWING NUMBER 00779 AND THE COMPANY'S DRAWING NUMBER 17105-3608. QUANTITIES SHOWN ARE QUANTITIES FOR THE LATEST REVISION.		DWN 12-NOV-56 E.C. BRANDBERG 12-NOV-56 G. DUBNICKI 12-NOV-56 AMP G. DUBNICKI 12-NOV-56		AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm (INCH)		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLOC ± 2 PLOC ± 0.51 (.02) 0.127 (.005) 0.0127 (.0005) 2. ± ANGLE 8°		HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED	
MATERIAL		FINISH		PRODUCT SPEC — APPLICATION SPEC — SIZE A1 CAGE CODE 00779 DRAWING NO C-146507 SCALE 4:1 SHEET 1 OF 1 REV 0	
				CUSTOMER DRAWING	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-146507-0](#)