
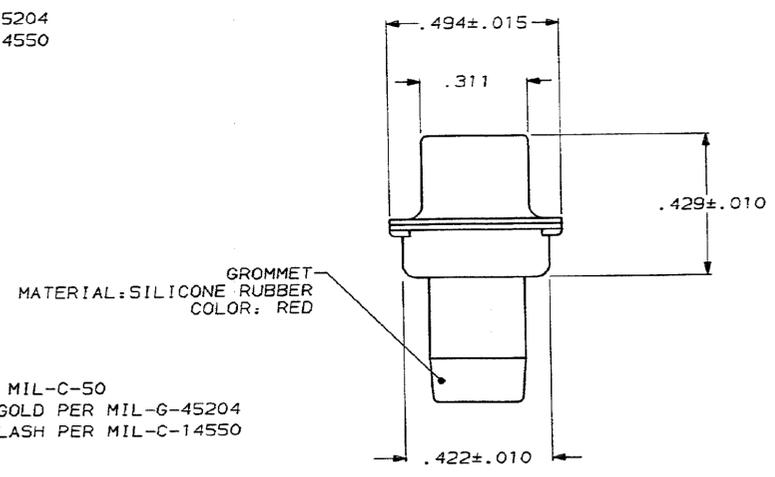
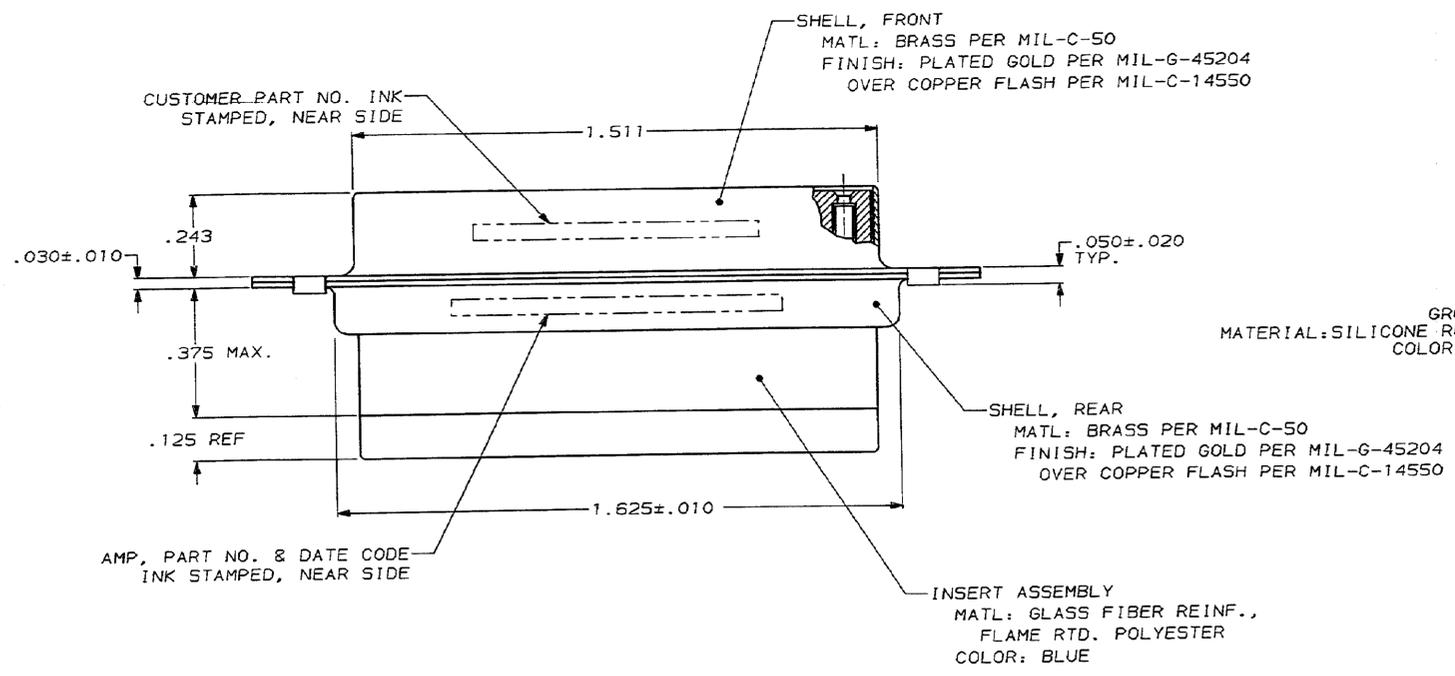


5066		LOC	DIST	REVISONS		DATE	APPD
DF	DO	P	F	ZONE	LTR	DESCRIPTION	
				Q		RELEASED	J.A. 11-9-87
				A		REV-ECN DF-1034	MC 2-23-89

- 445108-1
1. THIS PLUG WILL MATE WITH ANY 25 POSN., SIZE 3 RECEPTACLE IN AMPLIMITE SERIES.
  2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS PLUG IS .068 DIA.
  3. BE-CU RETENTION CLIPS ARE INCLUDED IN INSERT ASSEMBLY.
  4. CONNECTOR SUPPLIED WITHOUT CONTACTS; SHOWN FOR ILLUSTRATION ONLY.
  5. THIS RECEPTACLE IS DESIGNED TO CONFORM TO THE LATEST ISSUE OF MIL-C-24308. EXCEPT CONTACT INSERTION FORCE WILL BE 6 LB. MAX. INSTEAD OF 3 LB. MAX. AS SPECIFIED IN MIL-C-24308, 3.5.3.
- ▲ UL/CSA DESIGNATION STAMPED IN THIS AREA.

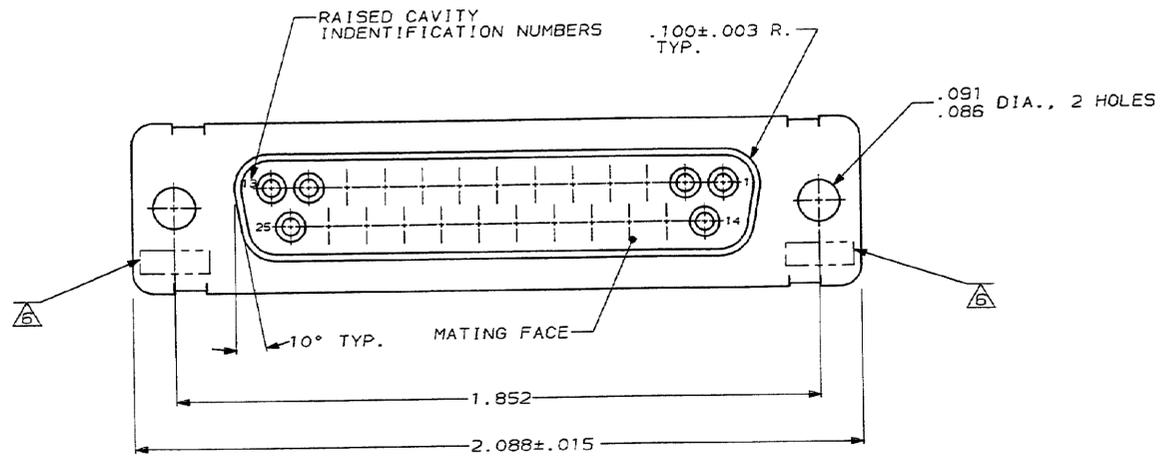

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON:		DR		PART NO	
2 PLC DEC ±	3 PLC DEC ± .005	CHK 11-18-87	11-9-87	AMP   AMP INCORPORATED Harrisburg, Pa. 17106	
ANGLES ± 0°30'		F.BALLEW III		NAME	
MATERIAL	SEE CALLOUTS	APPD 11-18-87		RECEPTACLE FOR SOCKET CONTACTS, HI-DENSITY "HD-20" CONNECTOR, SIZE 3, 25 POSN., NON-MAG, SPCL.	
FINISH	SEE CALLOUTS	F.BALLEW III		SIZE	FSCM NO
		APPD 11-18-87		D	00779
		D.J.M.		DRAWING NO	445108
		PRODUCT SPEC		SCALE	4:1
		APPLICATION SPEC		SHEET	1 OF 1
		WEIGHT			

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[445108-1](#)