

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.

©

COPYRIGHT

2011



BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.


LOC
DWDIST
—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
F3		REVISED (ECR-14-011432)	28JUL14	S.C.	H.L.



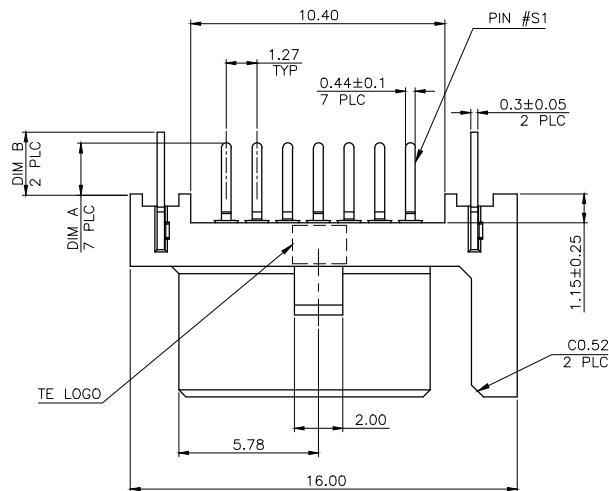


SECTION C-C

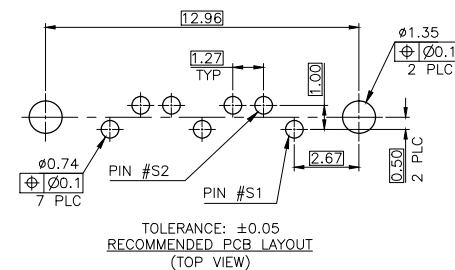


NOTE:

- MATERIAL:
HOUSING: LCP WITH 30% GF, UL 94V-0, BLACK COLOR.
OR
PA6T WITH 30% GF, 33% REGRIND, UL 94V-0, BLUE OR WHITE COLOR.
CONTACTS: BRASS.
BOARDLOCKS: BRASS.
- FINISH:
CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA, $2.54\mu\text{m}$ [$100\mu''$] MIN.
MATTE-TIN ON SOLDER TAIL, WITH ENTIRE CONTACT UNDERPLATED
 $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL.
BOARDLOCKS: $2.54\mu\text{m}$ [$100\mu''$] MIN. MATTE-TIN OVER $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL.
- WAVE SOLDER CAPABLE TO 265°C PER TEST SPEC. 109-202, CONDITION B.

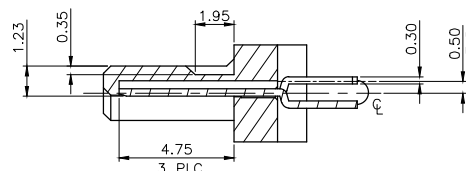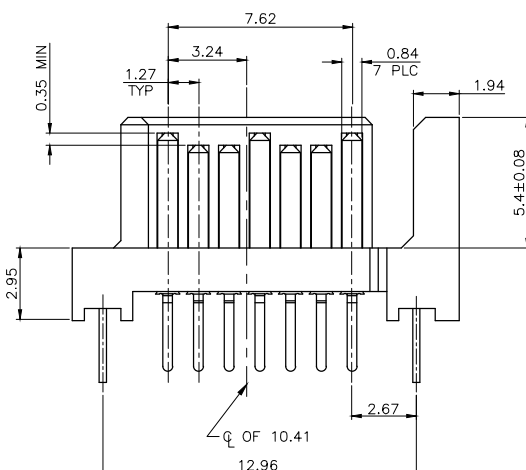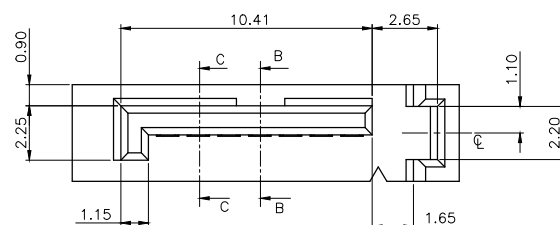

SECTION B-B

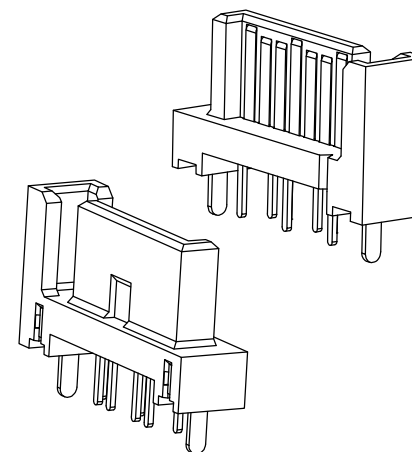

3.37	3.3	BLUE (293C)	0.381μm [15μ"]	1-1734699-5	OBSOLETE	
		BLACK		1-1734699-4		
3.37	3	BLUE (293C)	0.381μm [15μ"]	1-1734699-3	OBSOLETE	
		BLACK	0.381μm [15μ"]	1-1734699-2		
2.57	2.05	WHITE	0.762μm [30μ"]	1734699-9	OBSOLETE	
			0.381μm [15μ"]	1734699-8		
			GOLD FLASH	1734699-7		OBSOLETE
		BLUE (293C)	0.762μm [30μ"]	1734699-6	OBSOLETE	
			0.381μm [15μ"]	1734699-5		
			GOLD FLASH	1734699-4		OBSOLETE
			0.762μm [30μ"]	1734699-3		OBSOLETE
			0.381μm [15μ"]	1734699-2		AVAILABLE
		BLACK	GOLD FLASH	1734699-1	OBSOLETE	
B		A	HOUSING COLOR	MIN. GOLD THICKNESS	PART NUMBER	STATUS
DIMENSIONS						

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN A. WU 06JUN2008

CHK S. HOU 06JUN2008

APVD W. KODAMA 06JUN2008

PRODUCT SPEC

108-57469

APPLICATION SPEC

—

WEIGHT 0.48 GRAMS

CUSTOMER DRAWING




TE Connectivity


SERIAL ATA, 7 POS., PLUG,
VERTICAL, A TYPE, DIP.

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=1734699	—


SCALE	SHEET	REV
—	1 of 2	F3

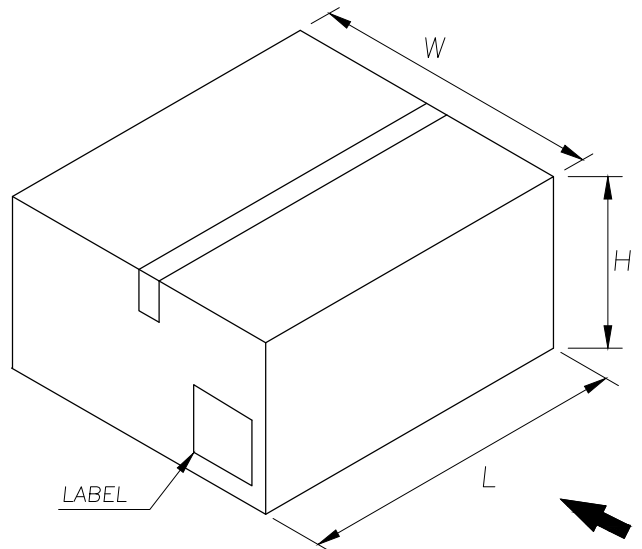


SHIPPING BOX

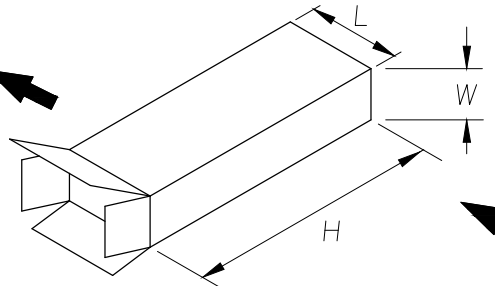


INNER CARTON



SHEAF



TUBE



- NOTE:
- 1. DIMENSION:
TUBE: L= 340, W= 12.65, H= 5.8
INNER CARTON: L= 140, W= 77, H= 355
SHIPPING BOX: L= 372, W= 293, H= 172
 - 2. QUANTITY:
20 PCS/TUBE
50 TUBES/SHEAF
2 SHEAFS/INNER CARTON
4 INNER CARTONS/SHIPPING BOX
8000 PCS/SHIPPING BOX
 - 3. WEIGHT:
NET WEIGHT: 7.5 KG
GROSS WEIGHT: 8.5 KG

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity	
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME	
0 PLC ± -		PRODUCT SPEC		SERIAL ATA, 7 POS., PLUG, VERTICAL, A TYPE, DIP.	
1 PLC ± -		APPLICATION SPEC		SIZE	
2 PLC ± -		WEIGHT		CAGE CODE	
3 PLC ± -		CUSTOMER DRAWING		DRAWING NO	
4 PLC ± -				RESTRICTED TO	
ANGLES ± -				A300779C=1734699	
MATERIAL				SCALE	
FINISH				SHEET 2 OF 2	
				REV F3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1734699-2](#)