


SCALA NON IMPEGNATIVA
(DO NOT SCALE)
DIMENSIONI IN mm
(DIMENSIONS IN mm)

METRIC


PROIEZIONE EUROPEA
(EUROPEAN PROJECTION)

SCHEMA FORATURA CIRCUITO, SPESORE 1.6±0.15
(PCB HOLE PATTERN THICKNESS 1.6±0.15)

Ø3.2 ±0.1

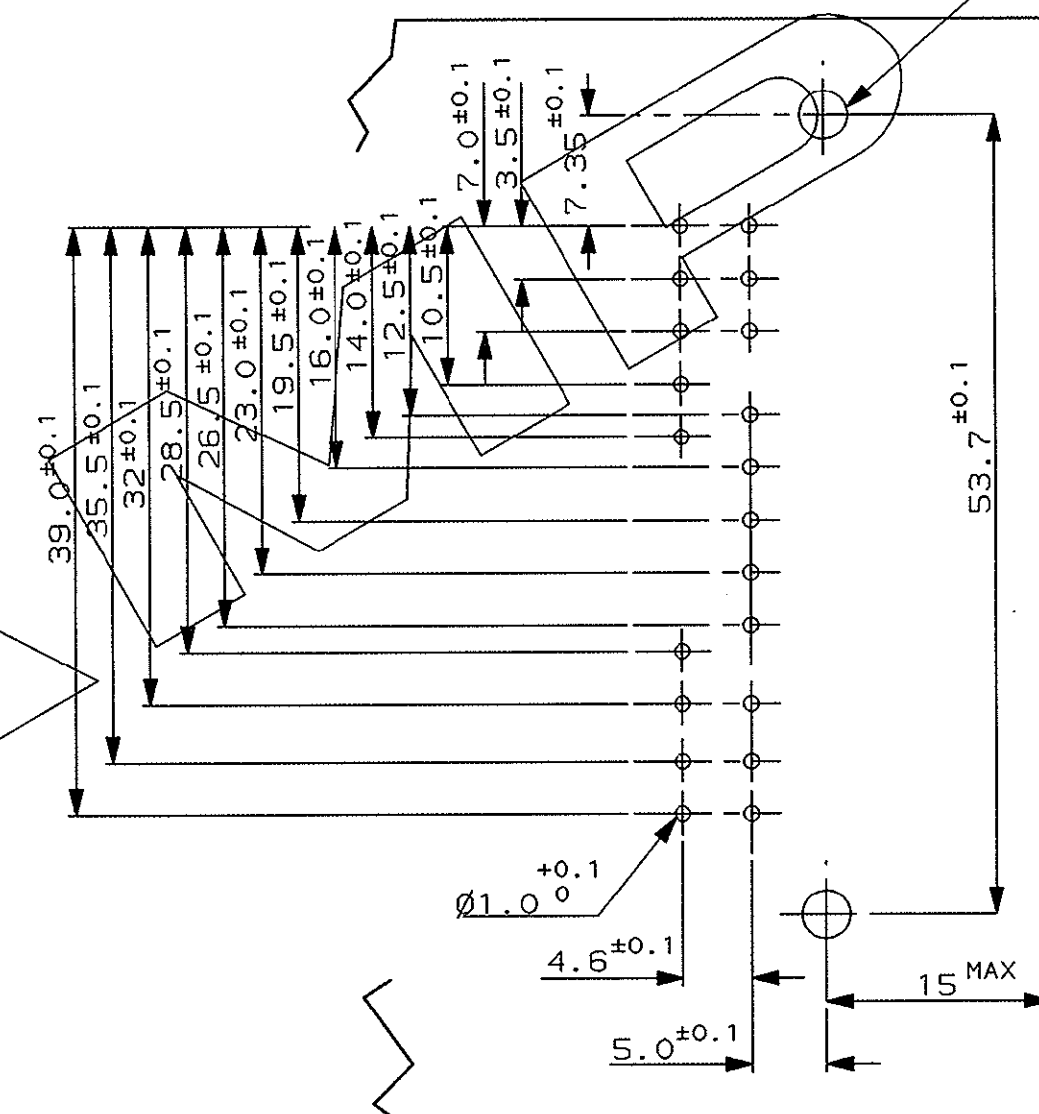

SEZIONE A-A
(SECTION A-A)

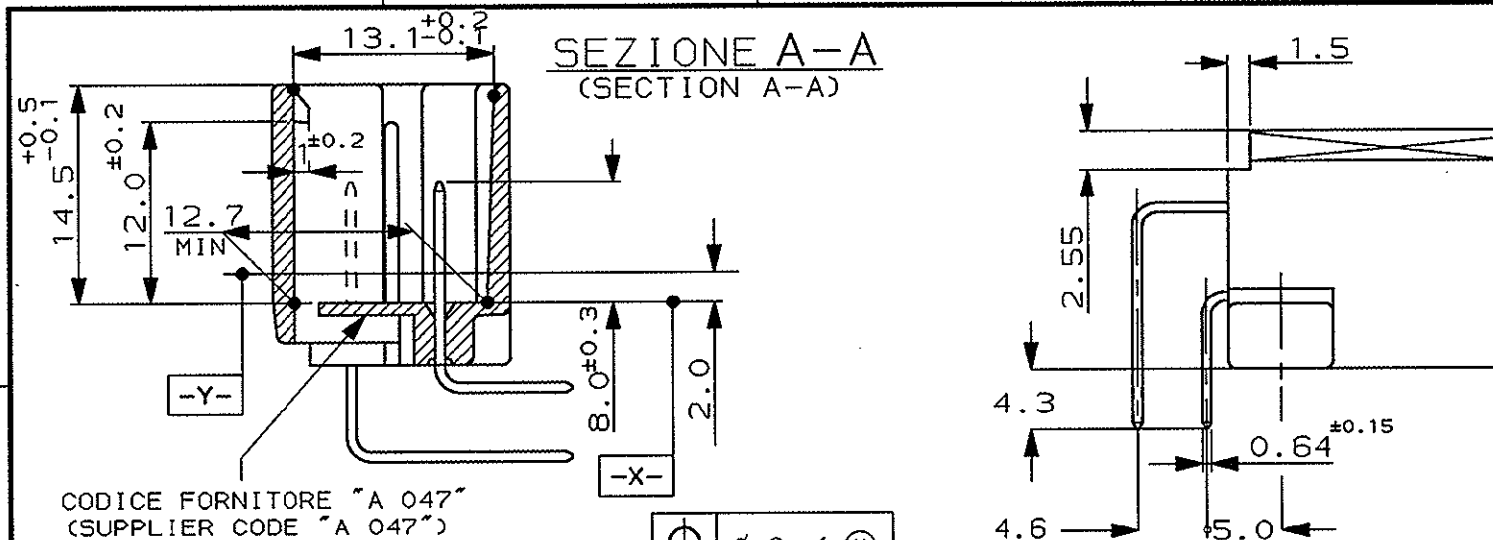


CODICE FORNITORE "A 047"
(SUPPLIER CODE "A 047")

Ø 0.4 (M)
(TYPx20)

NUM. DI CAVITA'
(CIRCUIT IDENTIF. NO.)

NO. IMPRONTA STAMPO
(MOULD CAVITY
IDENTIF. NO.)

2.4 ±0.2
(2PLC)

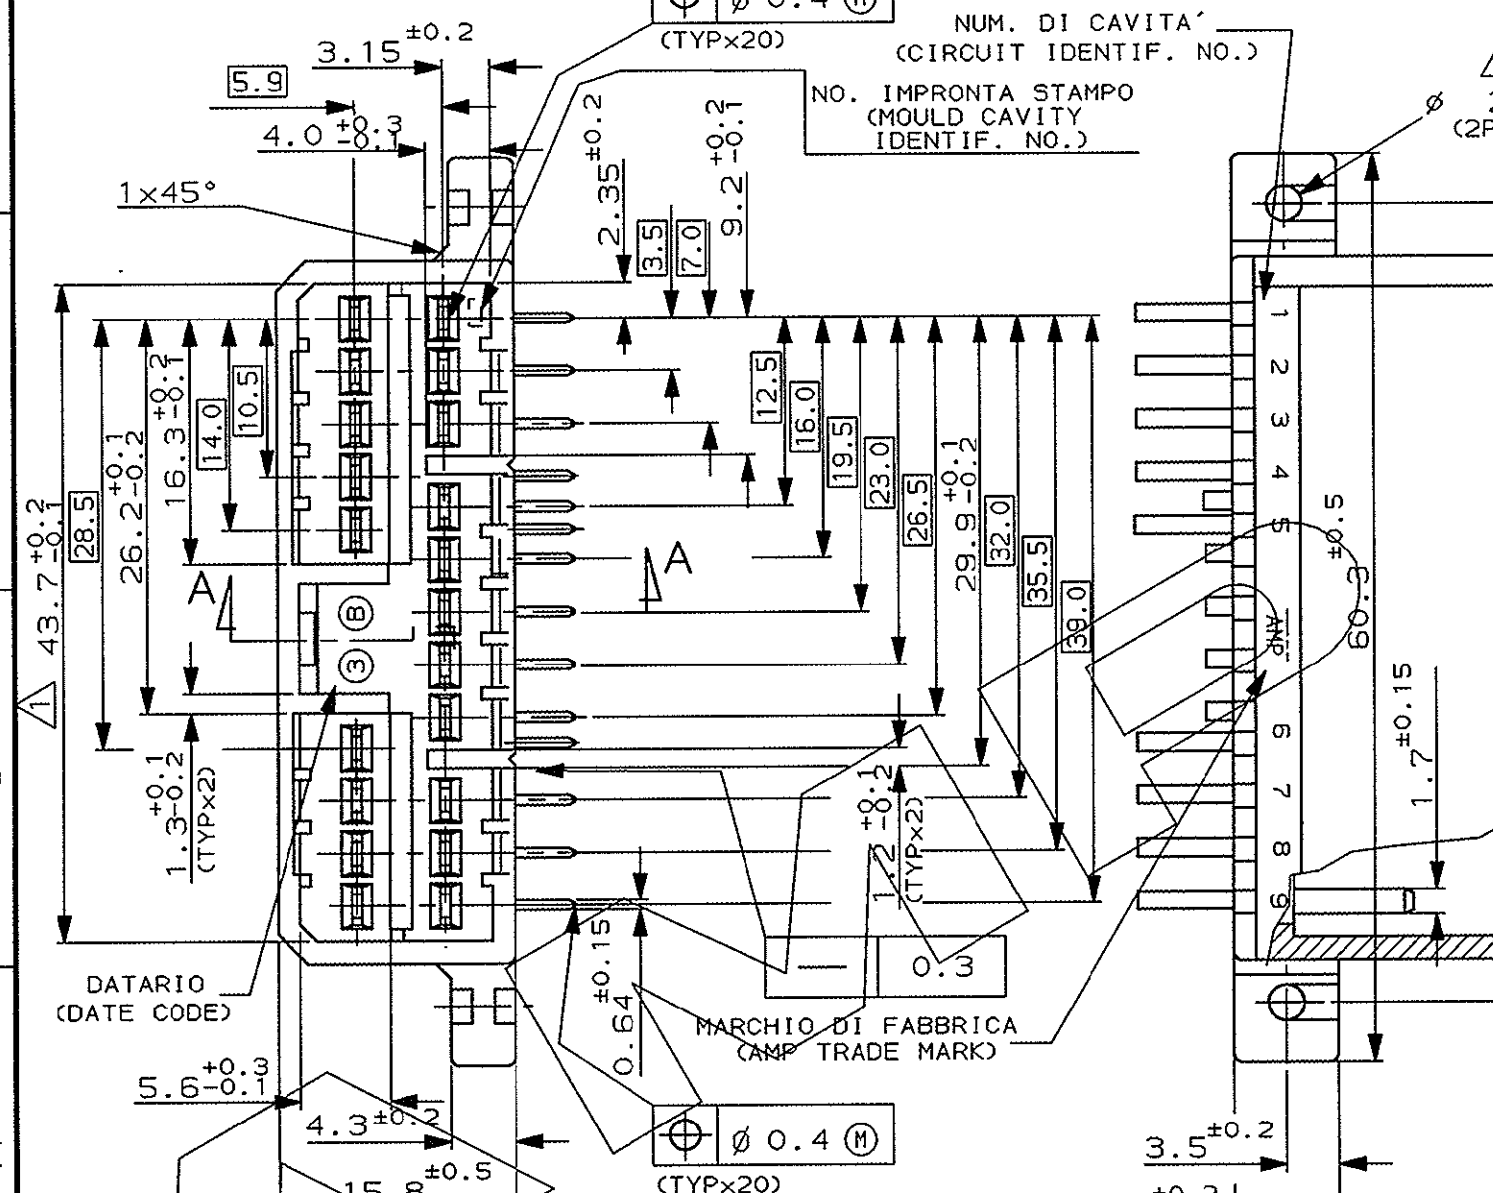

DATARIO
(DATE CODE)

MARCHIO DI FABBRICA
(AMP TRADE MARK)

Ø 0.4 (M)
(TYPx20)

- QUOTE MISURATE TRA I PIANI -X- E -Y-.
(DIMENSIONS MUST BE KEPT BETWEEN -X- AND -Y-).
- FORI PER DUE VITI AUTOFILETTANTI M3, DA APPLICARE PRIMA DELLA STAGNATURA AD ONDA.
(HOLES FOR TWO TAPPING SCREWS M3, BEFORE SOLDERING OPERATION).
- BLOCCHETTO ADATTO PER CONTROPARTE PLUG 20 VIE P/N 282369-1 E P/N 174952-1
(HOUSING SUITABLE FOR PLUG 20 POSITION P/N 282369-1 AND P/N 174952-1).
- TAB IN OTTONE STAGNATO
(TAB: BRASS TIN PLATED)

BIANCO (WHITE)	PBT NAT. (PBT UNFILLED)	282632-1
FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	NUMERO (PART NUMBER)

CUSTOMER DWG. FOR REFERENCE ONLY	DISEGNO PER CLIENTE SOLO PER RIFERIMENTO
-------------------------------------	---

THIS DRAWING IS UNPUBLISHED	RELEASE FOR PUBLICATION	-49-
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING	TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)	DIAM. ISOLANTE (INS. DIA. RANGE)
		RANGO FILO (WIRE RANGE)
		SCALA (SCALE)

AMP	AMP ITALIA S.p.A. Corso F.lli Cervi, 15 COLLEGNO (TORINO)
DESCRIZIONE (DESCRIPTION)	070 Sr. MULTILOCK* CONN. HEADER, 20 POSITION HORIZONTAL TYPE
LOC. SIZE NUMERO (DWG NO)	REV. FOGLIO (SHEET)
I A3 C - 282632	B 1 DI 4

REV.	REVISIONI (REVISION RECORD)	DIS.	DATA (DATE)
B	REVISED FOR ET00-0025-04	M.P.	23-2 '04
A3	ADDED NEW DASHES -2/-3/-4 (NOT YET RELEASED FOR PRODU.) WITH ECN ET00-0257-98	M.P.	29-7 '97
A2	REVISED FOR ET00-0352-97	M.P.	29-7 '97
A1	RELEASED FOR PROD.-1 ET00-0072-97 -1 IN PRODUZIONE CON ET00-0072-97	M.P.	27-2 '97
A	PRIMA EMISSIONE ET00-0049-96 FIRST ISSUE ET00-0049-96	M.P.	6-6 '96

SCALA NON IMPEGNATIVA
(DO NOT SCALE)
DIMENSIONI IN mm
(DIMENSIONS IN mm)

METRIC

PROIEZIONE EUROPEA
(EUROPEAN PROJECTION)

SCHEMA FORATURA CIRCUITO, SPESSORE 1.6±0.15
(PCB HOLE PATTERN THICKNESS 1.6±0.15)

Ø3.2 ±0.1

SEZIONE A-A
(SECTION A-A)


CODICE FORNITORE "A 047"
(SUPPLIER CODE "A 047")

Ø 0.4 (M)
(TYPx20)

NUM. DI CAVITA'
(CIRCUIT IDENTIF. NO.)

NO. IMPRONTA STAMPO
(MOULD CAVITY IDENTIF. NO.)

2.4 ±0.2
(2PLC)

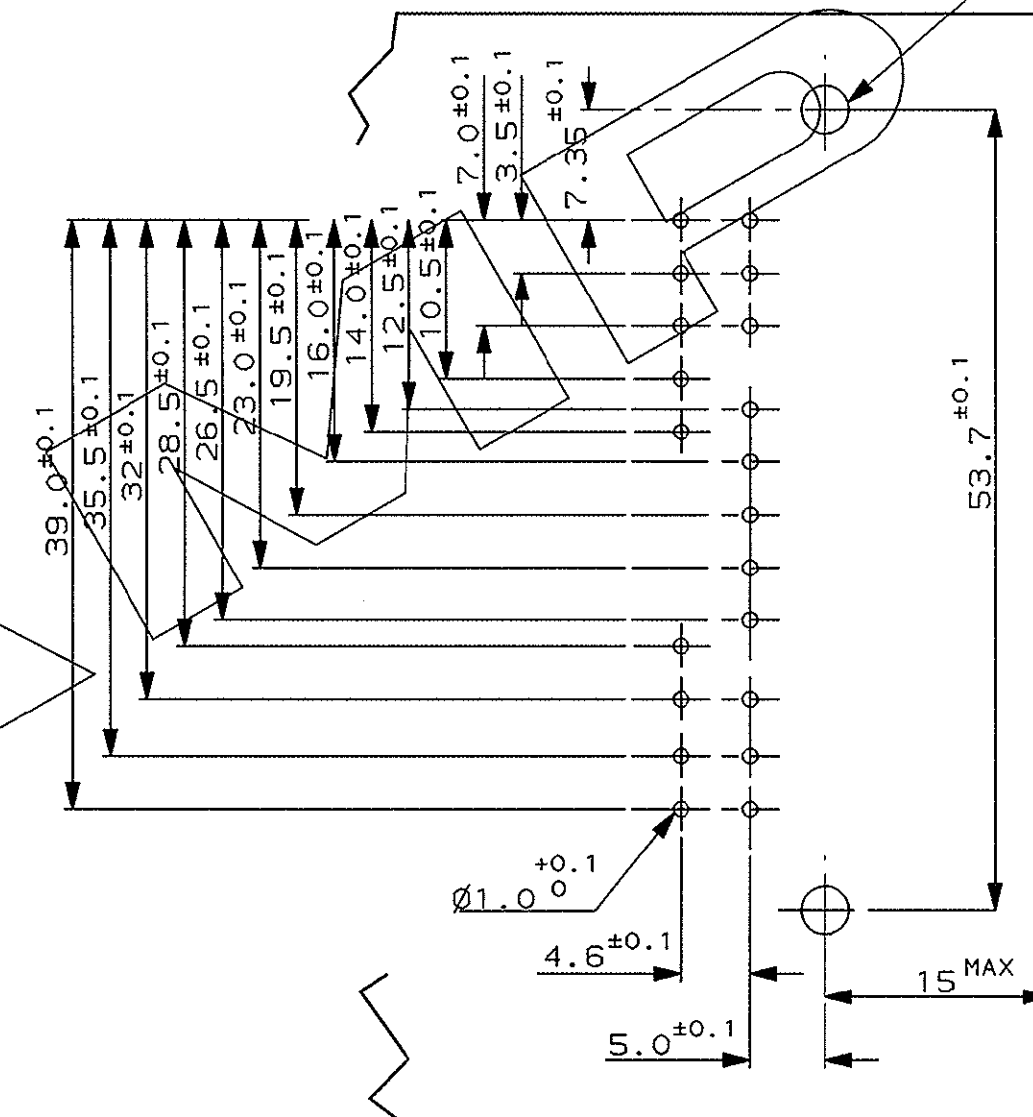



DATARIO
(DATE CODE)

MARCHIO DI FABBRICA
(AMP TRADE MARK)

Ø 0.4 (M)
(TYPx20)

- 1) QUOTE MISURATE TRA I PIANI -X- E -Y-.
(DIMENSIONS MUST BE KEPT BETWEEN -X- AND -Y-).
- 2) FORI PER DUE VITI AUTOFILETTANTI M3, DA APPLICARE PRIMA DELLA STAGNATURA AD ONDA.
(HOLES FOR TWO TAPPING SCREWS M3, BEFORE SOLDERING OPERATION).
- 3) BLOCCHETTO ADATTO PER CONTROPARTE PLUG 20 VIE P/N 282369-2.
(HOUSING SUITABLE FOR PLUG 20 POSITION P/N 282369-2)
- 4) TAB IN OTTONE STAGNATO
(TAB: BRASS TIN PLATED)

NERO (BLACK)	PBT NAT. (PBT UNFILLED)	282632-2
FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	NUMERO (PART NUMBER)
CUSTOMER DWG. FOR REFERENCE ONLY		DISEGNO PER CLIENTE SOLO PER RIFERIMENTO
THIS DRAWING IS UNPUBLISHED		RELEASE FOR PUBLICATION
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING		
TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)	DIAM. ISOLANTE (INS. DIA. RANGE)	RANGO FILO (WIRE RANGE)
± 0.3	-	-
ANGOLI (ANGLES)	± 2°	SCALA (SCALE)
DIS. (DR.)	AMP AMP ITALIA S.p.A. Corso F.lli Cervi, 15 COLLEGNO (TORINO)	
CONT. (CHK.)	DESCRIZIONE (DESCRIPTION) 070 Sr. MULTILOCK* CONN. HEADER, 20 POSITION HORIZONTAL TYPE	
APP. (APP.)	LOC. SIZE (DWG NO)	REV. FOGLIO (SHEET)
REV. REVISIONI (REVISION RECORD)	DIS. DATA (DR) (DATE)	I A3 C- 282632 B 2 DI (OF) 4

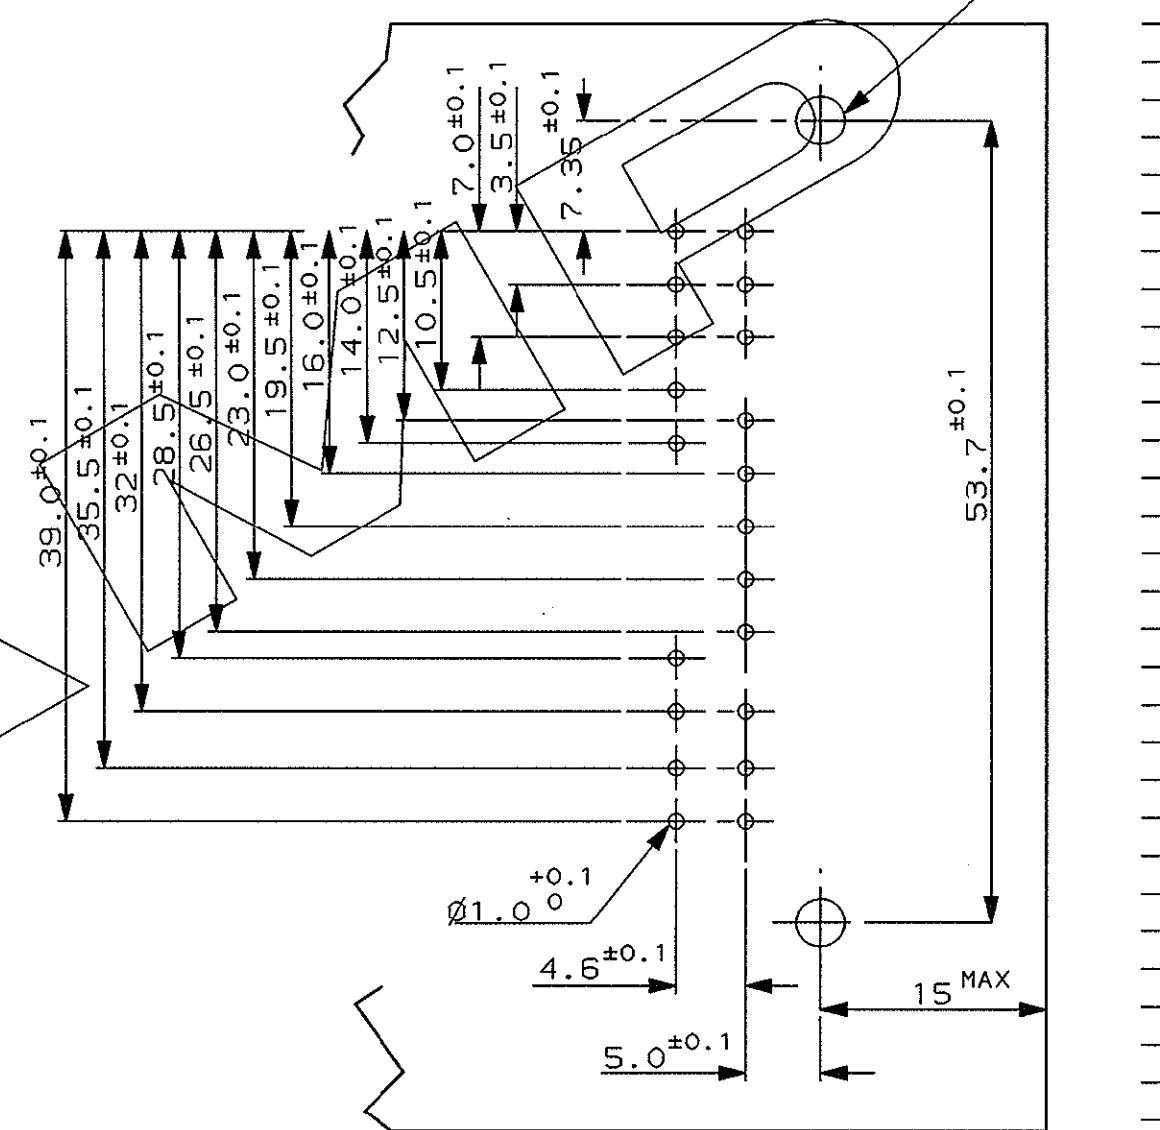[illegible]

GRIGIO (GREY)		PBT NAT. (PBT UNAT)		282632-4	
FINITURA / COLORE (FINISH / COLOUR)		MATERIALE (MATERIAL)		NUMERO (PART NUMBER)	
CUSTOMER DWG. FOR REFERENCE ONLY			DISEGNO PER CLIENTE SOLO PER RIFERIMENTO		
THIS DRAWING IS UNPUBLISHED			RELEASE FOR PUBLICATION		
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING					
TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO		DIAM. ISOLANTE (INS. DIA. RANGE)		RANGO FILO (WIRE RANGE)	
(TOLERANCES, UNLESS OTHERWISE SPECIFIED)		-		-	
± 0.3				SCALA (SCALE)	
ANGOLI (ANGLES)		± 2°		2:1	
DIS. (DR.)		DESCRIZIONE (DESCRIPTION) 070 Sr. MULTILOCK* CONN.			
CONT. (CHK)		HEADER, 20 POSITION HORIZONTAL TYPE			
APP. (APP.)		LOC. SIZE NUMERO (DWG NO)		REV. FOGLIO (SHEET)	
SEE SHEET 1 OF A		I A3 C - 282632		B 4 D1 (OF) 4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[282632-1](#)