

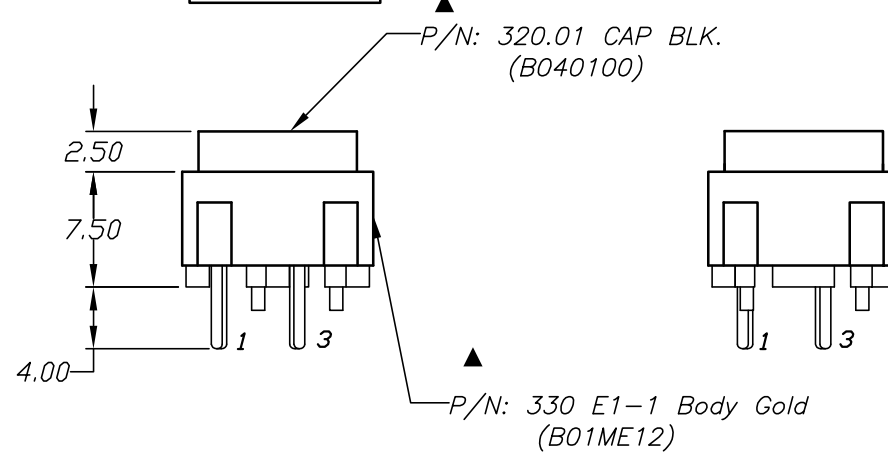
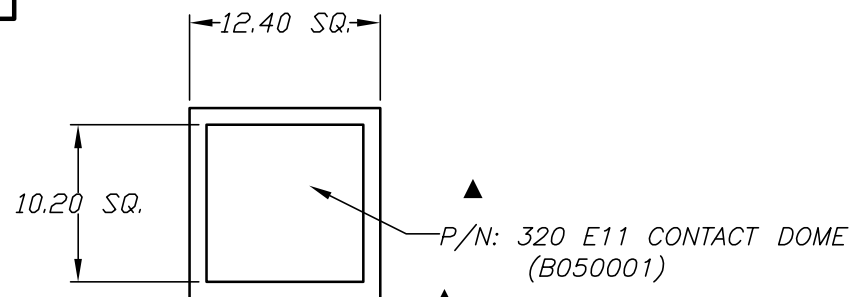


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 25mA, @50V DC
5. ELECTRICAL LIFE: 1,000,000 CYCLES TYP.
6. CONTACT RESISTANCE: 10 MILLI-OHMS,
MAX @ 2-4 VDC, 100mA
7. OPERATING FORCE: 120gf
- ▲ 8. TERMINALS TO BE GOLD PLATED
9. ▲ DENOTES CRITICAL PARAMETER.

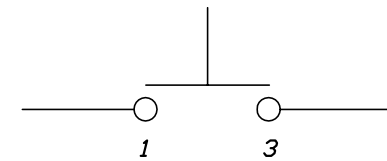

CIRCUIT: SPST
CONTACT CONFIGURATION

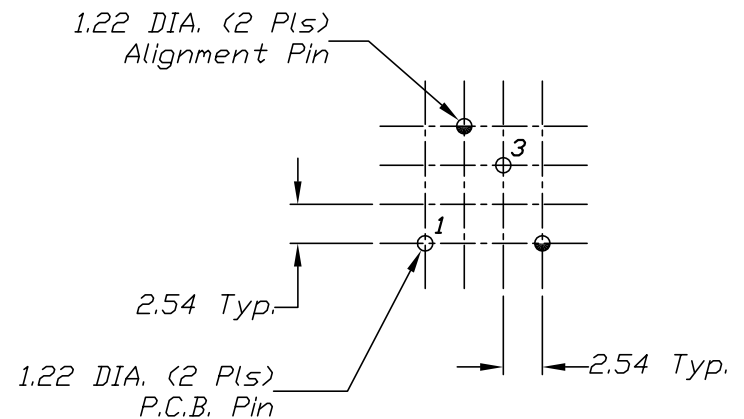

RECOMMEND P.C.B. LAYOUT

E-SWITCH®

TITLE

330.01 E1-1 BLK. (Gold Plated Contacts)

SCALE

2:1

DATE

7/12/04

DR

AR

DWG

XB0001A

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	14162	RELEASED FOR PRODUCTION	7/12/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHK'D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[330.01E11BLK](#)