


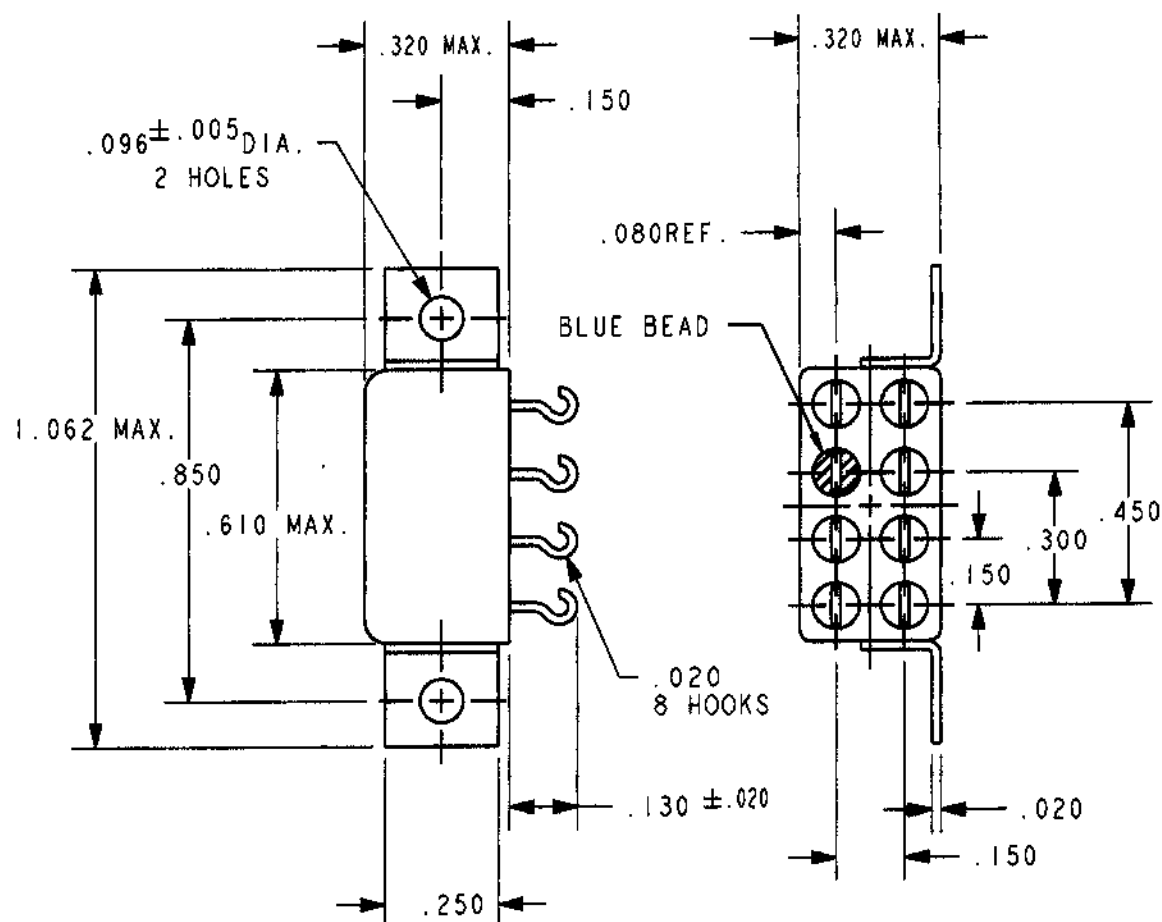

REV. 0
DCO # 143108

TOL. = $\pm$.010

COIL: @ 25°C

RESISTANCE 1350 OHMS $\pm$ 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's


SHOCK 100 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.

BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. BSH 07/18/01

CK. 7/18/01

CII Technologies
advanced control electronic solutions

CUST. CII STANDARD

CUST. NO. REV.

"3SBC" RELAY

3SBC5251K1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SBC5251K1](#)