


NOTES:

CRIMPING:
 USE CRIMP TOOL: 360X10409X
 WITH TOOL INSERT: 360X20029X
 SELECTOR SETTINGS: 7 FOR AWG 10
 6 FOR AWG 12

plating	part no.
GOLD FLASH over NICKEL	131A11039X
30µin HARD GOLD over min. 50µin NICKEL	131C11039X
50µin HARD GOLD over min. 50µin NICKEL	131J11039X

STRIPPING DIMENSIONS

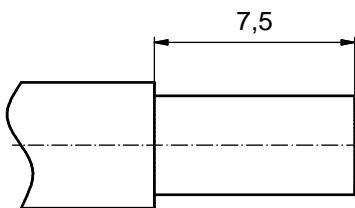

Directive 2002/95/EC RoHS compliant

pos	qty	description	material	plating
3	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
2	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL
1	1	MATING SIDE	COPPER ALLOY	see table

partlist				
1 x b	A4380	12.07.12	HS	
a	Original			
rev.	description	date	name	

tolerance	dim. in mm	scale:	8:1
		material:	see partlist
drawn	12.07.12	Schmidt	
appd.	12.07.12	Koch	
norm			
d-old	13K11D3A / 13K21D3A	title:	HIGH POWER CONTACT MALE CRIMP VERSION 30A FOR AWG 10-12 D-SUB COMBINATION
dwg no:			DIN-A3
13K1A4010			sh: 1
part no:			see table



THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
 DO NOT ALTER CAD DRAWING BY HAND

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[131C11039X](#)