

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

[Home](#)
[About Us](#)
[Contact Us](#)

© COPYRIGHT - By -

By -

ALL RIGHTS RESERVED

REVISIONS

P	LTR
---	-----

LIR

DESCRIPTION

DATE _____

NAME _____

APVT

3

REVI

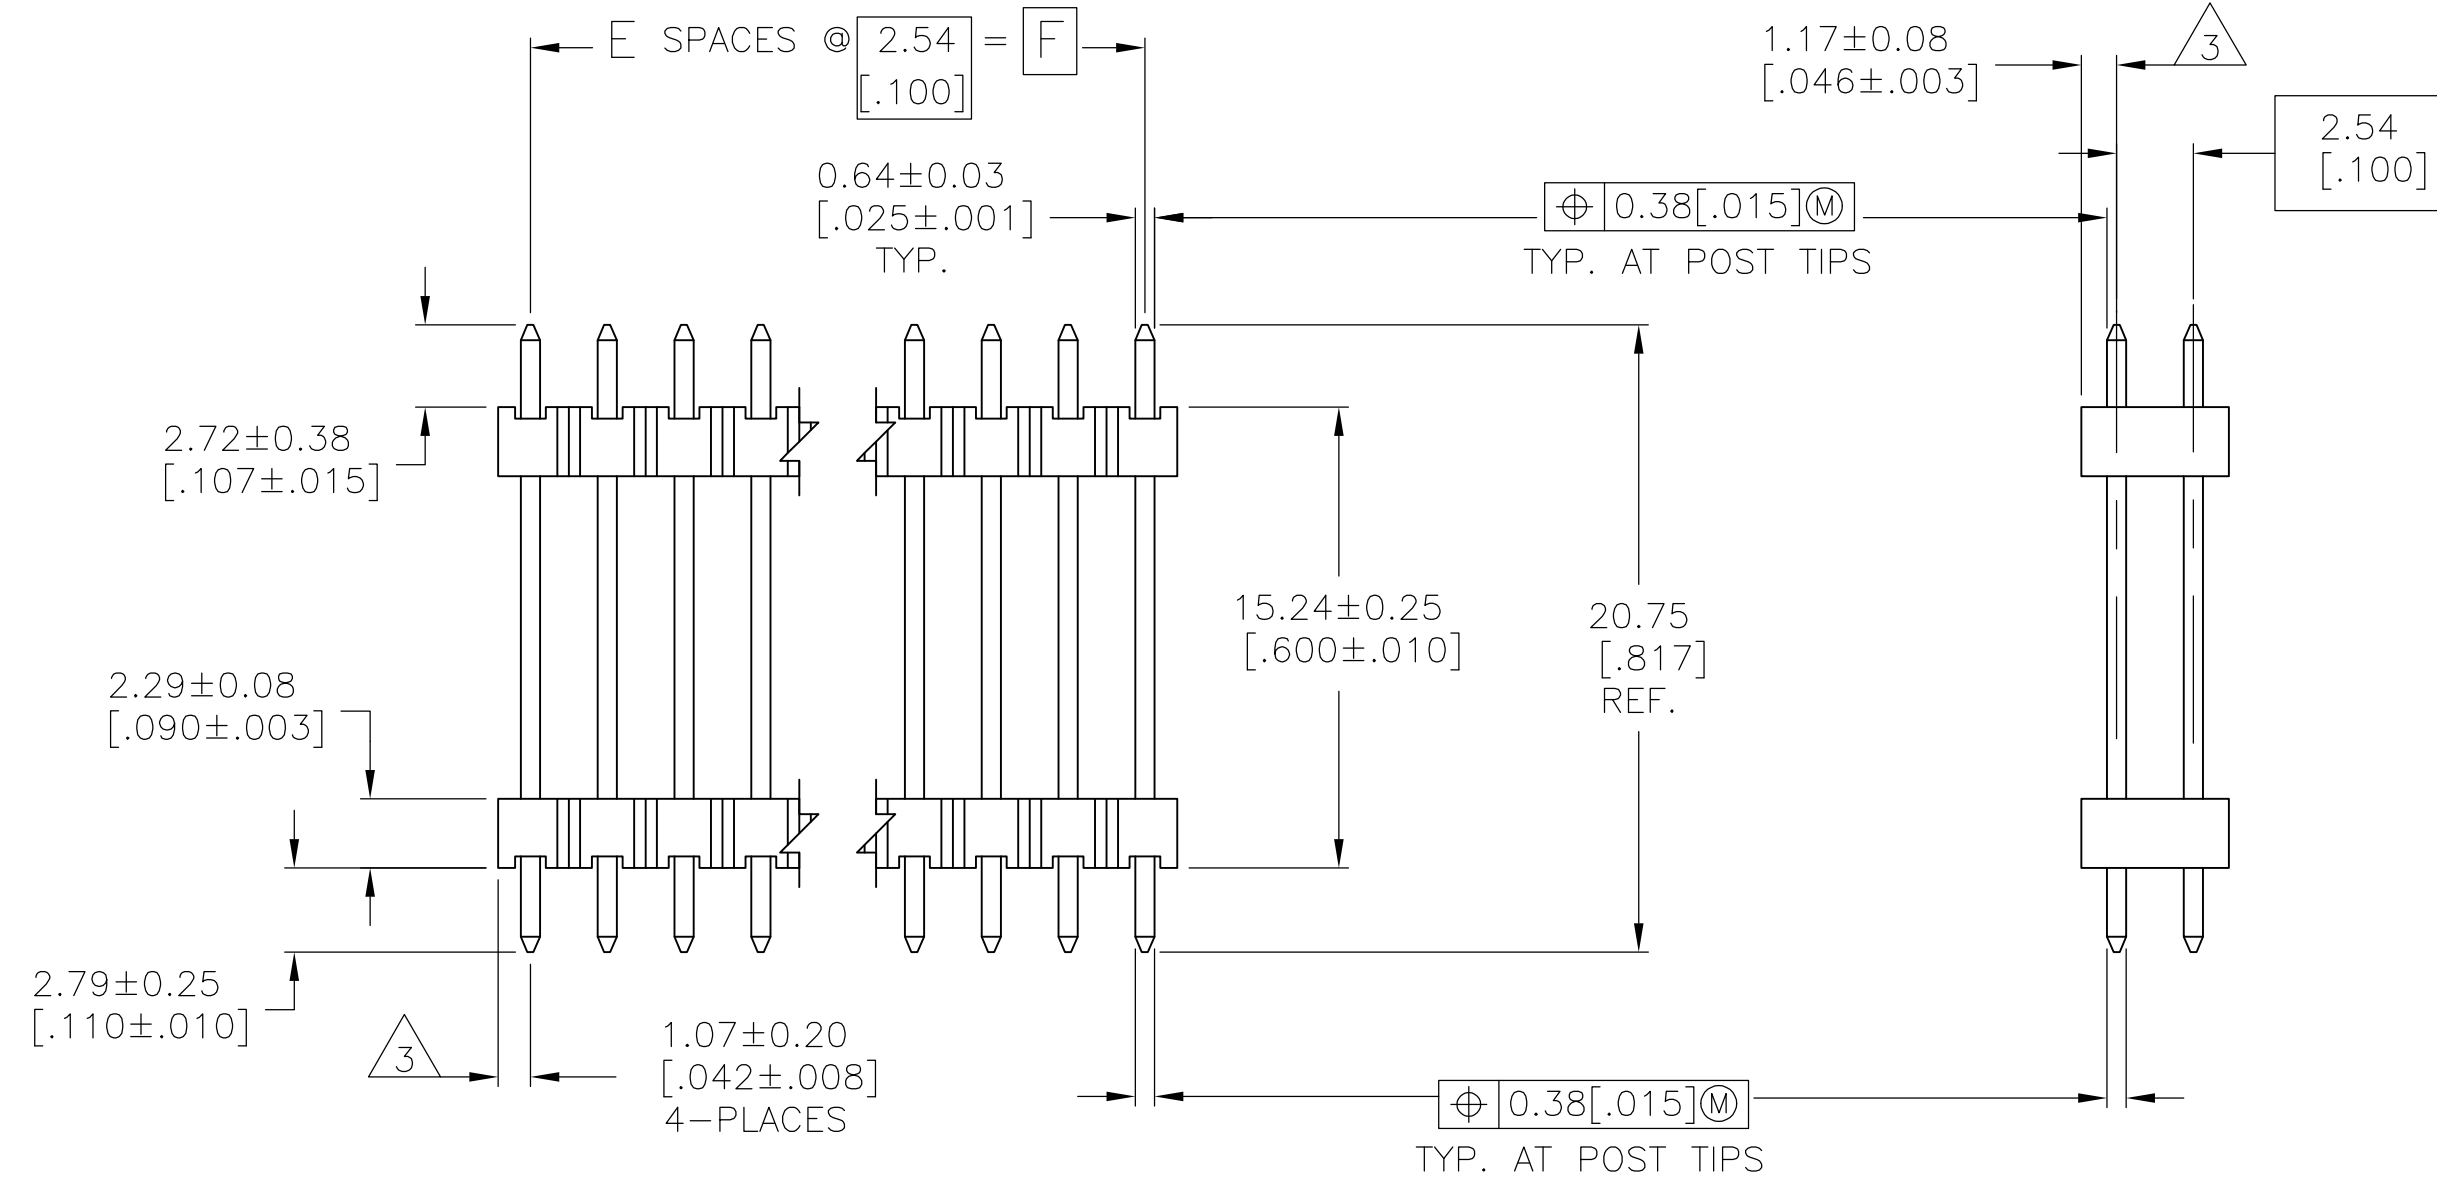
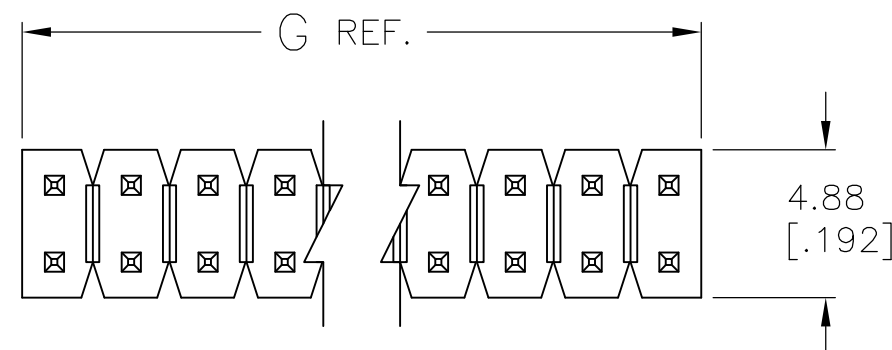
ED P

FCO-16-006307

08AUG201
















NK

MN



1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
CONTACT: COPPER ALLOY
5. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD
OVER 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN
OVER 0.00127 [.000050] NICKEL ENTIRE POST.

OBSOLETE		101.19 [3.984]	99.06 [3.900]	39	80	—9—146491—0—	
		98.65 [3.884]	96.52 [3.800]	38	78	—8—146491—9—	
		96.11 [3.784]	93.98 [3.700]	37	76	—8—146491—8—	
		93.57 [3.684]	91.44 [3.600]	36	74	—8—146491—7—	
		91.03 [3.584]	88.90 [3.500]	35	72	—8—146491—6—	
		88.49 [3.484]	86.36 [3.400]	34	70	—8—146491—5—	
		85.95 [3.384]	83.82 [3.300]	33	68	—8—146491—4—	
		83.41 [3.284]	81.28 [3.200]	32	66	—8—146491—3—	
		80.87 [3.184]	78.74 [3.100]	31	64	—8—146491—2—	
		78.33 [3.084]	76.20 [3.000]	30	62	—8—146491—1—	
		75.79 [2.984]	73.66 [2.900]	29	60	—8—146491—0—	
		73.25 [2.884]	71.12 [2.800]	28	58	—7—146491—9—	
		70.71 [2.784]	68.58 [2.700]	27	56	—7—146491—8—	
		68.17 [2.684]	66.04 [2.600]	26	54	—7—146491—7—	
		65.63 [2.584]	63.50 [2.500]	25	52	—7—146491—6—	
		63.09 [2.484]	60.96 [2.400]	24	50	—7—146491—5—	
		60.55 [2.384]	58.42 [2.300]	23	48	—7—146491—4—	
		58.01 [2.284]	55.88 [2.200]	22	46	—7—146491—3—	
		55.47 [2.184]	53.34 [2.100]	21	44	—7—146491—2—	
		52.93 [2.084]	50.80 [2.000]	20	42	—7—146491—1—	
		50.39 [1.984]	48.26 [1.900]	19	40	—7—146491—0—	
		47.85 [1.884]	45.72 [1.800]	18	38	—6—146491—9—	
		45.31 [1.784]	43.18 [1.700]	17	36	—6—146491—8—	
		42.77 [1.684]	40.64 [1.600]	16	34	—6—146491—7—	
		40.23 [1.584]	38.10 [1.500]	15	32	—6—146491—6—	
	OBSOLETE		37.69 [1.484]	35.56 [1.400]	14	30	6—146491—5—
			35.15 [1.384]	33.02 [1.300]	13	28	—6—146491—4—
			32.61 [1.284]	30.48 [1.200]	12	26	—6—146491—3—
			30.07 [1.184]	27.94 [1.100]	11	24	—6—146491—2—
			27.53 [1.084]	25.40 [1.000]	10	22	—6—146491—1—
		24.99 [.984]	22.86 [.900]	9	20	—6—146491—0—	
		22.45 [.884]	20.32 [.800]	8	18	—5—146491—9—	
		19.91 [.784]	17.78 [.700]	7	16	—5—146491—8—	
		17.37 [.684]	15.24 [.600]	6	14	—5—146491—7—	
		14.83 [.584]	12.70 [.500]	5	12	—5—146491—6—	
		12.29 [.484]	10.16 [.400]	4	10	—5—146491—5—	
		9.75 [.384]	7.62 [.300]	3	8	—5—146491—4—	
		7.21 [.284]	5.08 [.200]	2	6	—5—146491—3—	
		4.67 [.184]	2.54 [.100]	1	4	—5—146491—2—	
		2.13 [.084]	— —	—	2	—5—146491—1—	
		PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

OBSOLETE		101.19 [3.984]	99.06 [3.900]	39	80	4-146491-0
		98.65 [3.884]	96.52 [3.800]	38	78	3-146491-9
		96.11 [3.784]	93.98 [3.700]	37	76	3-146491-8
		93.57 [3.684]	91.44 [3.600]	36	74	3-146491-7
		91.03 [3.584]	88.90 [3.500]	35	72	3-146491-6
		88.49 [3.484]	86.36 [3.400]	34	70	3-146491-5
		85.95 [3.384]	83.82 [3.300]	33	68	3-146491-4
		83.41 [3.284]	81.28 [3.200]	32	66	3-146491-3
		80.87 [3.184]	78.74 [3.100]	31	64	3-146491-2
		78.33 [3.084]	76.20 [3.000]	30	62	3-146491-1
		75.79 [2.984]	73.66 [2.900]	29	60	3-146491-0
		73.25 [2.884]	71.12 [2.800]	28	58	2-146491-9
		70.71 [2.784]	68.58 [2.700]	27	56	2-146491-8
		68.17 [2.684]	66.04 [2.600]	26	54	2-146491-7
		65.63 [2.584]	63.50 [2.500]	25	52	2-146491-6
		63.09 [2.484]	60.96 [2.400]	24	50	2-146491-5
		60.55 [2.384]	58.42 [2.300]	23	48	2-146491-4
		58.01 [2.284]	55.88 [2.200]	22	46	2-146491-3
		55.47 [2.184]	53.34 [2.100]	21	44	2-146491-2
		52.93 [2.084]	50.80 [2.000]	20	42	2-146491-1
		50.39 [1.984]	48.26 [1.900]	19	40	2-146491-0
		47.85 [1.884]	45.72 [1.800]	18	38	1-146491-9
		45.31 [1.784]	43.18 [1.700]	17	36	1-146491-8
		42.77 [1.684]	40.64 [1.600]	16	34	1-146491-7
		40.23 [1.584]	38.10 [1.500]	15	32	1-146491-6
		37.69 [1.484]	35.56 [1.400]	14	30	1-146491-5
		35.15 [1.384]	33.02 [1.300]	13	28	1-146491-4
		32.61 [1.284]	30.48 [1.200]	12	26	1-146491-3
		30.07 [1.184]	27.94 [1.100]	11	24	1-146491-2
		27.53 [1.084]	25.40 [1.000]	10	22	1-146491-1
		24.99 [.984]	22.86 [.900]	9	20	1-146491-0
		22.45 [.884]	20.32 [.800]	8	18	146491-9
		19.91 [.784]	17.78 [.700]	7	16	146491-8
		17.37 [.684]	15.24 [.600]	6	14	146491-7
		14.83 [.584]	12.70 [.500]	5	12	146491-6
		12.29 [.484]	10.16 [.400]	4	10	146491-5
		9.75 [.384]	7.62 [.300]	3	8	146491-4
		7.21 [.284]	5.08 [.200]	2	6	146491-3
		4.67 [.184]	2.54 [.100]	1	4	146491-2
		2.13 [.084]	- -	-	2	146491-1
	PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

[illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-146491-7](#)