

PowerMod HP connectors, developed by Anderson Power Products, are the innovative New Generation of High Power Interconnections for the Electronics Industry.

The touch-safe, positive latching, PowerMod HP female connector design presents a new standard for high power connector safety. The ergonomic latch release is simple to operate and is colored blue for clear identification. Housings are a black UL94 V-0 flame retardant material.

PowerMod HP contacts are durable and rated for circuit interruption (true hot-pluggable). Series A contacts are available in #6 to #2 American wire gauge and 16mm² to 35mm² metric wire sizes for global design freedom. Our optional strain relief ensures superior contact reliability under adverse operating conditions.

The PowerMod HP connectors embody the highest quality in the industry and meet all applicable industry standards.

Features

- **Positive latching**

Integral latches with ergonomic release provide over 50 lbs retention

- **Strain relief option**

Reduces risk of wire insulation creep and reduces transmission of wire loads to contacts improving service life

- **Low connector mating forces**

Connectors are easily mated and un-mated

- **Silver plated, high conductivity contacts**

Offers greater longevity for high power, elevated temperature applications

- **Ease of assembly**

Intuitive design allows for simplicity of assembly



SPECIFICATIONS

Electrical			Mechanical	
Current Rating (Amperes)			Mating Force	15 lbs. (66.72N) avg
UL		210	Latch Retention Force	50 lbs. (222N) min
CSA (30°C Rise)		130	Contact Retention Force	100 lbs. (445N) min
UL / CSA Voltage Rating		600	Mating	
Wire Size (AWG)		#6 to #2	a. No Load (mating cycles)	500
(mm²)		16 to 35	b. Under Load (Hot Plug 250 mating cycles @ 120V)	80A
Dielectric Withstanding Voltage (AC)		2200	Materials	
Operating Temperature (°C)		-40° to 130°	Housing & Cable Clamp	PBT UL94 V-0
(°F)		-40° to 266°	Latch	PEI UL94 V-0
Ambient Temperature (°C)		-40° to 85°	Contacts	Copper alloy silver plate
(°F)		-40° to 185°	Hardware	Steel zinc chromate



File No. E26226

ORDERING INFORMATION

PowerMod HP Part Number Plan - Dual Pole Male

Series	Series	Gender	Model	Wire Size
PMHP	A	M	11	P05
A *				
M - Male				
11 - Dual Pole Straight				
12 - Dual Pole Straight with Cable Clamp				
P05 - 6 AWG				
P04 - 16mm²				
P03 - 4 AWG				
P02 - 25mm²				
P01 - 2 AWG & 35mm²				
* Maximum wire size 2 AWG or 35mm²				

Components

Part Number	Description
PMHPAM11	Housing Kit, Male, Dual Pole, Straight
PMHPAM12	Housing Kit with Cable Clamp, Male, Dual Pole, Straight
PMHPAP05	Pin, Series A, Crimp for 6 AWG wire
PMHPAP04	Pin, Series A, Crimp for 16mm² wire
PMHPAP03	Pin, Series A, Crimp for 4 AWG wire
PMHPAP02	Pin, Series A, Crimp for 25mm² wire
PMHPAP01	Pin, Series A, Crimp for 2 AWG & 35mm² wire
PMHPAC02	Dual Pole Cable Clamp Kit

Dual Pole Male - Series A

ORDERING INFORMATION


Tooling

Pneumatic Production Tool				
Wire Size	Part Number	Die P/N	Locator P/N	Number of Crimps
#2 AWG 35mm ²	1387G2	1303G13	1304G19	2
25mm ²	1387G2	1303G13	1304G19	2
#4 AWG	1387G2	1303G14	1304G19	2
16mm ²	1387G2	1303G14	1304G19	2
#6 AWG	1387G2	1303G14	1304G19	2


Hand Tool				
Wire Size	Hydraulic	Battery	Die P/N	Number of Crimps
#2 AWG 35mm ²	1387G3	1370G1	1322G7	2
25mm ²	1387G3	1370G1	1322G11	2
#4 AWG	1387G3	1370G1	1322G8	2
16 mm ²	1387G3	1370G1	1322G10	2
#16 AWG	1387G3	1370G1	1322G9	2

DIMENSIONS


Front Without Strain Relief





Side



Front With Strain Relief



TEMPERATURE CHART

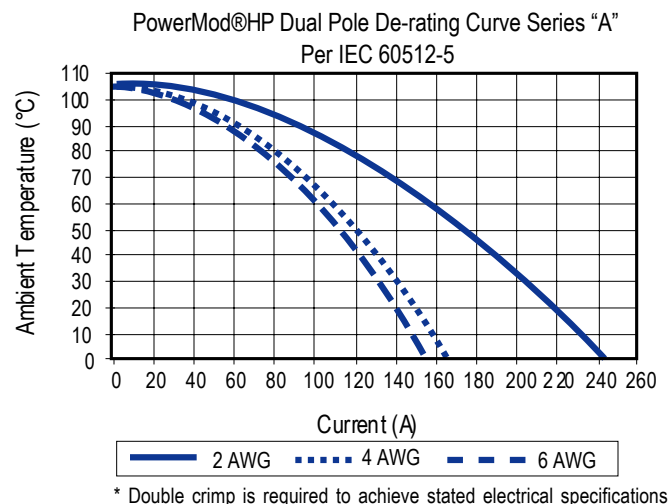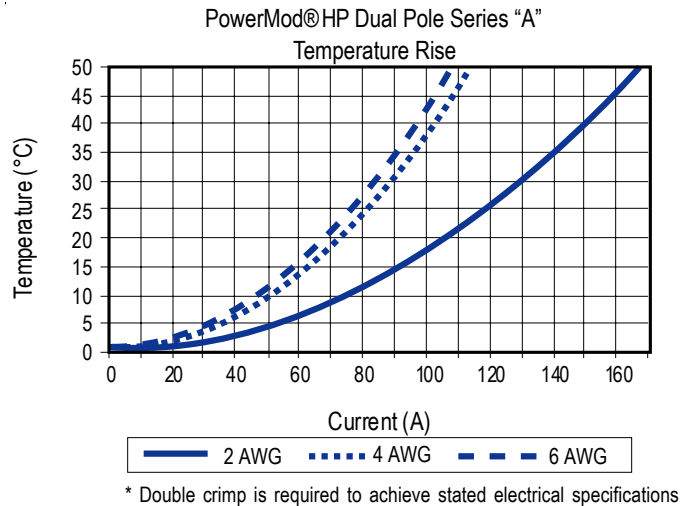

MATING CONNECTORS

Dual Pole Straight Female



Dual Pole Right Angle Female



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Anderson Power Products:

[PMHPAC02](#) [PMHPAM11](#) [PMHPAM11P05](#) [PMHPAM12](#) [PMHPAM12P05](#) [PMHPAP01](#) [PMHPAP02](#) [PMHPAP03](#)
[PMHPAP04](#) [PMHPAP05](#)